


The 3rd INTERNATIONAL SEMINAR ON FUNDAMENTAL AND APPLICATION OF CHEMICAL ENGINEERING 2016

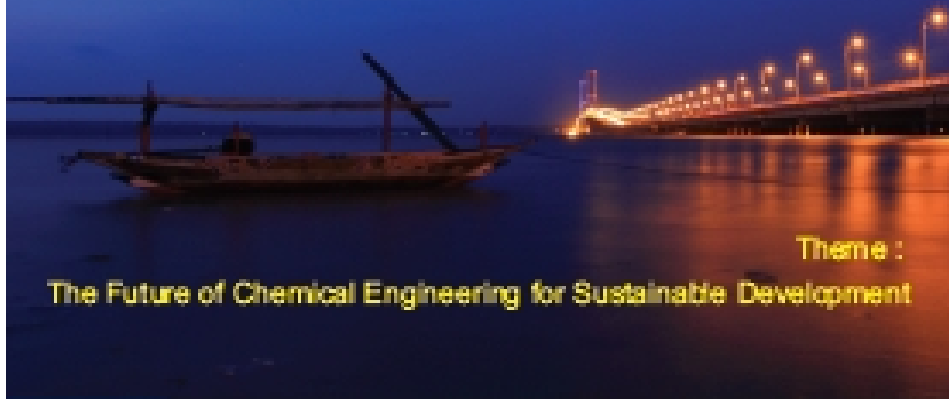

Theme :
The Future of Chemical Engineering for Sustainable Development

1 - 2 November 2016
Surabaya, Indonesia

Conference Organized
Department of Chemical Engineering
Faculty of Industrial Technology
Institut Teknologi Sepuluh Nopember


JOINTLY COLABORATED WITH

**APTEKINDO
BKK-PII**



International Seminar on Fundamental and Application of Chemical Engineering 2016 (ISFACChE 2016)

Proceedings of the 3rd International Seminar
on Fundamental and Application of Chemical
Engineering 2016

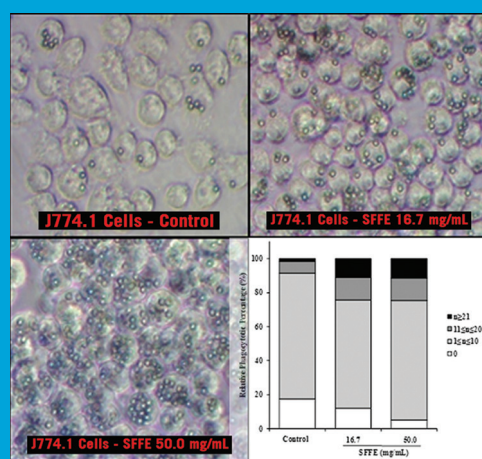

East Java, Indonesia
1-2 November 2016

Editors

Fadlilatul Taufany, W. Widiyastuti and Siti Nurkhamidah

AIP | Conference Proceedings

proceedings.aip.org

AIP | Conference Proceedings



AIP Conference Proceedings: A name your community will know and respect

40 years' experience • 100,000+ papers • 1,700+ volumes

A world-class proceedings service for all events: From workshops to the largest international conference

- Online-only proceedings
- Optional printed copies or CDs for participants
- Rapid online and print publication

Our wealth of experience and expertise will ensure an outstanding publication experience.

Publication fees which work with your budget

- **Simple online publication fees:** Completely independent of page counts, publish substantial papers at no extra cost.
- **Options for online access:** 1-year conference access or select perpetual open access for the entire community.

Flexibility in the printed medium

Choose from these options to print all papers or just a selection of articles from the conference:

Conference collection

- Printed copies containing all papers published in the online proceedings.
- For editors who want to reproduce all online papers for their participants.

Selected papers

- Printed copies containing a selection of papers chosen by the editors.
- Choose to print just the best work, avoid the cost of printing everything.

Workshops and summer schools

- Printed copies designed especially for summer schools and workshops.
- Visibility and identity for events publishing tutorials and reviews.

Get a proposal for your proceedings in 3 simple steps

Step 1.

Obtain a proceedings questionnaire by writing to us at confproc@aip.org or download from proceedings.aip.org

Step 2.

Fill in the questionnaire with details of your conference and return it to confproc@aip.org

Step 3.

We'll review the questionnaire and your requirements and write to confirm if we can offer a proposal.



ISBN 978-0-7354-1510-2
ISSN 0094-243X

proceedings.aip.org



International Seminar on Fundamental and Application of Chemical Engineering 2016 (ISFACHE 2016)

Vol. 1840

International Seminar on Fundamental and Application of Chemical Engineering 2016 (ISFAChE 2016)

Proceedings of the 3rd International Seminar
on Fundamental and Application of Chemical
Engineering 2016

East Java, Indonesia

1-2 November 2016

Editors

Fadlilatul Taufany

W. Widiyastuti

Siti Nurkhamidah

Institut Teknologi Sepuluh Nopember, East Java, Indonesia

Sponsoring Organizations

Institut Teknologi Sepuluh Nopember

PT. Pertamina

PT. Pupuk Indonesia

PT. Semen Indonesia

PT. Semen Tonasa

PT. Petrokimia Gresik

PT. IPMOMI

PT. TJB Power Services

PT. Bank Mandiri

PT. Pembangunan Jawa Bali

PT. Pertamina Lubricants

PT. Pupuk Iskandar Muda

PT. Semen Padang

All papers have been peer reviewed.



Melville, New York, 2017
AIP Conference Proceedings

Volume 1840

To learn more about AIP Conference Proceedings visit <http://proceedings.aip.org>

Editors

Fadlilatul Taufany

W. Widiyastuti

Siti Nurkhamidah

Institut Teknologi Sepuluh Nopember
Department of Chemical Engineering
Kampus ITS Sukolilo
Surabaya 60111
East Java
Indonesia

Email: f_taufany@chem-eng.its.ac.id
taufany99@yahoo.com
widi@chem-eng.its.ac.id
dst_eureka@yahoo.co.uk
nurkhamidah@chem-eng.its.ac.id

Authorization to photocopy items for internal or personal use, beyond the free copying permitted under the 1978 U.S. Copyright Law (see statement below), is granted by the AIP Publishing LLC for users registered with the Copyright Clearance Center (CCC) Transactional Reporting Service, provided that the base fee of \$30.00 per copy is paid directly to CCC, 222 Rosewood Drive, Danvers, MA 01923, USA: <http://www.copyright.com>. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. The fee code for users of the Transactional Reporting Services is: 978-0-7354-1510-2/17/\$30.00



© 2017 AIP Publishing LLC

No claim is made to original U.S. Government works.

Permission is granted to quote from the AIP Conference Proceedings with the customary acknowledgment of the source. Republication of an article or portions thereof (e.g., extensive excerpts, figures, tables, etc.) in original form or in translation, as well as other types of reuse (e.g., in course packs) require formal permission from AIP Publishing and may be subject to fees. As a courtesy, the author of the original proceedings article should be informed of any request for republication/reuse. Permission may be obtained online using RightsLink. Locate the article online at <http://proceedings.aip.org>, then simply click on the RightsLink icon/"Permissions/Reprints" link found in the article abstract. You may also address requests to: AIP Publishing Office of Rights and Permissions, 1305 Walt Whitman Road, Suite 300, Melville, NY 11747-4300, USA; Fax: 516-576-2450; Tel.: 516-576-2268; E-mail: rights@aip.org.

ISBN 978-0-7354-1510-2

ISSN 0094-243X

Printed in the United States of America

AIP Conference Proceedings, Volume 1840
International Seminar on Fundamental and Application of
Chemical Engineering 2016 (ISFACHE 2016)
Proceedings of the 3rd International Seminar on Fundamental
and Application of Chemical Engineering 2016

Table of Contents

Preface: The 3rd International Seminar on Fundamental and Application of Chemical Engineering 2016 (ISFACHE 2016)	010001
--	--------

PLENARY AND INVITED PAPERS

Reaction of Cl⁻ ions in electrolyte solution induced electrical discharge plasma in the presence of argon fine bubbles Yui Hayashi, Noriharu Takada, Wahyudiono, Hideki Kanda, and Motonobu Goto	020001
Interpolation techniques in robust constrained model predictive control Soorathep Kheawhom and Pornchai Bumroongsri	020002

CONTRIBUTED PAPERS

Biochemical Engineering

Effect of temperature on the application of <i>Myrmecodia Pendans</i> extract for environmentally friendly corrosion inhibitor Atria Pradityana, Sulistijono, Winarto, Eddy Widiyono, Budi Luwar, and Mahirul Mursid	030001
Modeling of adsorption isotherms on the addition of an inhibitor <i>Myrmecodia Pendans</i> extract with temperature variation Atria Pradityana, Sulistijono, Nur Husodo, Gatot Dwi Winarto, Sri Bangun, and Bambang Sampurno	030002
The influence of biofilm formation on electricity production from tempe wastewater using tubular membraneless microbial fuel cell reactor Nathania Dwi Karina Siagian, Rita Arbianti, and Tania Surya Utami	030003
Combined subcritical water and enzymatic hydrolysis for reducing sugar production from coconut husk Maktum Muharja, Fitri Junianti, Tantular Nurtono, and Arief Widjaja	030004
Cultivation of <i>Chlorella vulgaris</i> using different sources of carbon and its impact on lipid production Yunus Fransiscus and Edy Purwanto	030005
Effect of temperature and mixing speed on immobilization of crude enzyme from <i>Aspergillus niger</i> on chitosan for hydrolyzing cellulose Afan Hamzah, Gek Ela Kumala P., Dwi Ramadhani, Nurul Maziyah, Laila Nur Rahmah, Soeprijanto, and Arief Widjaja	030006
Simulation and optimization of continuous extractive fermentation with recycle system Tri Widjaja, Ali Altway, Umi Rofiqah, and Bramantyo Airlangga	030007

Catalysis and Reaction Engineering

Direct synthesis of hydrogen peroxide using in-situ selective layer I. G. B. N. Makertihartha, P. T. Dharmawijaya, M. Zunita, and I. G. Wenten	040001
Esterification of palm fatty acid distillate with epychlorohydrin using cation exchange resin catalyst Budhijanto Budhijanto and Albertus F. P. H. Subagyo	040002
Kinetics study of carbon dioxide absorption reaction into the promoted methyldiethanolamine solution Yasmikha Tiurlan Susanti Sitorus, Hanna Sucita Taurina, Ali Altway, Yeni Rahmawati, and Siti Nurkhamidah	040003
The influence of using sonicator type to produce alcohol in the glycerol degradation process Ruslan Kalla, S. Sumarno, and M. Mahfud.	040004
Immobilizing of catalyst using Bayah's natural zeolite to reduce the chemical oxygen demand (COD) and total organic carbon (TOC) Jayanudin, Indar Kustiningsih, and Denni Kartika Sari	040005
The use of mud as an alternative source for bioelectricity using microbial fuel cells Raden Darmawan, Arief Widjaja, Sri Rachmania Juliastuti, Nuniek Hendrianie, Chanifah Hidayat, Dessy Rosita Sari, Suwito, Shigeru Morimura, and Masato Tominaga	040006
Transesterification of coconut oil for FAME production using ultrasound Eko Supriadi, Lenny Marlinda, Danawati Hari Prajitno, and Mahfud Mahfud	040007
Conventional and Renewable Energy	
Esterification free fatty acid in sludge palm oil using ZrO_2/SO_4^{2-} – rice husk ash catalyst Arif Hidayat and Bachrun Sutrisno	050001
Feasibility study of NaOH regeneration in acid gas removal unit using membrane electrolysis Fadlilatul Taufany, Alvian Pratama, and Muhammad Romzuddin	050002
The effect of adding selective mixed culture of alternative electricity production based on tempe wastewater on tubular microbial fuel cell Mariana, Elisabeth, Tania Surya Utami, Rita Arbianti, and Heri Hermansyah	050003
Effect of agitation on methanogenesis stage of two-stage anaerobic digestion of palm oil mill effluent (POME) into biogas Bambang Trisakti, Irvan, Intan Zahara, Taslim, and Muhammad Turmuzi	050004
CO₂ desorption from glycerol for reusable absorbent Aswati Mindaryani, Wiratni Budhijanto, and Roberto Delta Narendratama	050005
Purification of biodiesel by choline chloride based deep eutectic solvent Helda Niawanti, Siti Zullaikah, and M. Rachimoellah	050006



Food Technology

The effect of coconut oil and palm oil as substituted oils to cocoa butter on chocolate bar texture and melting point	
Rebecca Putri Limbardo, Herry Santoso, and Judy Retti Witono	060001
Drying performance of fermented cassava (fercaf) using a convective multiple flash dryer	
Lienda A. Handojo, Samuel Zefanya, and Yohanes Christanto	060002
Development of parmesan cheese production from local cow milk	
Lienda Aliwarga, Elisabeth Novi Christianti, and Chrisella Lazarus	060003
Fatty acid fragmentation of triacylglycerol isolated from crude nyamplung oil	
Hakun Wirawasista Aparamarta, Desy Anggraini, Della Istianingsih, David Febrilliant Susanto, Arief Widjaja, Yi-Hsu Ju, and Setiyo Gunawan	060004
Modification of cassava starch using combination process lactic acid hydrolysis and micro wave heating to increase coated peanut expansion quality	
Siswo Sumardiono, Isti Pudjihastuti, Bakti Jos, Muhammad Taufani, and Faad Yahya	060005
Combination process method of lactic acid hydrolysis and hydrogen peroxide oxidation for cassava starch modification	
Siswo Sumardiono, Isti Pudjihastuti, Budiyo, Hansen Hartanto, and Intan Clarissa Sophiana	060006
Immunostimulatory activity of snake fruit (<i>Salacca edulis</i> Reinw.) cultivar Pondoh Hitam extract on the activation of macrophages in vitro	
Sri Wijanarti, Agus Budiawan Naro Putra, Kosuke Nishi, Eni Harmayani, and Takuya Sugahara	060007
Production of carrageenan from seaweed (<i>Eucheuma cottoni</i>) with KOH treatment	
Suci Ninghidayati, Arina Nurlaili R., Ignatius Gunardi, and Achmad Roesyadi	060008
Hydrothermal extraction of antioxidant compounds from mangosteen pericarp with low-transition-temperature mixture and sonication pretreatment	
Siti Machmudah, Widiyastuti, Tantular Nurtono, Sugeng Winardi, Wahyudiono, Hideki Kanda, and Motonobu Goto	060009
Modeling and Process System Engineering	
APC implementation in Chandra Asri – ethylene plant	
Mochamad Sidiq and Ali Mustofa	070001
The application of adaptive Luenberger observer concept in chemical process control: An algorithmic approach	
Marthen Luther Doko	070002
The application of adaptive observer with auxilliary input in chemical process control: An algorithmic approach	
Marthen Luther Doko	070003



Ultrasound assisted extraction of natural dye from jackfruit's wood (<i>Artocarpus heterophyllus</i>): The effect of ethanol concentration as a solvent	
Ike Dayi Febriana, Selfina Gala, and Mahfud Mahfud	070004
Research and development in pilot plant production of granular NPK fertilizer	
Muhamad Fariz Failaka, Nadia Zahrotul Firdausi, Chairunnisa, and Ali Altway	070005
Process control on modified III Quadruple Tank using LabVIEW application	
Zahrotul Azizah, Amalia Dyah Arlita, Santi Puteri Rahayu, Imam Arifin, Anwaruddin Hisyam, Renanto, and Juwari	070006
Technical and economical evaluation of carbon dioxide capture and conversion to methanol process	
Aditya Anugerah Putra, Juwari, and Renanto Handogo	070007
Computational fluid dynamic in combustion process using pulse combustor	
Annie Mufyda Rahmatika, W. Widiyastuti, Siti Machmudah, Tantular Nurtono, and Sugeng Winardi	070008
The influence of fuel type to combustion characteristic in diffusion flame drying by computational fluid dynamics simulation	
Eka Lutfi Septiani, W. Widiyastuti, Siti Machmudah, Tantular Nurtono, and Sugeng Winardi	070009
Nanomaterials and Nanotechnologies	
The effect of temperature and chitosan concentration during storage on the growth of chitosan nanoparticle produced by ionic gelation method	
Wenny Rinda Handani, Wahyudi Budi Sediawan, Ahmad Tawfiequrrahman, Wiratni, and Yuni Kusumastuti	080001
Effect of delignification process on physical properties of sugarcane baggase paper	
Natalia Suseno, Lanny Sapei, Edy Purwanto, and Tokok Adiarto	080002
Synthesis of ACNT on quartz substrate with catalytic decomposition reaction from <i>Cinnamomum camphora</i> by using FC-CVD method	
Praswasti P. D. K. Wulan and Toni Partogi Johannes Silaen	080003
The effects of surfactant and electrolyte concentrations on the size of nanochitosan during storage	
Annisa Primaningtyas, Wiratni Budhijanto, Mohammad Fahrurrozi, and Yuni Kusumastuti	080004
Electrophoretic deposition of silica on the anodized stainless steel	
Ni Made Intan Putri Suari and Heru Setyawan	080005
The development of Ti₆Al₄V based anti bacterial dental implant modified with TiO₂ nanotube arrays doped silver metal (Ag)	
Slamet, B. M. Bachtiar, P. P. D. K. Wulan, Setiadi, and D. P. Sari	080006
Photocatalytic activity of titania nanotube (tint)-carbon nanotube (CNT) composite for degradation of phenol	
Desi Heltina, Praswasti P. D. K. Wulan, and Slamet	080007

Synthesis of ZnO-SiO₂ nanocomposite particles and their characterization by sonochemical method
W. Widiyastuti, Siti Machmudah, Tantular Nurtono, Sugeng Winardi, and Kikuo Okuyama 080008

Formation of ZnO-SiO₂ particle by spray decomposition method
Lailatul Qomariyah, Miftalia Aisah, Nico Cahyando, W. Widiyastuti, and Sugeng Winardi 080009

Ketoprofen- β -cyclodextrin inclusion complexes formation by supercritical process technology
Sumarno, Rizki Rahim, and Prida Novarita Trisanti 080010

Polymer Engineering and Material Processing

Controlling polypropylene rheological properties by promoting organic peroxide during extrusion with improved properties for automotive applications
Bayu Herlambang and Sandytama 090001

Review of hydrophilic PP membrane for organic waste removal
Danu Ariono and Anita Kusuma Wardani 090002

Chemical enhanced oil recovery (EOR) activities in Indonesia: How it's future
Muslim Abdurrahman 090003

Processing of polyphenolic composites with supercritical fluid anti-solvent technology
Firman Kurniawansyah, Raffaella Mammucari, and Neil R. Foster 090004

Surface engineering of polymer membrane for air separation
Nurul Faiqotul Himma and I. Gede Wenten 090005

The role of ion-exchange membrane in energy conversion
Khoiruddin, Putu T. P. Aryanti, Ahmad N. Hakim, and I. Gede Wenten 090006

Ion adsorption and desorption behaviors of thermosensitive NIPAM-co-DMAAPS gel by temperature swing
Eva Oktavia Ningrum, Agus Purwanto, Hikmatun Ni'mah, Sumarno, Dinny Islamiah Dewitasari, and Eka Octaviyatna Mulyadi 090007

Determination of thermodynamic properties of polysulfone/PEG membrane solutions based on Flory-Huggins model
D. Ariono, P. T. P. Aryanti, A. N. Hakim, S. Subagjo, and I. G. Wenten 090008

Effect of particle size and crystallinity of cellulose filler on the properties of poly(L-lactic acid): Mechanical property and thermal stability
Hikmatun Ni'mah, Eva Oktavia Ningrum, Sumarno, Dwila Nur Rizkiyah, I. G. A. Gede Chandra Divta, Meiliefiana, and Mayang Ayudhawara Subaghio 090009

Separation and Transport Phenomena

Extraction of curcumin from *Curcuma longa* L. using ultrasound assisted supercritical carbon dioxide
Chhouk Kimthet, Wahyudiono, Hideki Kanda, and Motonobu Goto 100001

Simulation and modeling CO₂ absorption in biogas with DEA promoted K₂CO₃ solution in packed column	100002
Siti Nurkhamidah, Ali Altway, Bramantyo Airlangga, and Dwi Putri Emilia	
The effect of feed rate and recycle rate variable on leaching process of Na₂Zro₃ with HCl in continuous stirred tank reactor (CSTR) series	100003
Bekti Palupi, Supranto, Wahyudi Budi Sediawan, and Moch. Setyadji	
The effects of intra-particle concentration gradient on consecutive adsorption-desorption of oryzanol from rice bran oil in packed-column	100004
Ari Diana Susanti, Wahyudi Budi Sediawan, Sang Kompiang Wirawan, and Budhijanto	
The determination of optimum condition in water hyacinth drying process by mixed adsorption drying method and modified fly ash as an adsorbent	100005
Asep Handaya Saputra and Rizky Anggreini Putri	
Langmuir adsorption isotherm analysis on the addition of Myrmecodia Pendans extract as a corrosion inhibitor with a variety of corrosive media	100006
Atria Pradityana, Sulistijono, Subowo, Suhariyanto, Hari Subiyanto, and Liza Rusdiyana	
Jackfruit (<i>Artocarpus heterophyllus lamk</i>) wood waste as a textile natural dye by microwave-assisted extraction method	100007
Lailatul Qadariah, Selfina Gala, Dhaniar Rulandri Widoretno, Delita Kunhermanti, Donny S. Bhuana, Sumarno, and Mahfud	
Extraction of orange peel's essential oil by solvent-free microwave extraction	100008
Lailatul Qadariah, Prilia Dwi Amelia, Cininta Admiralia, Donny S. Bhuana, and Mahfud	
Application of dual membrane contactor for simultaneous CO₂ removal using continues diethanolamine (DEA)	100009
Yeni Rahmawati, Siti Nurkhamidah, Susianto, Nidia Intan Listiyana, and Widyawati Putricahyani	
Modeling turbulent flow in a cylindrical tank agitated by side entering 45° inclined blade turbine using computational fluid dynamics (CFD)	100010
N. N. Fathonah, A. Susanti, T. Nurtono, S. Winardi, S. Machmudah, Kusdianto, and Widiyastuti	
Solubility correlation of anthraquinone derivatives in supercritical carbon dioxide	100011
Ratna Surya Alwi, Kazuhiro Tamura, Tatsuro Tanaka, and Keisuke Shimizu	
Ternary liquid-liquid equilibria of Eugenol + Isobutanol + H₂O and β-Caryophyllene + Isobutanol + H₂O systems at temperatures 303.15 and 323.15 K	100012
Zahrída D. Parameswari, Andre M. Kurniawan, Gede Wibawa, and Kuswandi Kuswandi	
Ternary liquid-liquid equilibrium for eugenol + tert-butanol + water system at 303.15 and 323.15K and atmospheric pressure	100013
Retno Kumala Hesti Sucipto, Kuswandi, and Gede Wibawa	

Waste Treatment Technology

Microwave pyrolysis of multilayer plastic waste (LDPE) using zeolite catalyst	110001
Sri Rachmania Juliastuti, Nuniek Hendrianie, Pandu Jati Ramadhan, and Dama Husin Satria	

Study utilization of extractable petroleum hydrocarbons biodegradation waste as the main material for making solid fuels	Nuniek Hendriane, Sri Rachmania Juliastuti, Fanny Husna Ar-rosyidah, and Hilal Abdur Rochman	110002
Anaerobic digestion of palm oil mill effluent with lampung natural zeolite as microbe immobilization medium and digested cow manure as starter	Lenny Halim, Melly Mellyanawaty, Rochim Bakti Cahyono, Hanifrahmawan Sudiby, and Wiratni Budhijanto	110003
Anaerobic treatment of palm oil mill effluent in batch reactor with digested biodiesel waste as starter and natural zeolite for microbial immobilization	Paulina Adina Hari Setyowati, Lenny Halim, Melly Mellyanawaty, Hanifrahmawan Sudiby, and Wiratni Budhijanto	110004
The effect of natural zeolite as microbial immobilization media in anaerobic digestion at various concentrations of palm oil mill effluent (POME)	Erika Dyah Ayu, Lenny Halim, Melly Mellyanawaty, Hanifrahmawan Sudiby, and Wiratni Budhijanto	110005
Dyes removal from textile wastewater using graphene based nanofiltration	I. G. B. N. Makertihartha, Z. Rizki, M. Zunita, and P. T. Dharmawijaya	110006
Assessment of start-up mechanisms for anaerobic fluidized bed reactor in series based on mathematical simulation	Hanifrahmawan Sudiby, Dody Guntama, and Wiratni Budhijanto	110007
Application of micro bubble generator as low cost and high efficient aerator for sustainable fresh water fish farming	Wiratni Budhijanto, Deen Darlianto, Yano Surya Pradana, and Muhamad Hartono	110008
Investigation the foam dynamics capacity of SDS in foam generator by affecting the presence of organic and inorganic contaminant	Bode Haryanto, Siswarni M. Z., Yosef C. H. Sianipar, Tongam M. A. Sinaga, and Imam Bestari	110009
Design of pyrolysis reactor for production of bio-oil and bio-char simultaneously	Andi Aladin, Ratna Surya Alwi, and Takdir Syarif	110010
Biogas production from pretreated coffee-pulp waste by mixture of cow dung and rumen fluid in co-digestion	Sri Rachmania Juliastuti, Tri Widjaja, Ali Altway, and Toto Iswanto	110011
Production of biomethane from palm oil mill effluent (POME) with fed batch system in beam-shaped digester	Martha Aznury, Jaksen M. Amin, Abu Hasan, and Astinesia Himmatuliza	110012
Acclimatization process of tofu wastewater on hybrid upflow anaerobic sludge blanket reactor using polyvinyl chloride rings as a growth medium	Nyimas Yanqoritha, Muhammad Turmuzi, and Derlini	110013

The influence of ozone on the photocatalytic degradation of phenol using TiO₂ photocatalyst supported by Bayah natural zeolite

Fatah Sulaiman, Denni Kartika Sari, and Indar Kustiningsih

110014

Treatment of oily bilge water by electrocoagulation process using aluminum electrodes

Soeprijanto, Adela Dea Perdani, Dennis Farina Nury, and Lily Pudjiastuti

110015

Preface: The 3rd International Seminar on Fundamental and Application of Chemical Engineering 2016 (ISFACHE 2016)

Fadlilatul Taufany,* Widiyastuti, and Siti Nurkhamidah

*Editors of ISFACHE 2016

Department of Chemical Engineering, Institut Teknologi Sepuluh Nopember (ITS),
Kampus ITS Sukolilo, Surabaya 60111, Indonesia
Address correspondence to f_taufany@chem-eng.its.ac.id

This proceedings volume contains selected articles from the “3rd International Seminar on Fundamental and Application of Chemical Engineering 2016” held in Sheraton Surabaya Hotel & Towers, Indonesia from November 1-2, 2016, that has been peer reviewed. This year marks the third ISFACHE seminar that we have been hosted since 2010, and we are honored to announce that this year we have numerous registered participants from 7 different countries participating in the seminar. The scope of this seminar was quite broad, in which 120 research articles within 10 research topic areas, namely Biochemical Engineering, Catalyst and Reaction Engineering, Waste Water Treatment Technology, Conventional and Renewable Energy, Nano Materials and Nanotechnologies, Modeling and Process System Engineering, Polymer Engineering and Material Processing, Thermodynamics, Separation and Transport Phenomena, and Food Technology, have been extensively discussed.

We must thank all the plenary, keynote, and invited speakers, as well as all the presenters and participants from the researchers, industries, and stakeholders for the excellent sharing knowledge in research experience and scientific information in the field of chemical engineering. There were intense and fruitful discussions after the talks and in the breaks, which created a pleasant and constructive atmosphere. We believe that the seminar has indeed contributed to establish networks for setting guidelines the roles of chemical engineering for progress in the sustainable development.

The incredibly persistent support from the Department of Chemical Engineering – Institut Teknologi Sepuluh Nopember, in coordination with the Badan Kejuruan Kimia Persatuan Insinyur Indonesia (BKKPII) and the Asosiasi Pendidikan Teknologi dan Kejuruan Indonesia (APTEKINDO), melded with the overwhelming enthusiasm of the seminar speakers, presenters, and participants, as well as all the resolute support of the seminar sponsors, *i.e.* PT. Pertamina, PT. Pupuk Indonesia, PT. Semen Indonesia, PT. Pembangunan Jawa Bali, PT. IPMOMI, PT. Pertamina Lubricants, PT. Petrokimia Gresik, PT. Pupuk Iskandar Muda, PT. Bank Mandiri, PT. Semen Tonasa, and PT. TJB Power Services, all have brought realization to the production of this proceedings volume.

We would like to thank again the speakers, presenters, participants, and sponsors, who were responsible for the success of the seminar, and look forward to the fourth edition of the ISFACHE seminar.

Production Of Biomethane From Palm Oil Mill Effluent (POME) With Fed Batch System In Beam-Shaped Digester

Martha Aznury^{1,a)}, Jaksen M. Amin¹, Abu Hasan¹, Astinesia Himmatuliza¹

¹*Department of Chemical Engineering, Politeknik Negeri Sriwijaya, Palembang
Jl. Srijaya Negara Bukit Besar, Palembang 30139, Indonesia*

^{a)}Email : martha_aznury@polsri.ac.id

Abstract. Palm oil mill effluent (POME) is the biggest liquid waste which is produced from palm oil production. POME are containing organic matter, high levels of biological oxygen demand (BOD) and chemical oxygen demand (COD) were 28000 mg/L and 48000 mg/L. To reduce the levels of pollution caused by POME, is necessary to do stages of processing using a biological process that involves aerobic and anaerobic bacteria so that it can be utilized as a new product that has economic value, one is biogas. The processing into biogas in anaerobic performed by fed batch system. In the ratio between POME and activated microorganismes are 70:30%. The process of anaerobic fermentation in fed batch is done by time variation of the addition of the substrate. The mixture of POME and activated microorganismes were fermented for a month and then after one month substrates were added gradually as much as 1 liter into the digester with a variety of additional time are 1, 2, and 5 days. The interval of addition of the substrate give effect to the pH and the quantity of biogas produced. The highest increasing of the quantity of biomethane was 25.14 mol% at the time the addition of substrate every fifth day.

1. INTRODUCTION

Palm oil mill effluent (POME) is the biggest waste which is produced from palm oil production. According Zahara (2014), in the palm oil industry, wastewater is produced from the process of sterilization and clarification in large quantities derived from steam and hot water used. Palm oil production requires large amounts of water. One tone of palm oil to produce assumption 3 tones of POME (Aznury, et. al., 2014). POME from palm oil industry generally has a high temperature range of 70-80°C, the color of dark chocolate, which contains dissolved solids such as colloidal and suspended oil residue. POME has a value of Biological Oxygen Demand (BOD) and Chemical Oxygen Demand (COD), which tend to be high. According Ibrahim, et al.,(2013), COD from POME 50,000 mg/L POME is discharged directly into the water, it can pollute the environment because it may cause turbidity and will produce a pungent smell that can damage aquatic ecosystems due to the breakdown of the old and tend to consume dissolved oxygen in large quantities. Before the effluent is discharged into the environment must first be given special treatment on the handling of waste that can be processed to conform to the quality standards of waste that has been set by the environmental agency.

POME is a nutrient-rich organic compounds and carbon, the decomposition of organic compounds produced by anaerobic bacteria can produce biogas (Deublein and Steinhauster, 2008). If the gases are not maintained and allowed to escape into the air, it can be one of the causes of global warming due to methane and carbon dioxide released is including greenhouse gases is touted as a source of global warming today. Emissions of methane is 21 times more harmful than CO₂ and methane is one of the largest contributors to greenhouse gases (Sumirat and Solehudin, 2009).

Palm oil industry was using open pond for sedimentation and fermentation for reducing of organic materials in POME. The ponds were only a temporary shelter before finally disposed in bank of the river. Although only a temporary shelter is processing naturally remains the case, but the process is not optimal. To reduce the levels of pollution caused by POME, that it is necessary to stages of processing using a biological process that involves aerobic and anaerobic bacteria so that it can be utilized as a new product that has economic value. POME generated from the three-stage process, namely sedimentation, fermentation, and collection stages.

Anaerobic process is a process of breakdown of organic materials by the activity of methanogenic bacteria and bacterial asidogenic. The bacteria are usually found on organic waste such as animal manure and organic waste. POME waste that has been mixed with activator and then fermented for approximately 1 to 2 months on biogas production.

Research conducted by Saputri (2015) by using a batch fermentation shows the percentage volume of each variation starter produce biogas quantity varies in every condition, so it can be concluded that giving the number of starter greatly affect the percentage of the quantity of biogas itself. The greater number of starter, the more gas is produced.

Based on this, the authors conducted a study of POME treatment process by fed batch fermentation. Fermentation system is fed batch fermentation by means of new media to add regularly on a closed culture, without removing the existing culture fluid in the fermenter so that increase of culture volume (Widjaja, et. al., 2010). In fed batch fermentation the addition of medium that are expected to generate a higher yield than a batch system.

Research objectives in the purpose of this study include: Analyzing the effect of the turn of the feed to the quantity of biogas generated in the fed batch. To analyze the effect of fermentation time on biogas formation in fed batch system.

2. METHODOLOGY/ EXPERIMENTAL

2.1 Materials

Raw materials is palm oil mill effluent (POME) from PT. Mitra Ogan. Tbk, whereas for activator microorganism from cow manure obtained from slaughter houses in Gandus area, as well as the chemicals used are available in the laboratory of Chemical Engineering Department of the Polytechnic of Sriwijaya.

2.2 Biogas Formation Process

The main research was done by mixing between POME and active microbial. Material was added to the digester for 1 month. After 1 month, feed POME in the effect of time were 1 day, 2 days, and 5 days. Then, accommodate the gas produced in the gas sampling bags for further analyzes biogas, as shown in Figure. 1

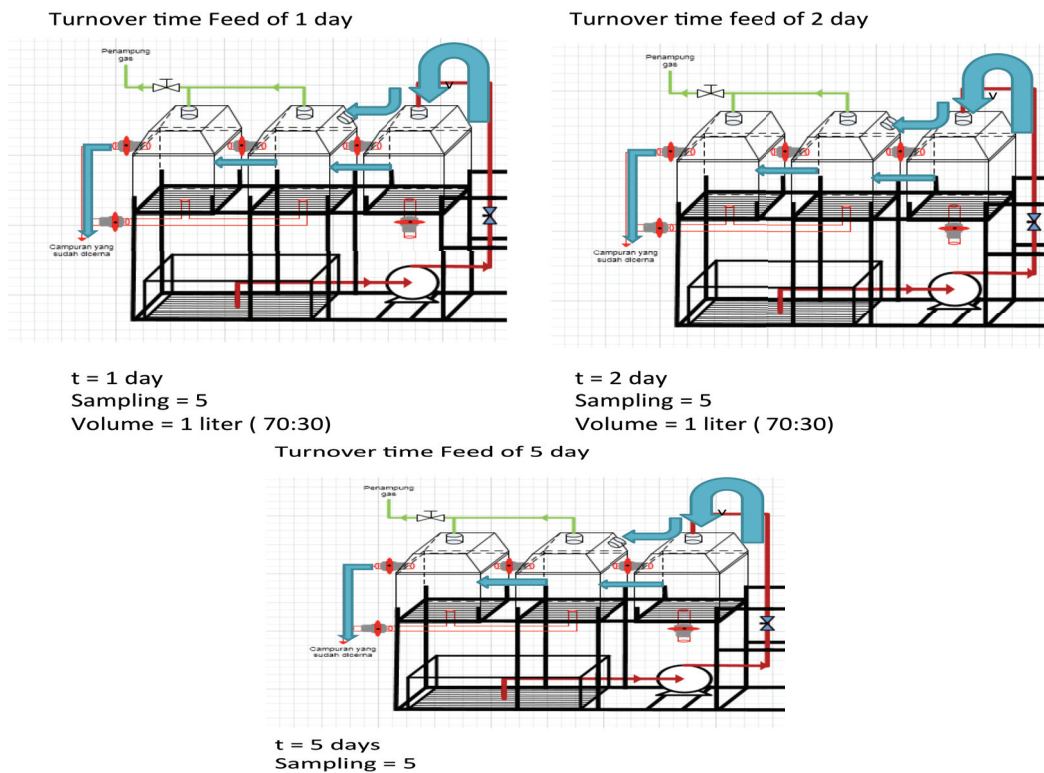


Figure.1. Processing of POME on Biogas Production

2.3 Analytical Analysis

All the tests for the samples were analyzed according to the guidelines of the American Public Health Association (APHA, 1995) for the examination of POME and POME after fermentation. Biogas yield was measured with a wet gas meter (W-NK-O.SA, Shinagawa). Gas samples were obtained through an inverted funnel placed above baffles near the top of the reactor. Biogas composition was determined using a gas chromatograph (GC-8A, Shimadzu, Kyoto)

3. RESULTS

3.1 The Effect of Time on Each Day of Feed POME on CH₄ Production

Study of POME to production of CH₄ was metabolite process by anaerobic microorganisms. Figure 2 shown the effect of time on each day of feed POME on methane (CH₄) production.

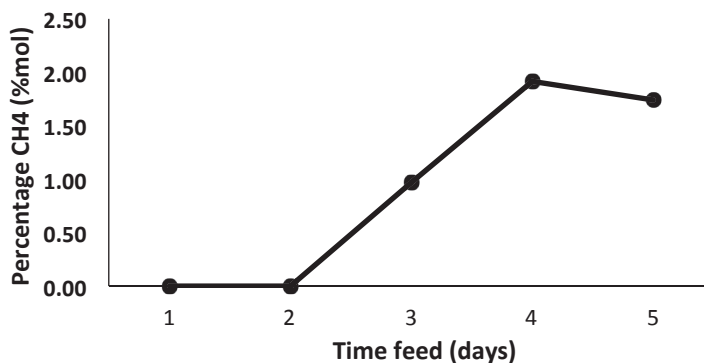


Figure 2. The Effect of Time on Each Day of Feed POME on CH₄ Production.

Figure 2 shown it could be observed the effect of the time change of the percentage of the resulting feed. The percentage of methane gas continued to increase during the 30 days of fermentation. According Mujdalipah, dkk., (2014), fermentation time gives a real difference to gas production, which directly affect the fermentation production of biogas. Effect of fermentation on biogas production was due to the content of POME which contains a lot of protein and fat and takes several days to undergo hydrolysis stage. At this stage coenzyme hydrolysis and anaerobic bacteria require several days to decipher carbohydrates, proteins and fats into monomers such as amino acids and glucose.

POME was in a batch fermented for 30 days. Then for the next day, the turn of the substrate into the digester is done regularly every day for a feedbatch fermentation. The percentage of methane gas formed decline may be caused by imbalances in the anaerobic process. The imbalance caused by excessive hydraulic load. This condition occurred when the residence time in anaerobic to shorter change than the growth rate of bacteria. In this condition occurs excessive accumulation of organic material that causes bacteria can not break down organic compounds, so that the reform process will be disrupted anaerobic feeding of microorganisms in every day into the digester provides less than optimal results in the production of biogas.

Microorganisms were that require time to adjust to the environment with high fat concentration. The imbalance is also caused by toxic materials that already exist in the biomass or compounds produced during anaerobic fermentation process. Fermentation can be slow if the biomass contains high concentrations of fat because fat can be degraded into toxic compounds, namely long-chain fatty acids (Mahajoeno, 2008). The value of pH was 7 went to decreased to 6. The high concentration of acetate may inhibit overhaul (Mahajoeno 2008). At the time of the initial fermentation, acid-forming bacteria produce acids quickly so can cause rapid pH decline anyway. The acid formation will produce acetic acid, H₂, and volatit fatty acid (VFAs), such as butyric acid and propionic acid. When the pH value is low, then the microorganisms will be in a state in-active so that it can affect the rate of formation of biogas, particularly the methanogenic bacteria.

3.2 The Effect of Time on Two Days of Feed POME on CH₄ Production

The percentage of methane generated during the one-day change of bait still little therefore be varied when the turn feeds into two days to determine the effect the time change feed ratio and the percentage of methane produced. Effect of time for POME feed on the percentage of methane (CH₄) is shown in Figure 3.

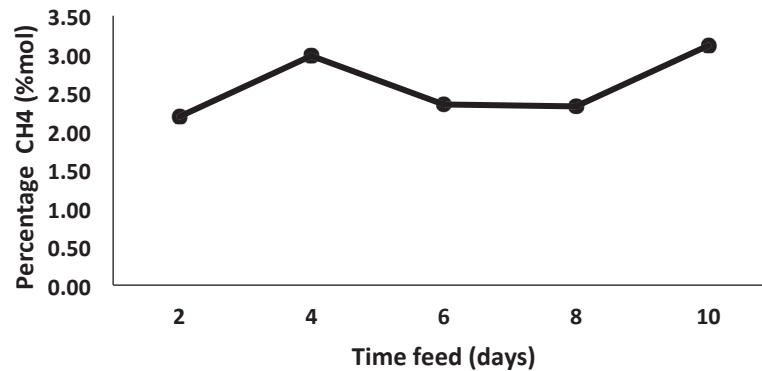


Figure 3. Effect of Time for POME Feed Every Two Days on CH₄ Production.

Figure 3 shown the percentage of methane (CH₄) produced during the two days of feeding. Gas methane formed ranges between 0-1% in feed every two days, while in turn feeds two days increased to 2-3%. It can be observed from the chart above the levels of the element N₂ and O₂ in the product produced is very high. According to Sumirat and Solehudin (2009) many of its elements N₂ and O₂ can influence the process of the formation of compounds of methane in the biogas as an anaerobic bacteria decomposition so that if there is oxygen in the fermentation process, it will cause bacteria decomposition could not work properly thus inhibiting the process of formation of methane. The conditions were within the digester also be taken to ensure there was no contamination of the air entering during an anaerobic process. Anaerobic bacteria can work well to break down organic material into methane.

There was a decrease drastic pH is from 8 to 6. Decrease pH value indicates an interruption of feed of materials in the fermentation process into the digester too much, so the production of acid will be plentiful. This condition causes the microbes are not able to degrade too much acid into methane. A decrease in pH was indicate of the acidification process. According to Aznury et al. (2014), acidification in POME shown hydrolisis to acidic process into volatile fatty acids (VFAs) like as propionate and butyrate. At this stage of methanogenesis, methane forming bacteria will consume VFAs so that alkalinity increases that result in the increase in the pH to achieve a stable pH (Gerardi, 2003).

3.3. The Effect of Time on Five Days of Feed POME on CH₄ Production

The percentage of methane generated during the one-day and two-day addition of the substrate is still little therefore varied of time to 5 days to determine on methane (CH₄) production is shown in Figure 4.

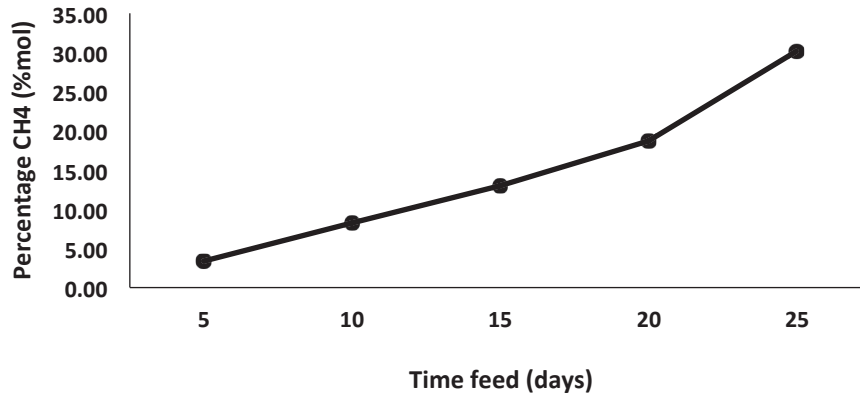


Figure 4. The Effect of Time on Five Days of Feed POME on CH₄ Production

In Figure 4 shown be observed that in five days of POME feed in increased amounts of methane as much as 3-25%, while the levels of oxygen and liquid nitrogen decreased in POME. POME have contains a number of components of high fat and thus take time to hydrolysis of activator that are difficult degraded, such as cellulose and lignin, it takes a long time to be hydrolyzed in the first phase.

If both are used as inputs it takes to stay longer so that these materials can be hydrolyzed. According to research conducted Hasanah (2011), the amount of fat in 39.43 ppm and hydrolysis of the protein and fat needed a few days to POME not been recast effective for methane formation stage has not yet happened. Methane production need to undergo several stages of the hydrolysis, acetogenesis, asedogenesis, and methanogenesis. From the graph it can be concluded that the quantity of biogas produced is influenced by the fermentation time and environmental conditions around the digester. The longer the fermentation time, the more the production of biogas produced. Fermentation time is directly related to the amount of time it takes to pass through the stages of formation of methane is hydrolysis, asetogenesis, asedogenesis, and methanogenesis.

Conditions within the digester also be taken to ensure there was no contamination of the air entering during an anaerobic process. Anaerobic bacteria can work well to break down organic material into methane. The pH value of the five-day addition of the substrate is at a score of 7. The pH value is good in producing biogas between 7. A pH below 6.5 the activity of methanogenic bacteria will decrease and a pH of less than 5, the fermentation activity will stop (Yani and Darwis, 1990)

4. DISCUSSION

POME that has undergone a process of sedimentation in adding with activator microorganisms and passed on to the next II tank fermented for one month and then once a month flowed into the tank III for fed batch process systems. The percentage of gas produced by batch and fed batch system is presented in Figure 5.

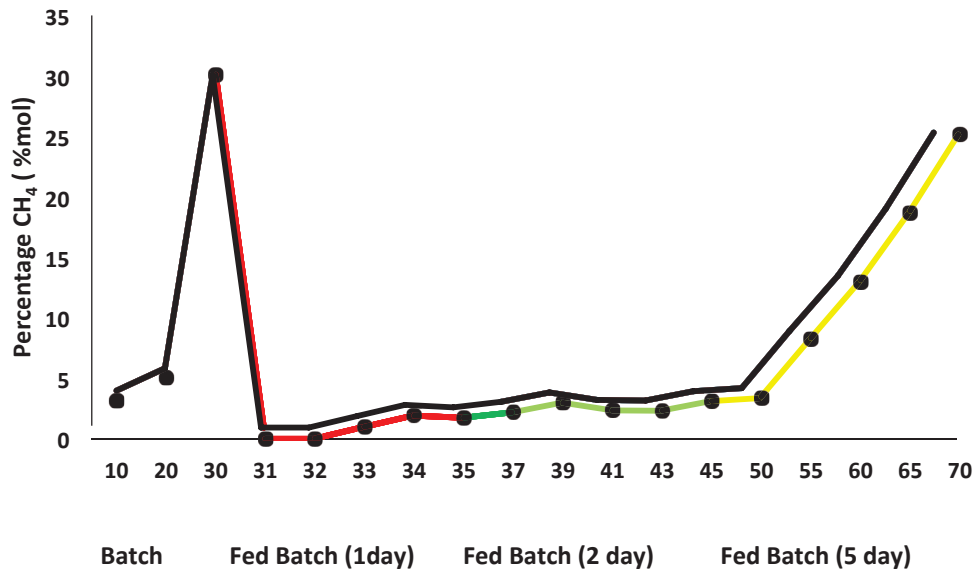


Figure 5. Percentage CH₄ by batch and fed batch fermentation

Time	fermentation
0 -30 days ;	batch
31-34 days;	feed batch (1 day)
35-44 days;	feed batch (2 day for run)
45-70 days;	feed batch (5 day for run)

In Figure 5 shown it can be observed biogas production for one month fermentation increased. In the first 10 days the amount of methane produced is still small, as well as 20 days of fermentation the amount of gas produced is still small. But at 30 days of fermentation the amount of gas produced more. The methane gas generated increased from day to day. In the first 10 days of methane produced is still in small quantities ie 3.1372% mol while on the second day of methane produced is still in small quantities ie 5.0478 mol%. The anaerobic bacteria require a long time to break down organic matter derived from POME. POME has a high fat content so it takes a long time to hydrolyze while activator contains a number of components that are difficult degraded, such as cellulose and lignin, it takes a long time to be hydrolyzed in the first phase.

POME and activator as inputs require a longer residence time so that these materials can be hydrolyzed. At this stage eoenzym hydrolysis and anaerobic bacteria require several days to decipher carbohydrates, proteins, and fats into monomers such as amino acids and glucose. So the longer the fermentation time, the time it takes the bacteria for longer mendegradasi organic substances and thus affect the production of biogas (Wulansari, 2015). Research conducted by Saputri (2015) using the batch system to produce biogas with a small quantity because the relatively short fermentation time is 4 days. At this time only reached the stage in which the hydrolysis of organic materials such as carbohydrates fats and proteins will be overhauled by bacteria into amino acid and acetic acid. Comparison between batch and fedbatch system is presented in Table 1.

Table 1. Comparison of Batch and Fed Batch System

System	Volume Starter: POME (%)	Fermentation time (day)	CH ₄ (%mol)	Reference
<i>Batch</i>	30 : 70	4	7.3546	Saputri, 2015
<i>Fed Batch</i>	30 : 70	40	30.0951	This research, 2016

After 1 month of batch fermentation, methane levels rose, but after the turn of the feed quantity of methane is lowered. Methane forming bacteria re-adjusted to the environment when the addition of the substrate for the bait as a food source to regenerate (turnover). Substitution every single day did not have a significant influence on the percentage of methane produced. Cellulolytic bacteria or hydrolytic will only work remodel polymer complex at the stage of hydrolysis. Substitution every five days were able to increase the quantity of biogas produced. In contrast to the turn of the substrate every day, changing every 5 days will give you a longer time in the stage methane production. Phase of acidogenesis an advanced stage of hydrolysis stage. Pyruvic and butyric acid is the result of an overhaul of volatile fatty acids (VFAs). Propionic acid is oxidised by bacteria *Syntrophobacter wolinii* into products used by methanogenic bacteria in the formation of methane gas (Weismann, 1991).

5.CONCLUSION

From the research that has been the execution of POME into biogas with fed batch system, it can be concluded:

1. Of the three variations of the replacement feed time were 1, 2 and 5 days showed that the replacement time feedback effect on the percentage of methane produced. It can be observed in Percent of methane produced where the amount generated is directly proportional to the length of time the turn feeds.
2. The percentage of methane obtained were 0, 0.9729, 1.9160, 1.7433 mole% CH₄, approximately for the replacement of the feed every time one day. Feeding of POME for every 2 days were 2.1853, 2.9824, 2.3501, 2.3208, 3.1130 mole% CH₄, approximately. Effect of feeding POME for 5 day inside of bioreactor were 3.3651, 8.2054, 12.9596, 18.6627, and 25.1453 mole% CH₄, approximately.

ACKNOWLEDGMENTS

The authors would like to acknowledge the financial suport of **Penelitian Stategis Nasional**, Directorate General of Higher Education provides funding research project grants **NOMOR SPPK : 189/SP211/LT/DRPM/III/2016**, Date: 7 Desember 2015, entitled **Rancang Alat Biodigester Untuk Pengolahan Air Limbah Industri Minyak Kelapa Sawit Untuk Memproduksi Biometan Dan Pupuk**. Also, authors acknowledge for PT. Perkebunan Mitra Ogan was a suport of POME.

REFERENCES

1. American Public Health Association (APHA). (1995), *Standard Methods for the examination of Water and Wastewater*, 19th Ed. Washington, D.C.
2. Aznury M., A. Trianto, A. Pancoro, and T. Setiadi, (2014) *Production of Polyhydroxyalkanoate (PHA) from Palm Oil Mill Effluent (POME)*, Proceedings International Oil Palm Conference, Bali, 17-19 June
3. Deublein, D. and Steinhauser, A. (2008), *Biogas from Waste and Renewabe Resources*, Berlin: WILEY-VCH Verlag GmbH & Co. KGaA, Weinheim
4. Ibrahim A.L, Dahlan I., Adlan M.N., dan Dasti A. F. (2013): *Characterization of palm oil mill effluent: a comparative study*, Caspian Journal of Applied Sciences Research, 2, 262-268
5. Gerardi, M.H. (2003) *The Microbiology of Anaerobic Digesters*. John Wiley dan Sons. Inc., New Jersey.
6. Mahajoeno E. (2008), *Pengembangan Energi Terbarukan dari Limbah Cair Pabrik Minyak Kelapa Sawit [disertasi]*, Bogor:Program Studi Pengelolaan Sumberdaya Alam dan Lingkungan, Institut Pertanian Bogor
7. Mujdalipah, Siti, S. Dohong, A. Suryani, and A.Fitria, (2014), *Pengaruh Waktu Fermentasi terhadap Produksi Biogas Menggunakan Digester Dua Tahap pada Berbagai Konsentrasi Palm Oil Mill Effluent dan Lumpur Aktif*. Skripsi. Program Studi Pendidikan Teknologi Agroindustri, Universitas Pendidikan Indonesia. Bandung.
8. Saputri, Hardina Apri, (2015), *Pengaruh Persentase Volume Starter Dan Waktu Fermentasi Pada POME Terhadap Kuantitas Biogas Menggunakan Digester Balok Sistem Batch*. Laporan Akhir. Jurusan Teknik Kimia. Politeknik Negeri Sriwijaya. Palembang
9. Sumirat and Solehudin, (2009). Nitrous Oksida (N₂O) dan Metana (CH₄) sebagai Gas Rumah Kaca. Vol. 7, No. 2, Hal. 24-98.
10. Weismann U., (1991). *Anaerobic Treatment of Industrial Wastewater*. Berlin: Institut fur Verhahrens technik.

11. Widjaja, Tri., Hariani, Natalia, Gunawan, Setio, and Darmawan, (2010), Teknologi Immobilisasi Sel Ca-Alginat Untuk Memproduksi Etanol Secara Fermentasi Kontinyu dengan *Zymonas mobilis Termutasi*, Laboratorium Teknologi Biokimia Jurusan Teknik Kimia, Fakultas Teknologi Industri Institut Teknologi Sepuluh November, Surabaya.
12. Wulansari, Fitria, (2015), Pengaruh Perbandingan Persentase Volume Starter dalam Pemanfaatan POME Menjadi Biogas pada Digester Limas Terpancung Secara Batch. Laporan Akhir. Jurusan Teknik Kimia. Politeknik Negeri Sriwijaya. Palembang
13. Yani M, and Darwis AA., (1990), Diktat Teknologi Biogas, Bogor: Pusat Antar Universitas Bioteknologi-IPB.
14. Zahara, Intan. (2014), Pengaruh Pengadukan terhadap Produksi Biogas pada Proses Metanogenesis Berbahan Baku Limbah Cair Kelapa Sawit. Skripsi. Jurusan Teknik Kimia, Universitas Sumatera Utara, Sumatera Utara

Certificate



The 3rd INTERNATIONAL SEMINAR ON FUNDAMENTAL AND APPLICATION OF CHEMICAL ENGINEERING (ISFAChe) 2016
"The Future Chemical Engineering for Sustainable Development"

MARTHA AZNURY
as
Presenter

Conference Organized by
Department of Chemical Engineering
Faculty of Industrial Technology
Sepuluh Nopember Institute of Technology



Juwari, ST., M.Eng., Ph.D
NIP. 197306151999031003

In Collaboration with
APTEKINDO and BKK-PII
*November 1 - 2, 2016, Surabaya,
East Java, Indonesia*



Chairman of ISFAChe 2016
Fadlilatul Taufany, ST., Ph.D
NIP. 198107132005011001