


Item No. KR06071

KYL-210 433Mhz 57600bps RS232 w/ antenna A1

TECHNICAL SPECIFICATIONS

KYL-210 Wireless Data Module

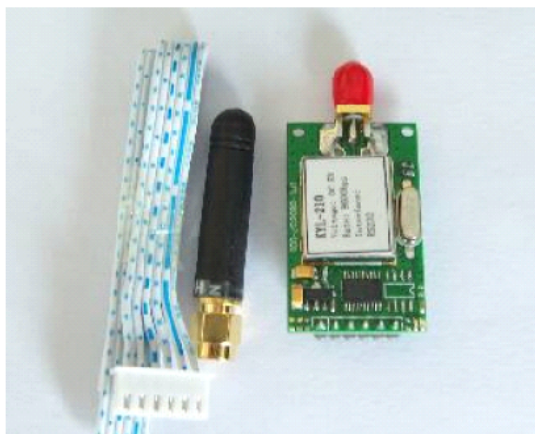

KYL-210 is a kind of micro power wireless transceiver data module. With small size, low power consumption as well as good stability and reliability, it is widely used in remote control, industry automation, wireless telemetry and so on. This module can be connected with micro-controller, PC, RS485 equipments and other devices with UART port directly.

I. Technical specification

PERFORMANCE	
Power Output:	50mW
RF Line-of-sight Range:	400m@1200bps; 200m@9600bps
RF Effective Rate:	1200/2400/4800/9600/19200/100kbps
Space Channel:	1MHz(Default), (12.5/25KHz/other customization)
Bandwidth:	<25KHz
Receiver Sensitivity:	-118dBm@1200bps (1% BER)
NETWORKING	
Networking Topology:	Point-to-point, point-to-multipoint
COMPATIBILITY	
KYL-220	
POWER	
Supply Voltage:	3.1~5.5V DC
Transmit Current:	<40mA
Receive Current:	<20mA
Sleep current:	<20uA

Item No. KR06071

KYL-210 433Mhz 57600bps RS232 w/ antenna A1

TECHNICAL SPECIFICATIONS


GENERAL	
Communication Mode:	Half-duplex
Frequency Band:	433MHz default (400MHz-470MHz available)
Channel:	8(default),16/32/64(optional)
Interface:	TTL, RS232, RS485
PHYSICAL PROPERTIES	
Size:	40mm×24mm×6mm (excluding antenna base and data pin)
Weight:	20g
Antenna Base:	50Ω, SMA
Operating Temperature:	commercial: -30℃~+60℃(TCXO)
Frequency Stability:	±2.5ppm

II. Application Field

- * AMR (Automatic Meter Reading)
- * Wireless alarm and security systems
- * Building automation, wireless monitoring , Access Control System;
- * Wireless data transmission, automatic data collection system;
- * Wireless POS, PDA wireless smart terminal;
- * Wireless PTZ remote control, LED display;
- * Wireless remote control, wireless process control;
- * Industry automation, wireless telemetry and so on.

.....

III. How to Use It

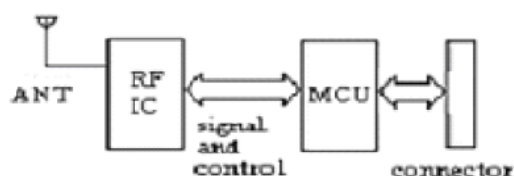

KYL-210 Principle map

1. Default 5V Power supply
2. PIN Definition (6pin)


Item No. KR06071

KYL-210 433Mhz 57600bps RS232 w/ antenna A1


TECHNICAL SPECIFICATIONS

Pin No.	Pin Name	Description	Level	Connection with terminal	Remarks
1	GND	Grounding of power supply			
2	VCC	Power supply DC	+3.3-5.5V		
3	RS232 TXD	Data transmitting	RS232	RXD	Red LED flashes when transmitting
	TTL TXD	Data receiving	TTL		
	RS485 A	RS485 A	-		
4	RS232 RXD	Data receiving	RS232	TXD	Green LED flashes when receiving
	TTL RXD	Data receiving	TTL		
	RS485 B	RS485 B	-		
5	DGND	Digital grounding			NC
6	NC	Factory testing			NC

3. The connection schematic between computer and the RF module

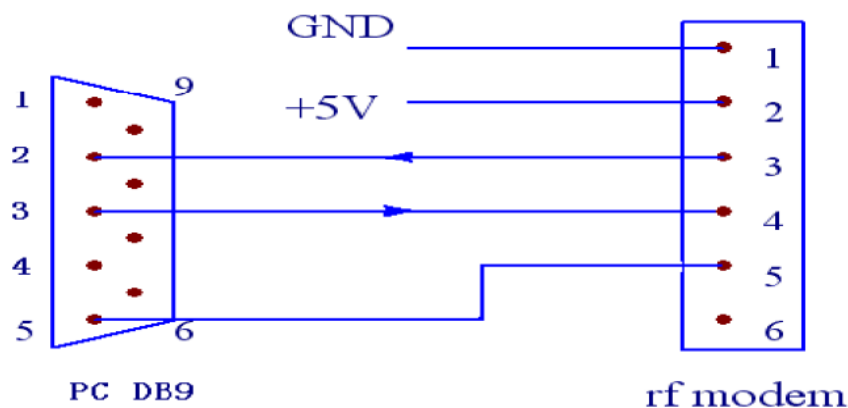

4. Installation dimension:

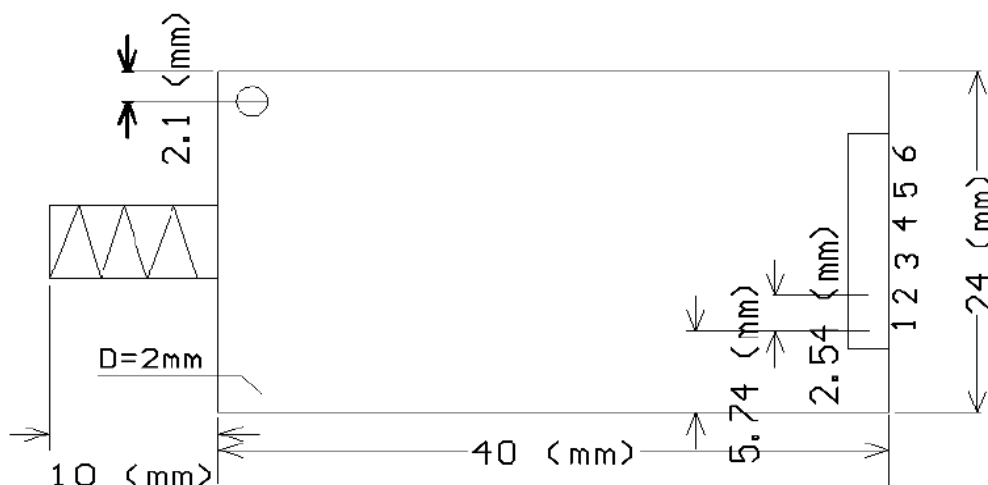

Item No. KR06071

KYL-210 433Mhz 57600bps RS232 w/ antenna A1

TECHNICAL SPECIFICATIONS

5. The Function-indicator light

- The LED indicator blinks red for 0.5S when power on.
- The LED indicator blinks red continually while transmitting data.
- The LED indicator blinks green continually while receiving data.
- The LED indicator keeps dark when the module is in sleep mode.

6. Parameter setting by our software

You can use our software KYLCOM.exe to read or set the parameter on computer. When you connect RF module to PC by the testing cable, please remember to connect the DB9 as well as USB port to computer.

Corresponding frequency points of 1-8 channel at 433MHz :

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	425.250MHz	2	426.250MHz	3	427.250MHz	4	431.250MHz
5	432.250MHz	6	434.250MHz	7	435.250MHz	8	436.250MHz

7. About antenna

We usually allocate KYL-210 RF module with the following antenna. If you have any special needs about the antenna, please specify. You are welcomed to visit our web for more choice about the antenna



Standard package: KYL-210 module+ A1 antenna+L0 6-PIN cable

Questions & more information :

www.klinikrobot.com

Phone : +62-818-0609-5359

@ sandy@klinikrobot.com

I: About KYL-210

KYL-210, the high speed rate transceiver data module is used as the wireless data transceiver in short-ranges, with the small size, weight and power consumption and good stability and reliability. Narrowband low power UHF wireless data transmitters and receivers with channel spacing as low as 25 KHz.

II: Features:

I. Features of KYL-210

1. Low power transmission with 50mW.
2. With 433MHz as factory default carrier frequency, but 400-470MHz, 868MHz, 915MHz is available if needed.
3. High anti- interference and Low BER (Bit error Rate)
Based on the Gaussian Frequency Shift Keying (GFSK) modulation, the high-efficiency forward error correction channel encoding technology is used to enhance data's resistance to both transient interference and random interference and the actual bit error rate of $10^{-5} \sim 10^{-6}$ can be achieved when channel bit error rate is 10^{-2} .
4. Long Transmission Distance
Within the visible range, when the height of antenna is higher than 2m and The Bit Error Rate (BER) is 10^{-3} , the reliable transmission distances respectively is 400m @1200bps, and is 200m@9600bps.
5. Transparent data transmission
Transparent data interface used in transceivers is for meeting many standard or nonstandard user protocols. Any false data generated in air can be filtrated automatically (What has been received is exactly what has been transmitted).
6. Multi-channels
KYL-210 transceivers offer 8 channels, if needed, 16 or 32 channels are available to satisfy various configuration of communication under user's demand at the same time.
7. 2 ports with three connection methods
KYL-210 transceivers provide 2 ports with three connections, ports: a UART interface of TTL level, a non-standard RS-232 port and a non-standard RS-485 port.
8. Big data buffer area
With optional interface baud rate: 1200/4800/9600/19200bps and 8N1/8E1/8O1 data format (set by user), the transceiver can transmit unlimited data frames with flexible user program.
Note: the RF data rate is only settled down before delivery, please inform our sales when placing your orders.

9. Intelligent data control and no any extra programs required

Even for half duplex communication, no any excessive programs required. All RF system data transmission/reception and other On-the-Fly conversion and control are performed by KYL-210 transceivers automatically.

10. Lower power consumption & Sleep function

With +5V power, the receiving current is less than 20mA, the transmitting current is less than 40mA, and the sleeping current is less than 20uA.

11. High reliability, small and light

By using monolithic radio-frequency integrated circuit and single-chip MCU, the transceivers have less peripheral circuit s, high reliability, and low failure rate.

12. More options of configurable antennas for user different applications.

13. Watchdog monitor

Watchdog monitors the inner function, so it can change the traditional product structure and also improve the reliability of our modules.

III: Application of KYL-210:


KYL-210 the micro power wireless transceiver data module is suitable for:

- * AMR Automatic Meter Reading
- * Wireless alarm and security systems
- * Building automation, security, wireless monitoring and control of room equipment, Access Control System;
- * Wireless data transmission, automatic data collection system;
- * Radio modem can be used for Sports training & competition;
- * Wireless dishes ordering;
- * Wireless POS, PDA wireless smart terminal;
- * RF modem can be used for Electronic bus station and intelligent traffic;
- * RF transmitter Wireless electronic display screen and queuing machine;
- * Wireless telemetry Charging for parking, parking lot;
- * Wireless modem Automobile inspection and four-wheel orientation;
- * Wireless sensor Industrial wireless remote control and air conditioning remote controller;
- * Data communication used for railway, oil field, dock and army.
- * LED display in thruway and public places
- * Point to multi-point wireless network, wireless on-the-spot bus and automatic data collection system;

IV: How to use the KYL-210

KYL-210 provide RS-232, RS-485 and UART/TTL level interface port for direct connection with PC, RS485 devices, monolithic processors and other UART components kinds of applications. The schematic diagram is shown below:

Item No. KR06071
 KYL-210 433Mhz 57600bps RS232 w/ antenna A1
 USER MANUAL

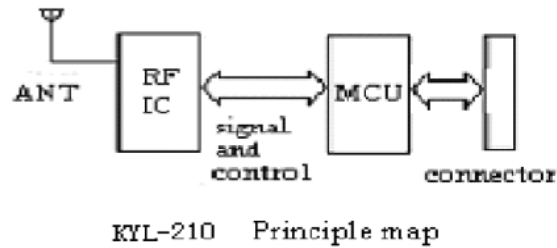

1. Power supply

The factory default setting is +5V(3.3-3.6V will inform when placing the order).By using better ripple factor, KYL-210 transceivers can also share power supply with other equipment. If possible, a voltage-stabilizing chip with 5V voltage is more recommended as the only power supply than Switch power supply. But if only switch power supply available, the jam by switch pulse to the transceivers should be avoided. In addition, the reliable grounding must be used if there is other device in the system equipment. In case of failing to connect with the ground, it can form its own grounding but must be absolutely separated from the municipal electric supply.


2. Connection Definition with terminal

KYL-210 transceivers supply one 9-pin connector (JP1), their definitions and connection methods with terminals are shown in Table 1.

Table 1: JP1 Pin Definitions and connection methods

Pin No.	Signal Name	Function	I/O	Level	Remarks
1	GND	Grounding of power supply	-	-	
2	Vcc	Power supply DC	-	3.1~5.5V	Other power supply need customized
3	RS232 TXD	Data Transmission	O(output)	RS232	Choose one of the three interface ports
	TTL TXD	Data Transmission	O(output)	TTL	
	RS485 A	RS485 A	IO	-	
4	RS232 RXD	Data Receiving	I(input)	RS232	Choose one of the three interface ports
	TTL RXD	Data Receiving	I(input)	TTL	
	RS485 B	RS485 B	IO	-	
5	DGND	Signal Ground	-	-	
6	NC	-	-	-	

3. The connection schematic diagram between computer and our RF module

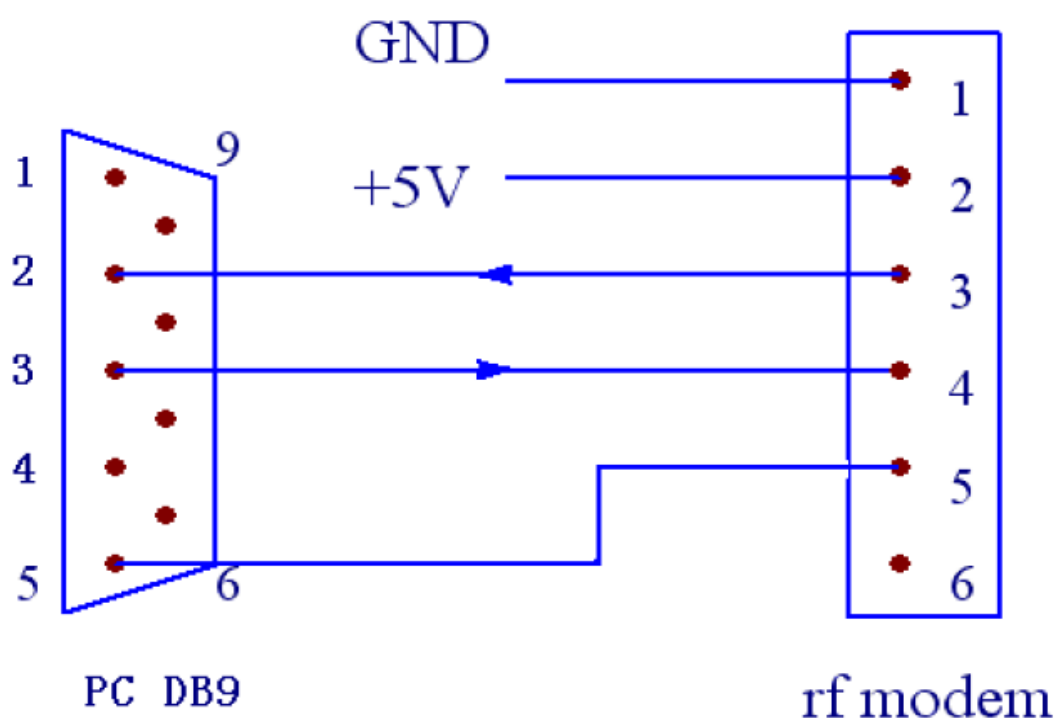

4. Setting of channel, interface, and data format

Before using KYL-210, the user needs to make simple configuration based on its own needs to determine the channel, interface mode and data format. The user can change or view the module's interface baud rate, channel and address code.

Parameter setting or reading as per the testing software KYLCOM.exe in the PC (in products box). And the configuration is as follows:

i. Channel configuration:

Channel No.	Frequency	Channel No.	Frequency
1	429.0325MHZ	5	433.0325MHZ
2	430.0325MHZ	6	434.0325MHZ
3	431.0325MHZ	7	435.0325MHZ
4	432.0325MHZ	8	436.0325MHZ


Note: the frequency points corresponding to each channel can be adjusted based on the user's needs.

ii. The schematic diagram of setting the parameter as follows:

- Connect the PC and module with RS232 data cable.
- Open the "KYLCOM" PC software, select "English" as follows:




- c. Click “open port”, then will open a small window as the following picture, clients will write the parameters in this windows.

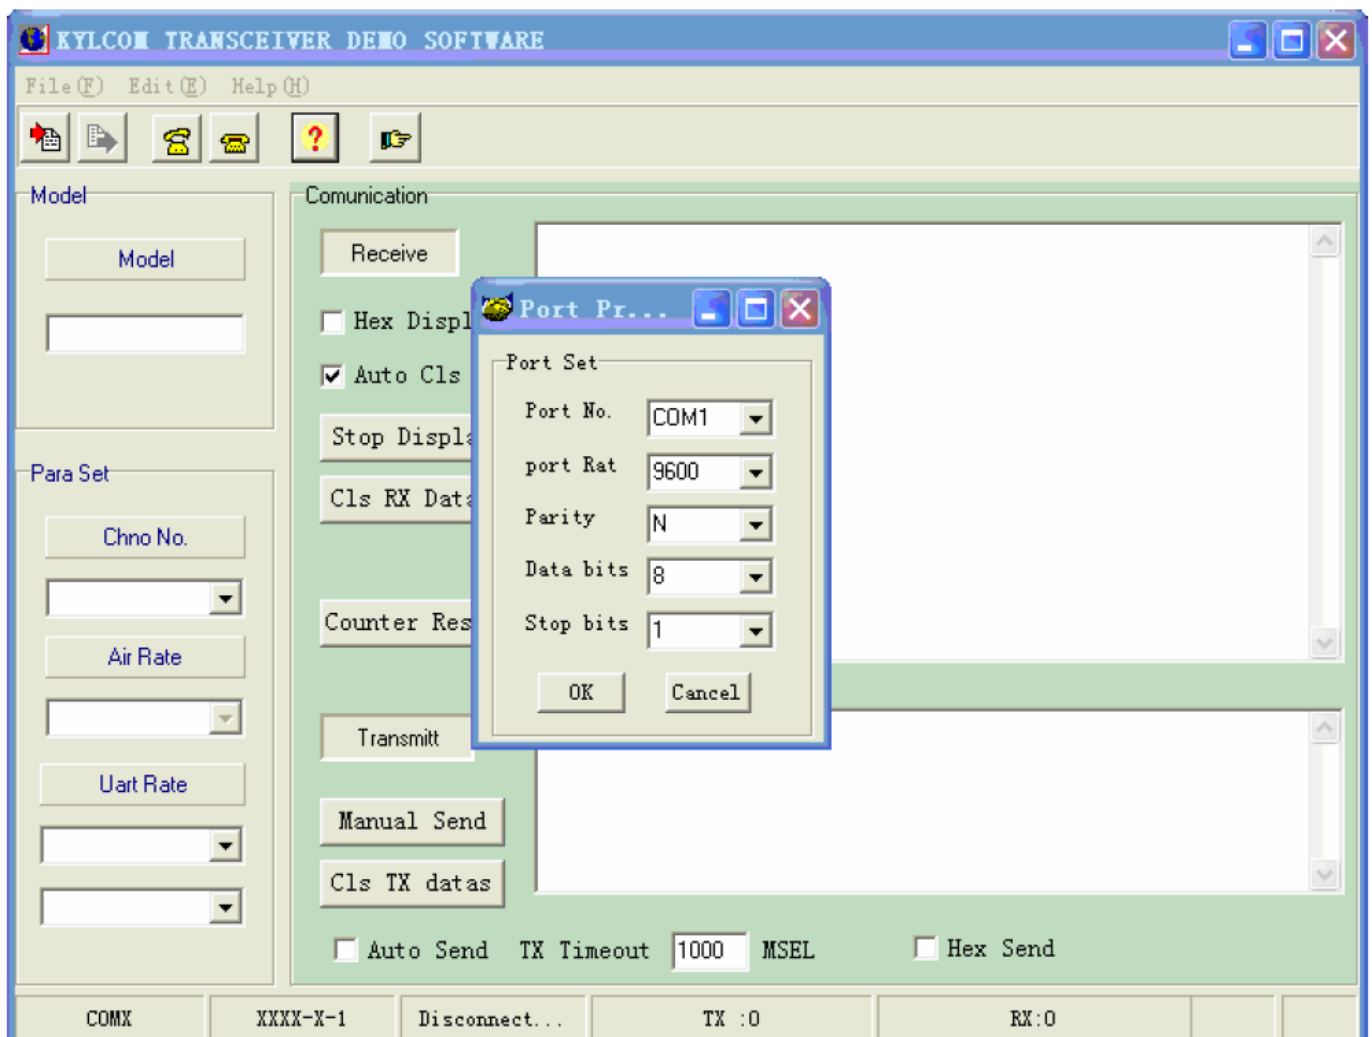

- d. Click “read paras”.

“Read correct” show your connection between KYL module and PC is correct.

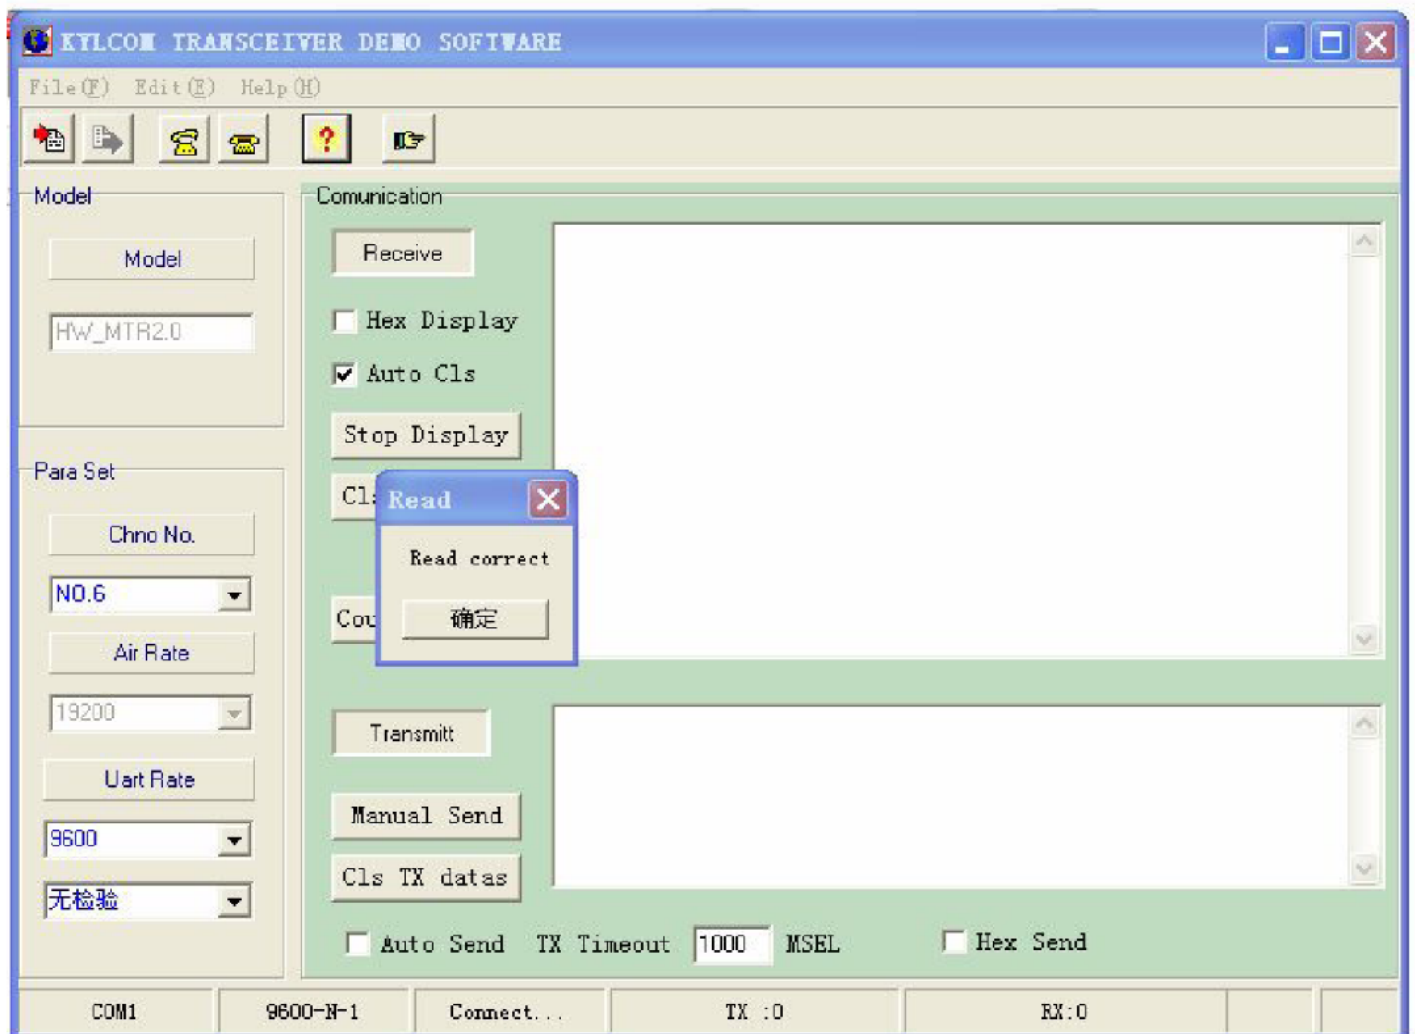


If you want to change some technical parameter, you need do as follows.

- e. User can change the parameter such as channel and interface rate and Parity mode according to actual demand through the button of the left window. After writing the parameters in the left catalogue, click the “write para”, then will show “write correct”. So you have finished the process for changing technical parameter.

Item No. KR06071


KYL-210 433Mhz 57600bps RS232 w/ antenna A1

USER MANUAL

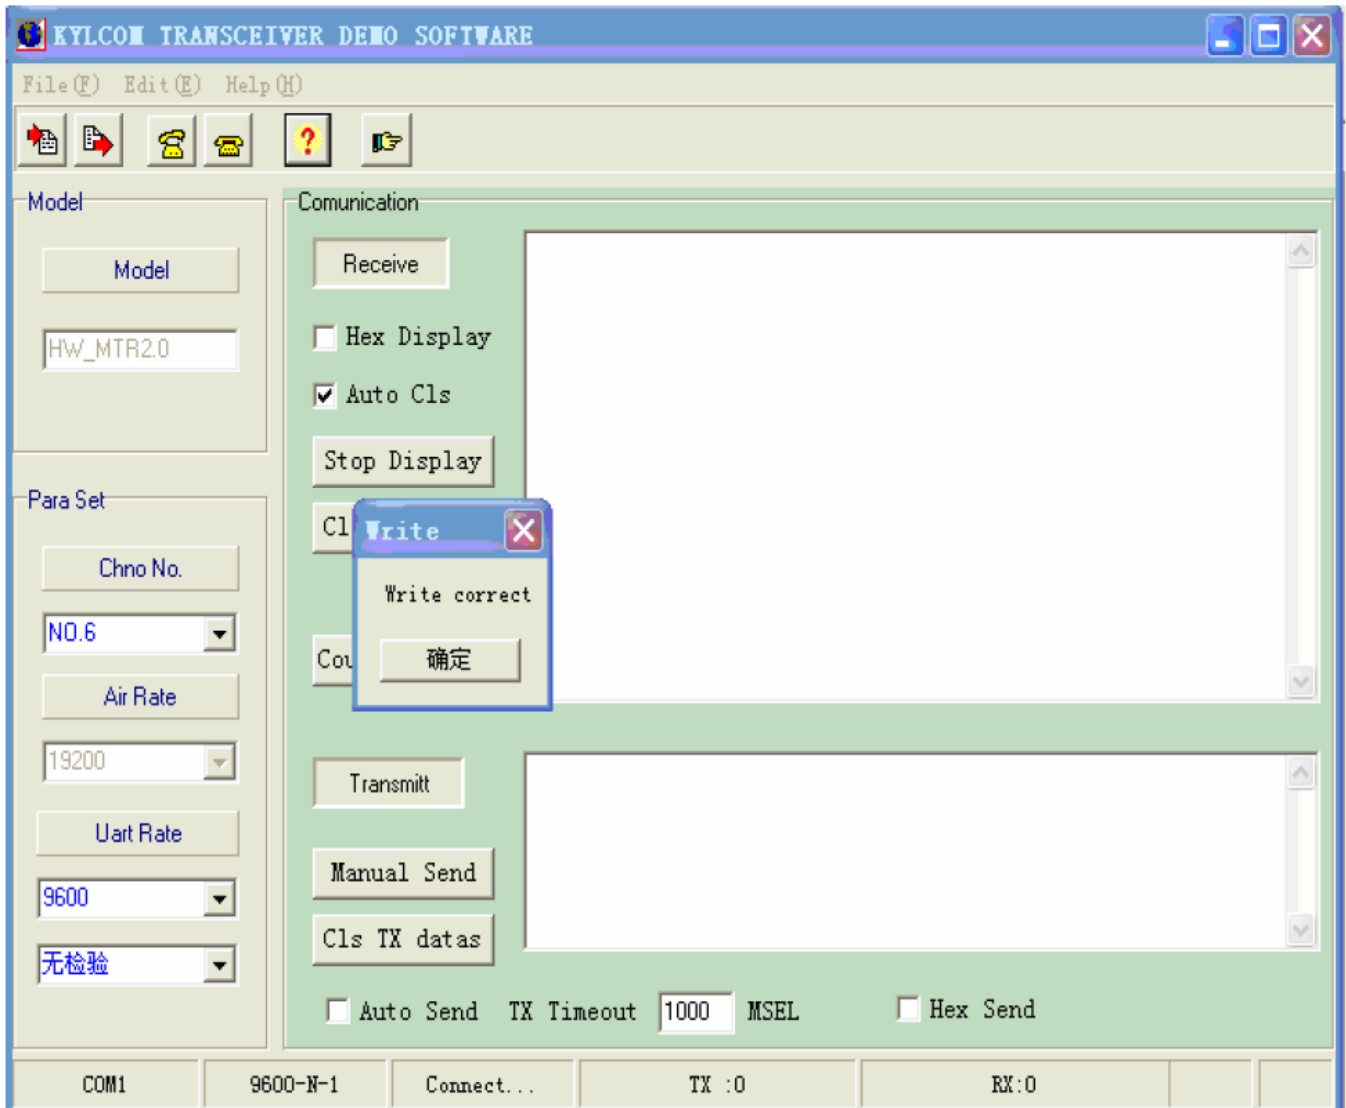

Note: The RF data rate(Air Rate) can not be set by user, it is confirmed when placing orders and set before delivery. So please confirm the RF data rate when placing the order.

5. Installation dimension:

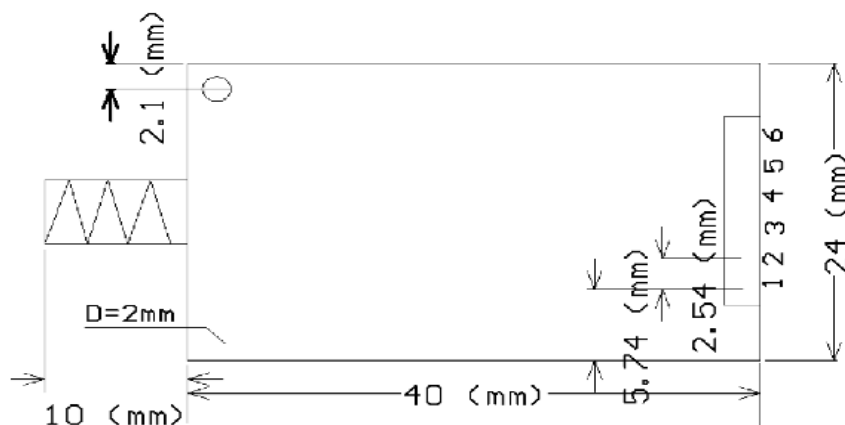

6. The Function-indicator light

- The LED indicator light will glitter red for 0.5S once after switched on.
- The LED indicator light will glitter green continually while receiving data from air.
- The LED indicator light will glitter red continuously when transmitting data into air after receiving from COM.
- If the module enables the sleep function, LED indicator light is always dark.

7. Supported protocol and Transmit capability


KYL-210 standard transceivers offer transparent protocol to support various applications and protocols of users. If the user needs to decrease his cost or ease the workload of terminal CPU, we can add other specific functions based on the transparent protocol, such as addressing, data acquisition, command interpretation, etc.

8. The attentions of data transmission

- The delay time (t_c) of conversion between transmitting and receiving is less than 1ms.

Timing diagram:

KYL SERIES

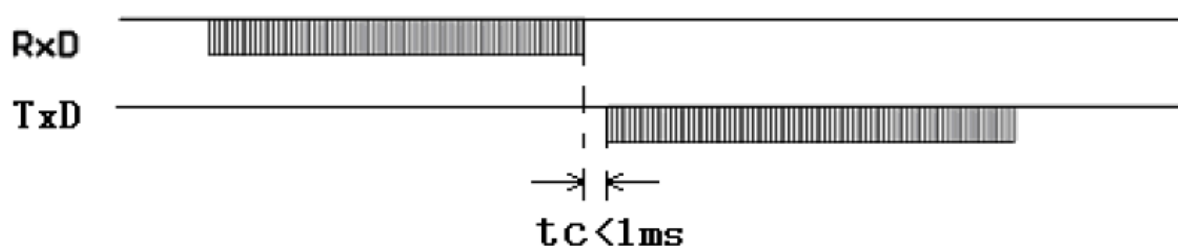

b. The delay time of transceivers between the first bit sent by TxD to the first bit received by RxD.

Due to a data processing will be made on user's data by KYL-210 transceiver using FEC (Forward Error Correction) or other correction algorithm, when RxD of a KYL-210 transceiver 'A' receives the data, then transmits it, the other one transceiver 'B' will have a delay (t_s) to receive and transmit by TxD. Different RF data rate causes different delay time. Please see the specific delay time below:

RF Date Rate (bps)	Delay T_s (mS)	RF Date Rate (bps)	Delay T_s (mS)
1200	90	9600	16
2400	48	19200	10
4800	30		

Timing diagram:

KYL Series

(A)

RxD


KYL Series

(B)

TxD

t_s

t_s

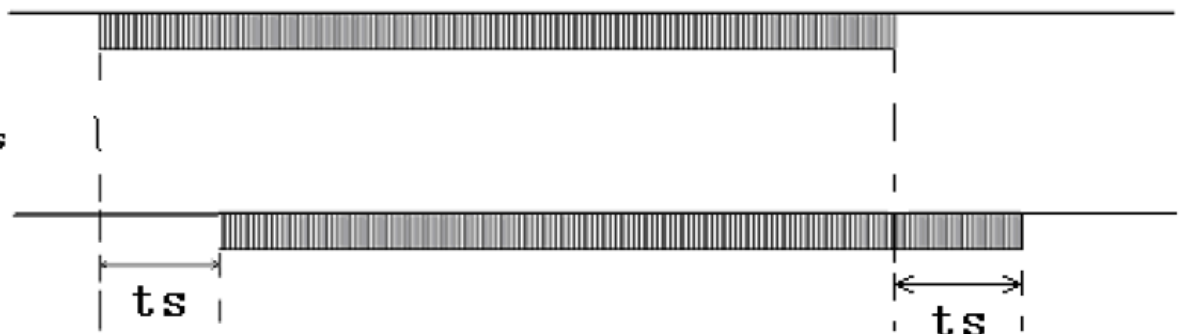

c. Error dealing procedure:

To enhance the reliability and stability of user's systems, a verify bit or a Cyclic Redundancy Check (CRC) mode is highly recommended to resent the wrong information while using KYL-210 modules.

d. Large-number data transmission

In theory, when the interface data rate is faster than the RF data rate, KYL-210 transceivers can sent unlimited-long data package, but any long packages more than 120B are not recommended. The length of each package should be between 60~100B. We also recommend user to resent the wrong information using Automatic Error Request Equipment (ARQ).

The analyzing as below:

What if the actual transmission BER (Bit Error Rate) is 10^{-4} , 1 packet with 1KB data, which is about 10-thousand bits, is sent, theoretically, at least 1 bit will be received wrongly, then the 1KB information will never be received correctly.

But if we package the data into 10 packets with 100B for each, when all 10 packets are sent, there will be only 1 packet wrong according to this probability. After that, resend this wrong packet using ARQ mode. So by resending one more packet and the efficiency rate is reduced 10%, all data will be absolutely received correctly.

10. Antenna configuration:

Many appropriate antennas for low power RF modules are selected for meeting different user antenna configurations. Please ask our Sales office for further information about the antenna's dimension and performance.

a. Helical SMA antennas

KYL-ANT-433-10-SMA: 100mm helical SMA antennas with high gain and low cost, reach a long distance.



KYL-ANT-433-3-SMA: 28mm SMA helical antenna with magnetic core, small size, beautiful appearance (like the mobile phone antenna)



KYL-ANT-433-10-ZSMA: 100mm SMA helical antenna with folding joint, easy for adjusting the direction and fixing.



b. Magnetic vehicle antenna

KYL-ANT-O433S-300H1.5-SMA: include magnetic antenna base, suitable for equipment with metal shell, easy for fixing, effective to enhance the transmission distance.

