



PROCEEDING

GRADUATE SCHOOL OF UNIVERSITAS SRIWIJAYA
THE 1ST SRIWIJAYA INTERNATIONAL CONFERENCE
ON ENVIRONMENTAL ISSUES
(1ST SRICOENV 2018)

September
26-27, 2018

Horison Ultima Hotel,
Palembang, Indonesia



our partners :



YAYASAN
Belantara



Conference name : The 1st Sriwijaya International Conference on Environmental Issues
Venue : Hotel Horison Ultima Palembang, South Sumatera, Indonesia
Date : September 26-27th, 2018

Group Picture



Chairman : Hermansyah, PhD
Universitas Sriwijaya, Indonesia

Advisory Committee:

Bunyamin Tar'an (University of Saskatchewan, Canada)
Rashid Mehmood (Ottawa Hospital Research Institute, Canada)
Tsukasa Inaoka (Departemen of Human Ecology, Saga University, Japan)
Anis Saggaff (Universitas Sriwijaya, Indonesia)
Zainuddin Nawawi (Universitas Sriwijaya, Indonesia)

Steering Committee:

Nurul Huda (Universiti Sultan Zainal Abidin, Kuala Trengganu, Malaysia)
Suryo Purwono (Universitas Gajah Mada, Indonesia)
Prodono (Institut Teknologi Bandung, Indonesia)
Nimmi Zulbainarni (Institut Pertanian Bogor, Indonesia)
Ratna Juwita (Universitas Indonesia, Indonesia)
Fakhili Gulo (Universitas Sriwijaya, Indonesia)
Iskhaq Iskandar (Universitas Sriwijaya, Indonesia)
Aldes Lesbani (Universitas Sriwijaya, Indonesia)
Siti Nurmaini (Universitas Sriwijaya, Indonesia)
Benyamin Lakitan (Universitas Sriwijaya, Indonesia)
Rujito A. Suwingnyo (Universitas Sriwijaya, Indonesia)
M.T. Kamaluddin (Universitas Sriwijaya, Indonesia)

REVIEWER/EDITOR

Mohamad Amin (Universitas Sriwijaya, Indonesia)
Fakhili Gulo (Universitas Sriwijaya, Indonesia)
Iskhaq Iskandar (Universitas Sriwijaya, Indonesia)
Benyamin Lakitan (Universitas Sriwijaya, Indonesia)
M. T. Kamaluddin (Universitas Sriwijaya, Indonesia)
Isni Andriana (Universitas Sriwijaya, Indonesia)
Yuliana (Universitas Sriwijaya, Indonesia)
Henny Fitriani (Universitas Sriwijaya, Indonesia)
Siti Nurmaini (Universitas Sriwijaya, Indonesia)
Aldes Lesbani (Universitas Sriwijaya, Indonesia)
Eddy Ibrahim (Universitas Sriwijaya, Indonesia)
Nurhayati (Universitas Sriwijaya, Indonesia)
Nengyanti (Universitas Sriwijaya, Indonesia)
Rico Januar (Universitas Sriwijaya, Indonesia)
Dessy Adriani (Universitas Sriwijaya, Indonesia)
Indah Widiastuti (Universitas Sriwijaya, Indonesia)
Merynda Indriyani Syafutri (Universitas Sriwijaya, Indonesia)
Sofia Sandi (Universitas Sriwijaya, Indonesia)
Dade Jubaedah (Universitas Sriwijaya, Indonesia)
Herpandi (Universitas Sriwijaya, Indonesia)
Tengku Zia Ulqodry (Universitas Sriwijaya, Indonesia)
Puspitahati (Universitas Sriwijaya, Indonesia)
Afnur Imsya (Universitas Sriwijaya, Indonesia)
Rizky Tirta Adiguna (Universitas Sriwijaya, Indonesia)
Yulisman (Universitas Sriwijaya, Indonesia)
Eli Sahara (Universitas Sriwijaya, Indonesia)
Diah Kusuma Pratiwi (Universitas Sriwijaya, Indonesia)
Laila Hanum (Universitas Sriwijaya, Indonesia)
Rizky Palupi (Universitas Sriwijaya, Indonesia)
Marini Wijayanti (Universitas Sriwijaya, Indonesia)
Rozirwan (Universitas Sriwijaya, Indonesia)
Liliana (Universitas Sriwijaya, Indonesia)
Novrikasari (Universitas Sriwijaya, Indonesia)
M. Bakri (Universitas Sriwijaya, Indonesia)
Fitri Maya Puspita (Universitas Sriwijaya, Indonesia)
Ridho Zulfahmi (Universitas Sriwijaya, Indonesia)

THE KEYNOTE SPEAKERS

1. Prof. Juahir Hafizan (Universiti Sultan Zainal Abidin, Kuala Trengganu, Malaysia)
2. Prof. Jatna Supriatna. Ph.D. (Universitas Indonesia)
3. Prof. Dr. Philipp Wiedemann (Mainhaim University)
4. Prof. Dr. Ir. Fachrurrozie Sjarkowie, M.Sc. PhD (Universitas Sriwijaya)
5. Dr. Duong Van Thao (Thai Nguyen University of Agriculture and Forestry)
6. Assoc.Prof. Dr. Khalida Muda (Universiti Teknologi Malaysia)

Preface

Environmental issues such as climate change or global warming is the greatest universal problem over the world. How we respond to this crisis will greatly impact both current and future generations.

The 1st Sriwijaya International Conference on Environmental Issues has been held to provide a vehicle the state of the art in research results and trends environmental and climate change topics, to offer interaction, discussion and possible collaboration among researchers in the future. This conference was held on September 26-27th, 2018 in Hotel Ultima Horison Palembang, South Sumatera, Indonesia hosted by Graduate School of Universitas Sriwijaya, Indonesia with co-organizer and Thai Nguyen University of Agriculture and Forestry Vietnam and Universiti Sultan Zainal Abidin Malaysia as Co-organizer. Participants of this conference was a combination of academics/researchers, development practitioners, community/civil society representatives, and national and local government units and non-government organizations.

This conference consists of 6 keynotes speakers from Germany, Malaysia, Vietnam and Indonesia, and 94 selected participants as oral presenters. For the selected articles will be published in Environment, Energy and Earth Sciences (E3S) Web of Conferences (Scopus and Thomson Reuters- indexed proceeding). Keynotes and participants presented topics related to following topics: 1) Promoting Environment System ; 2) Strengthening People-Environment Inter-Relationship; 3) Reducing Global Warming Effect; 4) Mitigation and Adaptation in Climate Change in Wetland. This conference was a great opportunity not only for sharing knowledge and experience in environmental research, but also for starting a long and fruitful cooperation and friendship among participants.



Hermansyah, PhD
Chair personman of the 1st Sricoenvironment.

Extraction of Uranium from Artificial Liquid Waste using Continuous Flow Emulsion Liquid Membrane Technique

Rusdianasari^{1,*}, Yohandri Bow², Tresna Dewi³, and Eka Sri Yusmartini⁴

¹Chemical Engineering Department, Renewable Energy Engineering, Politeknik Negeri Sriwijaya, Palembang, Indonesia

²Chemical Engineering Department, Energy Engineering, Politeknik Negeri Sriwijaya, Palembang, Indonesia

³Electrical Engineering Department, Politeknik Negeri Sriwijaya, Palembang, Indonesia

⁴Chemical Engineering Department, Universitas Muhammadiyah, Palembang, Indonesia

Abstract. The continuous extraction of uranium from artificial wastewater by an emulsion liquid membrane containing di-2-ethylhexylphosphoric acid (D2EHPA) and tri-n-butyl phosphate (TBP) as the carrier was carried out using one stage mixer-settler. The optimum condition gave the ratio of emulsion velocity to the feed velocity 1:4 and steady state reached after five minutes. The optimum condition was obtained at the 90.91 % of uranium recovered from raffinate, using EDTA as the masking agent with concentration $5 \times 10^{-2} \text{M}$. The total concentration of carrier was 3% with ratio D2EHPA and TBP 3:1. The emulsion liquid membrane has high relative selectivity after steady state with separation factors were U_{Ni} 115.43 and U_{Fe} 328.55. The result of the experiment showed that emulsion liquid membrane containing D2EHPA and TBP as the carrier have good performance for the continuous system.

1 Introduction

The separation, purification, and enrichment of chemical elements present in the mixture is an important issue faced by many chemical and nuclear industries in recent years. Likewise, ways of handling chemicals with high levels of impurities such as nuclear industry waste are a matter of urgency. For example in the handling of uranium waste which is one of several radionuclides commonly found in wastewater from processing facilities or use of nuclear material and active substances. To reduce the risk and not harm human beings and the environment requires proper management and segregation.

The liquid membrane is a liquid phase which separates (barrier) two other liquid phases that are not mixed with the membrane phase. The liquid membrane may consist of a hydrophobic liquid phase that divides the two liquid phases hydrophilic or hydrophilic phase which bisects the hydrophobic phase. The two liquid phases separated by liquid membrane each are called the external phase (feed / continuous) and the internal phase. The two liquid phases separated by liquid membrane each are called the external phase (feed /

*Corresponding author: rusdianasari@polsri.ac.id

continuous) and the internal phase. The external phase contains a substance to be separated, while the internal phase is the receiving phase of the substance after passing through the liquid membrane [1,3].

The separation process by emulsion liquid membrane technique has two important stages. The first stage is the formation of the emulsion and the second stage is the separation/extraction. The emulsion that had been made dispersed into the feed / external phase by stirring. Therefore the emulsion grains used should be stable and not cracked during the stirring process. To maintain the stability of the emulsion during the process, and then into the membrane (surfactants) that normally work to reduce tension between the droplets of dispersed phase and feed phase [4,6].

In the separation process, uranium metal ions react with the carrier substance (extractant) on the surface of the membrane phase interface and the feed phase, forming a metal complex dissolved in an organic phase. The complexing agent that has released uranium metal ions is moving back to the surface of the organic phase to form a complex with uranium metal ions. This process is continuous so that most of the metal ions move from the feed phase and enrichment in the feed phase [7,9].

The equipment used for the continuous extraction process are divided into two types, they are mixers and columns. Mixer-settler is a composition comprising of two tank units consisting of mixing units and mixed phase shelters used for continuous processing. The two phases of the emulsion phase and the feed phase are fed into the mixer unit, and after stirring, the mixture is passed to the settler unit [10,11].

$$\alpha_{U,Ni} = \frac{X_{U(o)} / X_{Ni(o)}}{X_{U(aq)} / X_{Ni(aq)}} \quad (1)$$

2 Materials and Methods

The materials used are uranyl nitrate hexahydrate, di-2-Ethylhexyl phosphate, tributyl phosphate, sorbitan monooleate (Span-80), kerosene, nitric acid, phosphoric acid, arsenazo III, nickel nitrate and iron nitrate. Substances used in this study have a quality p.a (pro analysis).

The equipments used are a set of Fisher Dyna-Mix stirrer, UV-Vis Spectrophotometer, pH meter, peristaltic pump, analytical balance, stopwatch and commonly used glassware.

2.1 Optimization of Parameters on the Batch System

In this study, D2EHPA and TBP were tested as a carrier for the recovery of uranium metal ions by continuous flow extraction. Parameters to be tested to obtain optimum conditions for making membranes in batch are listed in Table 1.


Table 1. Optimization of parameters in the manufacture of the membranes

No.	Parameter	Variation
1.	Surfactant concentration (Span-80) (%)	1, 2, 3, 4, 5, 6
2.	Comparison of D2EHPA and TBP	1:0; 1:1; 2:1; 3:1; 1:0; 1:2; 1:3
3.	Total concentration of carrier (%)	1, 2, 3, 4, 5, 6
4.	Time of emulsion preparation (min)	2.5; 5.0; 7.5; 10.0; 12.5
5.	Stirring speed of emulsion preparation (rpm)	2900, 3300, 3500, 3900, 4500, 5000
6.	Comparison $V_{Fi} : V_{Fo}$	1:1; 1:2; 1:3; 1:4; 1:5
7.	Receiver phase concentration(H_3PO_4) (M)	0.25; 0.50; 0.75; 1.00; 1.25; 1.50
8.	Residence time (min)	0; 5; 10; 15; 20
9.	HNO_3 concentration in feed phase (M)	0.25; 0.50; 0.75; 1.00; 1.25
10.	Concentrations of uranium solution (ppm)	50, 100, 150, 200, 250
11.	Comparison $V_{Fe} : V_{Feks}$	1:4; 1:5; 1:6; 1:7; 1:8
12.	Extraction time (min)	5; 7.5; 10; 12.5; 15; 17.5; 20; 25
13.	Stirring speed of extraction (rpm)	400, 500, 550

After parameter optimization is obtained, the parameters are used to recover uranium metal ions with continuous flow emulsion liquid membrane.

2.2 Equipment Design

The laboratory scale mixer-settler extraction apparatus consists of a mixer tank with two baffles and a settler tank made of glass. The inner diameter of the tank is 7.0 cm and the height is 14.0 cm. The agitating tank is connected to the feed phase and emulsion phase in which the emulsion and emulsion phases are flowed at a particular rate. Schematic equipment in figure 1.

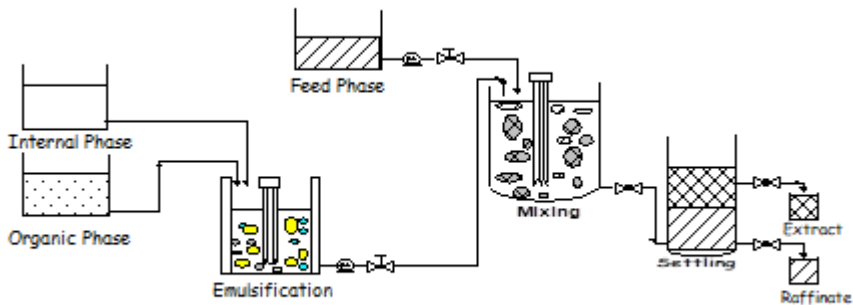**Fig. 1.** Schematic of continuous extraction equipment

2.3 Effect of Feed Flow Rate Flow

The effect of changes in the feed phase flow rate is determined by varying the feed phase flow rate of 20; 24; 30; 60; and 80 mL/min and other parameters are fixed at the predetermined optimum value.

2.4 Determining Steady Time

Steady time is the time the emulsion is dispersed in the feed phase so that the amount of uranium is extracted constant every time. For this determination the separations of the contact time variations as follows: 2, 4, 6, 8, 10, 12 minutes and other parameters are fixed at the predetermined optimum value.

2.5 Uranium Extraction from Artificial Liquid Waste

The artificial wastes are prepared with the following composition: uranium 100 ppm, Ni 410 ppm, and Fe 9392 ppm. This artificially prepared waste is used as the feed phase. The uranium concentration in the feed and raffinate phases was determined using a UV-Vis Spectrophotometer at a wavelength of 652 nm with a reactant forming the Arsenazo III complex, forming a blue complex. The calculation is done by using the calibration curve that has been made before. The concentrations of Ni and Fe in artificial and raffinate wastes were determined using AAS Shimadzu model AA 630-12. Ni is measured at 232 nm wavelength, and Fe is measured at 248.3 nm wavelength.

3 Results And Discussions

3.1 Optimization of Parameters on the Batch System

Optimization of parameters on the batch system taken at the extraction percentage reaches a minimum of 90% can be seen in Table 2.

Table 2. Optimization of parameters for making membranes

No.	Parameter	Optimization Results
1.	Surfactant concentration (Span-80) (%)	4
2.	Ratio of D2EHPA and TBP	3:1
3.	Total concentration of substance carrier (%)	3
4.	Time of emulsion making (min)	5
5.	Speed of stirring of emulsion making (rpm)	3900
6.	Ratio of $V_{Fi} : V_{Fo}$	1:1
7.	Phase concentration of the receiver (H_3PO_4) (M)	1
8.	Residence Time (min)	10
9.	Concentration of HNO_3 in the feed phase (M)	0.5
10.	Concentration of uranium solution (ppm)	100
11.	Ratio of $V_{Fe} : V_{Feks}$	1:4
12.	Extraction time (min)	5
13.	Speed of extraction stirring (rpm)	500

The optimum parameter (optimum condition) was applied to continuous extraction.

3.2 Effect of Speed of Feed Phase Flow

The effect of speed of feed phase flow to uranium concentration (U(VI)) in raffinate was shown in Figure 2. The increase in the flow speed of the feed phase causes the decrease of U(VI) concentration in raffinate. A higher flow speed increase will not increase the excessive percentage of extraction, and this was presumably due to reduced time stay in the

reactor so that U(VI) in the solution cannot be in contact with the emulsion maximally and the emulsion load was increasing so that its ability become reduced.

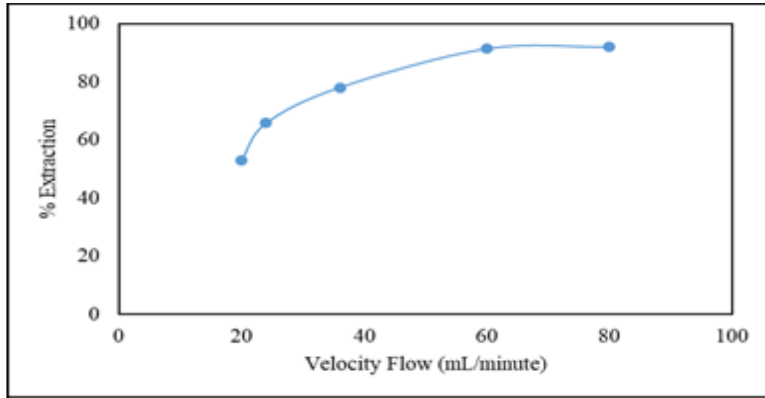


Fig. 2. Effect of Speed of Feed Phase Flow

3.3 Determination of Steady Time

The operation of a continuous process was done in a state of steady. The steady-state stated that shows the composition (concentration) U (VI) in raffinate constant to time. The state of steady was observed by measuring the concentrations of raffinate that exit every time interval certain.

In this experiment had observed steady time on the ratio of speed emulsion phase flow to feed of 1: 4. Figure 3 shows the state of separation process stages achieved after a 5 minute walk time. The state of steady is affected by the concentration of U (VI) in the feed phase because at different concentrations (up) the load of the liquid membrane to transfer U (VI) to the receiving phase will increase. The state of steady was obtained at a concentration of U (VI) 100 ppm.

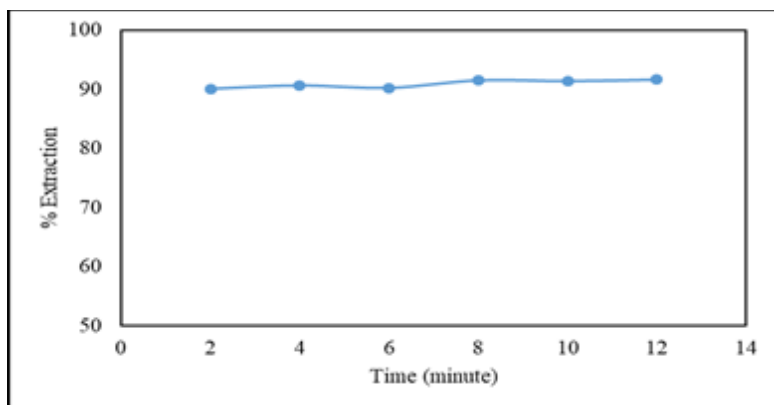


Fig. 3. Chart of SteadyTime

3.4 Separation of Uranium from Artificial Waste

The result of the separation of U (VI) from artificial liquid waste was measured by raffinate that had been separated from the emulsion phase. The results of the separation were shown in Figure. 3. From the figure, it was shown that U (VI) could be separated well from the 5th-minute percent of U (VI) extraction had reached above 85%.

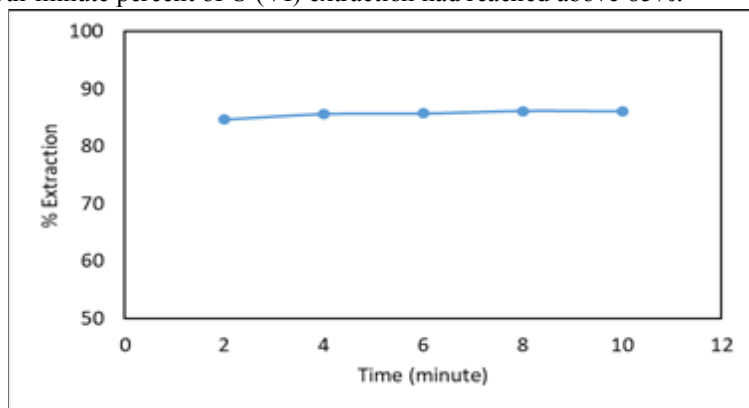


Fig. 4. Graph of separation U (VI) from artificial waste

The results of the separation through raffinate measurements gave an average percent extraction rate of 90.91% after steady time.

3.5 Separation Factors

The separation of the three ions depends on the effectiveness of the complex forming on the outer surface of the membrane/phase membrane and the difference in the rate of diffusion of the two complexes within the membrane. It was suspected that the formation of U (VI) complexes with carrier substances was more effective than other metal ions so that U (IV) could be transported more rapidly.

Despite the transport of Ni (II) and Fe (III) ions from the feed phase through the membrane phase, the relative transport did not affect the U (VI) extraction process in the waste. When viewed from the separation factor, the combined carrier might separate U (VI) by >1 . The mean separation factor price obtained after the steady time on the artificial waste was U, Ni = 115.43 and U, Fe = 328.55.

4 Conclusion

The extraction continuous U (VI) from artificial waste with the emulsion liquid membrane can be carried out in the mixer-settler. It had been found that speed the ratio of the feed phase flow and emulsion phase was 4: 1, where speed the feed phase flow rate was 60 mL/min and speed the emulsion phase flow is 15 mL/min, the steady time reached by the fifth minute of raffinate release..

Measurement of the separation results through raffinate provided extraction percent of 90.91%. This indicates that the continuous flow of fluid emulsion membrane with substances of D2EHPA and TBP combined carrier had a good performance. The substances

combined carrier D2EHPA and TBP had relatively good selectivity with the average separation factor values obtained after the steady time on the waste is U, Ni = 115.43 dan U, Fe = 328.55.

References

1. Saarangi, K., Indusekhar, V.K.. *Journal Research and Industry* **52** (1993)
2. Bartsch, R.A., WAY, J.D. American Chemical Society. America (1996)
3. Hayworth, H.C., Burn, W.A. *Journal Separation Science and Technology*. **18**, 6 (1983)
4. Danesi D.R., Chriarizia. *J. Solvent Extraction and Ion Exchange*. **3**, 162 (1985)
5. Babcock WC, Friesen DT, Lachapelle ED. *J Membr Sci*. **26**, **3** (1986)
6. Reed DL, Bunge AL, Noble RD. *In: Noble RD, Way JD (eds) Liquid membranes: theory and applications*. (American Chemical Society, Washington, DC, 1987)
7. Rusdianasari, Y. Bow, A. Taqwa. *Advanced Materials Research*. **896**, 145-148 (2013)
8. R. Rusdianasari, A. Meidinariasty, I. Purnamasari. *Int. J. on Adv. Sci. Eng. and Information Tech*. **5**, 6 (2015)
9. Y. Bow, H. Hairul, and I. Hajar. *Int. J. on Adv. Sci. Eng. and Inf. Tech* **5**, 6 (2015)
10. Othman N, Mat H, Goto M. *J Membr Sci* **282** (2006)
11. SannaBjorkergen, Rose Fassihi Karim, Anna Martinelli, Natesan Subramanian and Mohd. Ali Hashim. *J. Membranes*. **5**, 2 (2015).



046/UN9.2/LL/Sricoenv.Pps.Unsri/2018

**GRADUATE SCHOOL
UNIVERSITAS SRIWIJAYA**

**This
CERTIFICATE OF PARTICIPATION**

is hereby given to

Rusdianasari, Yohandri Bow, Tresna Dewi and Eka Sri Yusmartini


For having actively participated as PRESENTER during

THE 1st SRIWIJAYA INTERNATIONAL CONFERENCE ON ENVIRONMENTAL ISSUES

held on 26-27 September 2018 at Horison Ultima Hotel, Palembang, Indonesia.



HERMANSYAH
Conference Chairman



PROF. AMIN REJO
Director