About the Journal

Journal of Ecological Engineering (JEE) is a peer-reviewed international journal that publishes original research and review articles in the areas of the protection and restoration of the natural environment.

All articles are published full in English.

The articles are published in an electronic version, and the printed version does not appear. In our journal there are not special issues published.

JEE is a member of CrossRef - the citation-linking backbone for online publications.

Our ethic statements are based on COPE's Best Practice Guidelines for Journal Editors – available online at http://publicationethics.org/resources/code-conduct

iThenticate - a plagiarism detection service

iThenticate service was developed in partnership with CrossRef. It is the most prominent similarity check service of plagiarism detection include intellectual property protection and document-versus-documents analysis. The editorial board undertake the comprehensive manuscripts screening, aiming to eliminate plagiarism and provide a high standard and quality peer-review process.

Topics of the Journal

- · Industrial and municipal waste management
- · Pro-ecological technologies and products
- Energy-saving technologies
- Environmental landscaping
- · Environmental monitoring
- Climate change in the environment
- · Sustainable development
- Processing and usage of mineral resources
- Recovery of valuable materials and fuels
- Surface water and groundwater management
- Water and wastewater treatment
- Smog and air pollution prevention
- Protection and reclamation of soils
- Reclamation and revitalization of degraded areas
- Heavy metals in the environment
- Renewable energy technologies
- Environmental protection of rural areas
- Restoration and protection of urban environment
- Prevention of noise in the environment
- Environmental life-cycle assessment (LCA)
- Simulations and computer modeling for the environment
- Geographical Information Systems (GIS) and remote sensing applications

Abstracting and Indexing

- Emerging Sources Citation Index (ESCI) Web of Science Core Collection
- SCOPUS
- DOAJ Directory of Open Access Journals
- EBSCOhost
- I-Gate
- IC Journals Master List
- Google Scholar
- CNKI Scholar
- BazTech
- PBN Polska Bibliografia Naukowa


The frequency of issues

Quarterly, from 2013 to 2016 Bimonthly, from 2017 to 2018 Irregular, from 2019, continued

The history of the Journal

From 2000 to 2012, in Polish – *Inżynieria Ekologiczna* (print, ISSN 2081-139X) From 2013, continued – *Journal of Ecological Engineering* (on-line, ISSN 2299-8993)

Journal Metrics





Influence of Sieve Size on Calorific Value and

Proximate Properties of Bio-Briquette





Q



Editorial Board

EDITOR-IN-CHIEF:

Gabriel Borowski – Environmental Engineering Faculty, Lublin University of Technology, Poland e-mail: g.borowski@pollub.pl

INTERNATIONAL SCIENTIFIC BOARD:

Ghaida Abdulkareem Abu-Rumman – Isra University, Amman, Jordan

Antonio Joao Carvalho de Albuquerque – University of Beira Interior, Covilhã, Portugal

Sameh Alsaqoor - Tafila Technical University, Jordan

Süer Anaç - Ege University, Izmir, Turkey

Nelson Barros – University of Fernando Pessoa, Porto, Portugal

Zhihong Cao - Institute of Soil Sciences, Chinese Academy of Sciences, Nanjing, China

Mariola Chomczyńska – Lublin University of Technology, Poland

Aneta Czechowska-Kosacka – Lublin University of Technology, Poland

Maria de Fátima Nunes de Carvalho – Polytechnic Institute of Beja, Portugal

Magdalena Gajewska – Gdańsk University of Technology, Poland

Joan Garcia - Polytechnic University of Catalonia, Barcelona, Spain

Hassimi Abu Hasan – National University of Malaysia Faruque Hossain – New York University, New York, USA

Katarzyna Ignatowicz – Bialystok University of Technology, Poland

Krzysztof Jóźwiakowski – University of Life Sciences in Lublin, Poland

Aleksander Kiryluk – Bialystok University of Technology, Poland

Michał Kopeć – University of Agriculture in Kraków, Poland

Joanna Kostecka - University of Rzeszów, Poland

Peter Kováčik – Slovak University of Agriculture (SUA) in Nitra, Slovak Republic

Justyna Kujawska - Lublin University of Technology, Poland

Grzegorz Kusza - Opole University, Poland

Maria Cristina Lavagnolo - University of Padova, Italy

Myroslav S. Malovanyy – Lviv Polytechnic National University, Ukraine

Fabio Masi - IRIDRA S.r.l., Florence, Italy

Yurij A. Mazhaysky - Ryazan State Agricultural Academy, Ryazan, Russia

Álvaro Monteiro - University of Fernando Pessoa, Porto, Portugal

Adam M. Paruch - Norwegian Institute for Agricultural and Environmental Research - Bioforsk, Norway

Ryszard Pokładek - Wrocław University of Environmental and Life Sciences, Poland

Katerina Pozachenyuk – Taurida National V.I. Vernadsky University, Ukraine

Harsha Ratnaweera - Norwegian Institute for Water Research - NIVA, Oslo, Norway

Czesława Rosik-Dulewska – Opole University, Poland

Hynek Roubík - Czech University of Life Sciences Prague, Czech Republic

Pavel Ryant - Mendel University in Brno, Czech Republic

Heralt Schöne - Neubrandenburg University of Applied Sciences, Germany

László Simon – University College of Nyíregyháza, Hungary

Elżbieta Skorbiłowicz – Bialystok University of Technology, Poland

Vladimir Soldatov – National Academy of Sciences of Belarus, Minsk, Belarus

Jung-Jeng Su – National Taiwan University, Taipei, Taiwan

Joanna Szulżyk-Cieplak – Lublin University of Technology, Poland

Agata Szymańska-Pulikowska - Wrocław University of Environmental and Life Sciences, Poland

Alexander Tsyganov – Belarusian State Agricultural Academy, Gorki, Belarus

Tomasz Tymiński – Wrocław University of Environmental and Life Sciences, Poland


Magdalena Daria Vaverková – Mendel University in Brno, Czech Republic

Sylvia Waara – Halmstad Univesity, Sweden

Raoul Weiler - University of Leuven, Belgium

Józefa Wiater - Bialystok University of Technology, Poland

Xiaoping Zhu - Hunter College of The City University of New York, USA

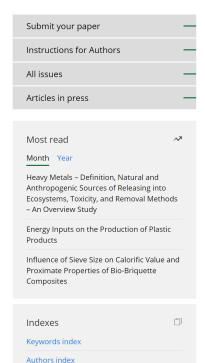





Editorial Office and Publisher

Editorial Office

Wojciechowska 7 / 211 20-704 Lublin, POLAND e-mail: office@jeeng.net

Editorial Team


Gabriel Borowski - Editor-in-Chief Mariola Chomczyńska – Managing Editor Joanna Szulżyk-Cieplak – Managing Editor Justyna Kujawska – Managing Editor Rozalia Skiba - Editorial Assistant Szymon Obrusiewicz – Language Editor Mikołaj Jachowicz - DTP Specialist

Peer Publishers:

Politechnika Lubelska - Lublin University of Technology Nadbystrzycka 38D 20-618 Lublin, POLAND www.pollub.pl

Polskie Towarzystwo Inżynierii Ekologicznej (PTIE) – Polish Society of Ecological Engineering Branch of PTIE in Lublin Nadbystrzycka 40B / 407 20-618 Lublin, POLAND www.ptie.pollub.pl

WNGB Wydawnictwo Naukowe - WNGB Scientific Publishing House Lazurowa 26 / 1 20-781 Lublin, POLAND www.wngb.pl

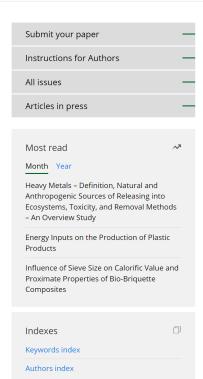





© 2006-2023 Journal hosting platform by Bentus

a

All issues

Volume 23, Issue 12, 2022



Fabrication and Characterization of Polyphenylsulfone/Titanium Oxide Nanocomposite Membranes for Oily Wastewater Treatment

Thaer Al-Jadir, Saja Mohsen Alardhi, Mustafa A. Alheety, Aya A. Najim, Issam K. Salih, Mustafa Al-Furaiji, Qusay F. Alsalhy J. Ecol. Eng. 2022; 23(12):1-13

DOI: https://doi.org/10.12911/22998993/154770

■ Abstract

Article (PDF)

لط Stats

Enhancement of Solar Water Disinfection Using Nano catalysts

Mohammad Ahmad Hamdan, Razan Al Louz, Ahmad Al Aboushi, Eman Abdelhafez

J. Ecol. Eng. 2022; 23(12):14-20

DOI: https://doi.org/10.12911/22998993/154775

■ Abstract

Article (PDF)

Lid Stats

Influence of Bacterial Microbiota on the Organic Matter Content of Shrimp Pond Soil

Laura Gema Mendoza Cedeño, María Fernanda Pincay Cantos, Jóse Miguel Giler-Molina, Ider Josue Zambrano Cedeño

J. Ecol. Eng. 2022; 23(12):21-28

DOI: https://doi.org/10.12911/22998993/154772

Pollution in Shatt Al-Arab River near Hospital Wastewater Disposal – Detection of Pharmaceutical Compounds, Isolation and Identification of Drug-Resistant Bacteria

Noor Kadhim Alsaad, Asia Fadhile Almansoory, Israa Abdulwahab Al-Baldawi

J. Ecol. Eng. 2022; 23(12):29-36

DOI: https://doi.org/10.12911/22998993/154843

Article (PDF)

Ш Stats

Kinetics of Pollutants Removal in Wetlands Influenced by Retention Time and Number of Plants Using Cyperus alternifolius

Danar Arifka Rahman, Eka Wahyudi Priambodo, Trisnadi Widyaleksono Caturputranto, Febri Eko Wahyudianto

J. Ecol. Eng. 2022; 23(12):37-43

DOI: https://doi.org/10.12911/22998993/154848

Article (PDF)

Lou Stats

Fate and Transfer of Heavy Metals in Constructed Wetland Mesocosms Subjected Different Hydraulic Regime

Alya A. Mohammed, Ahmed Sadiq Al Chalabi, Angham Omeer Sahei

J. Ecol. Eng. 2022; 23(12):44-49

DOI: https://doi.org/10.12911/22998993/154879

■ Abstract

Article (PDF)

Stats

The Role of Boron-Doped Diamond and Platinum Anodes in the Three-Compartment Electrochemical Pretreatment of Stabilized Landfill Leachate - Response Surface Methodological Approach

Arseto Yekti Bagastyo, Anita Dwi Anggrainy, Badriyah Rosyidah

J. Ecol. Eng. 2022; 23(12):50-60

DOI: https://doi.org/10.12911/22998993/154980

Abstract

Article (PDF)

Environmental Potential Impact on Biofuel Production from Thermal Cracking of Palm Shell using Life Cycle Assessment

Rusdianasari Rusdianasari, Leila Utarina, Leila Kalsum, Daya Wulandari, Yohandri Bow


J. Ecol. Eng. 2022; 23(12):61-67

DOI: https://doi.org/10.12911/22998993/154847

■ Abstract

Article (PDF)

Lid Stats

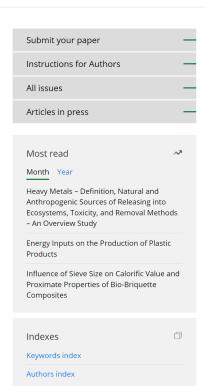

Sisnayati Sisnayati, Muhammad Said, Nabila Aprianti, Ria Komala, Hendra Dwipayana, Muhammad Faizal I. Ecol. Eng. 2022; 23(12):68-74 DOI: https://doi.org/10.12911/22998993/155081 Article (PDF) اس Stats Preparation of Environmentally Friendly Adsorbent using Oil Palm Boiler Ash, Bentonite and Titanium Dioxide Nanocomposite Materials Nurdin Bukit, Eva Marlina Ginting, Erna Frida, Bunga Fisikanta Bukit J. Ecol. Eng. 2022; 23(12):75-82 DOI: https://doi.org/10.12911/22998993/155020 **Ⅲ** Stats Abstract Article (PDF) Phytotoxicity Testing of Composts from Biodegradable Municipal Waste Martina Sláviková, Anna Báreková, Lucia Tátošová, Ladislav Ducsay J. Ecol. Eng. 2022; 23(12):83-88 DOI: https://doi.org/10.12911/22998993/154774 Article (PDF) Idd Stats ■ Abstract Acquisition Module for a Wireless Acoustic Sensor Network Suitable for Argentinian Urban Environments Matías Caccia, Eduardo Sacerdoti, Esteban Nicolas Lombera I. Ecol. Eng. 2022; 23(12):89-98 DOI: https://doi.org/10.12911/22998993/152436 ■ Abstract Article (PDF) Lad Stats Numerical Assessment of the Experimental Thermoelectric Cooling System Effectiveness Justyna Gołębiowska, Marcin K. Widomski J. Ecol. Eng. 2022; 23(12):99-110 DOI: https://doi.org/10.12911/22998993/154845 ■ Abstract Article (PDF) Lid Stats Effect of Hydraulic Characteristics on Fluid Transients Analysis under Different Types of Control Valves Basim M. Al-Zaidi, Abaas I. Ismaeel J. Ecol. Eng. 2022; 23(12):111-123 **DOI**: https://doi.org/10.12911/22998993/154731 ■ Abstract Article (PDF) Lid Stats Rainfall Threshold for Landslide Warning in the Southern Thailand - An Integrated Landslide Susceptibility Map with Rainfall Event - Duration Threshold Rattana Salee, Avirut Chinkulkijniwat, Somjai Yubonchit, Duc Bui Van J. Ecol. Eng. 2022; 23(12):124-133 DOI: https://doi.org/10.12911/22998993/155023 Abstract Article (PDF) lad Stats Using a Unmanned Aerial Vehicle to Assess Air Pollution and Identify Dominant Emission Sources Jacek Żeliński, Rafał Bigda, Marek Kucbel, Helena Raclavská, Michal Šafář, Barbora Švédová, Konstantin Raclavský, Dagmara Juchelková, Jana Růžičková, Jolanta Telenga-Kopyczyńska J. Ecol. Eng. 2022; 23(12):134-144 **DOI**: https://doi.org/10.12911/22998993/154880 ■ Abstract Article (PDF) Idd Stats Improving the Quality of Clay Powders by Mechanoactivation Volodymyr Bogoslavets, Yurii Voloshyn, Halyna Hrytsulyak, Lidiia Yurych J. Ecol. Eng. 2022; 23(12):145-154 DOI: https://doi.org/10.12911/22998993/155083 Abstract Article (PDF) **Ⅲ** Stats Study of Drought Effects on Three Medicinal and Aromatic Plants Using Field Spectroscopy Sarah El Azizi, Mina Amharref, Abdes-Samed Bernoussi J. Ecol. Eng. 2022; 23(12):155-162 DOI: https://doi.org/10.12911/22998993/154599 Article (PDF) L∎ Stats Research into Comparative Performance of Different Tillage and Fertilization Systems Applied to

Research into Comparative Performance of Different Tillage and Fertilization Systems Applied to Grey Forest Soil of Forest Steppe in Grain Crop Rotation

Changes in Climate and Bioclimatic Potential in the Steppe Zone of Ukraine

Vitalii Pichura, Larisa Potravka, Nataliia Vdovenko, Oleksandra Biloshkurenko, Natalia Stratichuk, Kira Baysha

J. Ecol. Eng. 2022; 23(12):189-202

DOI: https://doi.org/10.12911/22998993/154844

Abstract

Article (PDF)

لط Stats

Multivariate and Geostatistical Analyses of Groundwater Quality for Acid Rock Drainage at Waste Rock and Tailings Storage Site

Patrick Adadzi, Amy Allwright, Francois Fourie

J. Ecol. Eng. 2022; 23(12):203-216

DOI: https://doi.org/10.12911/22998993/153091

Abstract

Article (PDF)

Lid Stats

Model of Biomass Productivity Under the Influence of Change in the Phytotoxicity of Podzol Soil Due to Reintroduction of Sewage Sludge under Energy Willow

Vasyl Lopushniak, Halyna Hrytsuliak, Myroslava Polutrenko, Halyna Lopushniak, Yurii Voloshyn, Yulia Kotsyubynska, Bagdana Baran I. Ecol. Eng. 2022; 23(12):217–226

DOI: https://doi.org/10.12911/22998993/154773

Abstract

Article (PDF)

Stats

Pyrolytic Liquid Fuel - An Alternative for Producing Electrical Energy in Mexico

José Nolasco Cruz, Juan José López Ávila, Karla Donjuan Martínez, Irma Pérez Hernández, Álvaro Daniel Zavariz

J. Ecol. Eng. 2022; 23(12):227-232

DOI: https://doi.org/10.12911/22998993/153454

Abstract

Article (PDF)

اطا Stats

Chemical Content of Landfill Neoreliefs in the Territory of the Subcarpathia Forestry District of Ukraine

Kateryna Korol, Vasyl Popovych, Volodymyr Pinder, Taras Shyplat, Pavlo Bosak

J. Ecol. Eng. 2022; 23(12):233-253

DOI: https://doi.org/10.12911/22998993/153457

Abstract

Article (PDF)

L∎ Stats

Application of the Plackett-Burman Model on Soil Fertility Determinants

Imane Mehdaoui, Faiçal El Ouadrhiri, El Mokhtar Saoudi Hassani, Mohamed Ben Abbou, Mounia Elhaji, Mohamed Akhazane, Mustapha Taleb, Zakia Rais

J. Ecol. Eng. 2022; 23(12):254-263

DOI: https://doi.org/10.12911/22998993/155080

Article (PDF)

L∎ Stats

Active Capping Treatment of Copper and Chromium Contaminated Sediment with Bentonite Kaolin and Sand to Inhibit their Release to the Overlying Water

Mohammed Kabir Aliyu, Ahmad Tarmizi Bn Abd Karim, Chee Ming Chan, Aeslina Abdulkadir, Zawawi Bin Daud, Adeleke Abdulrahman Oyekanmi

J. Ecol. Eng. 2022; 23(12):264-272

DOI: https://doi.org/10.12911/22998993/153395

Abstract

Article (PDF)

لط Stats

From Descriptive to Accurate Horseshoe Crab Size Variations in Wild Populations

Li Yu Chan, Akbar John, Salwa Shahimi, Lusita Meilana, Chong Ju Lian, Loh Ing Hoe, Wong Chee Ho, Jayaraj Vijaya Kumaran, Siddhartha Pati, Bryan Raveen Nelson

J. Ecol. Eng. 2022; 23(12):273-284

DOI: https://doi.org/10.12911/22998993/154846

Abstract

Article (PDF)

L∎ Stats

Climate Change and its Effect on the Energy Production from Renewable Sources – A Case Study in Mediterranean Region

J. Ecol. Eng. 2022; 23(12):285-298

DOI: https://doi.org/10.12911/22998993/154062

■ Stats

Utilizing the Eutrophication in Bioresources Recovery and Biogas Production – A Case Study in Egypt

Mohamed Khalil, Elena Ficara, Nicola Colaninno, Amro El-Baz

J. Ecol. Eng. 2022; 23(12):299-313

DOI: https://doi.org/10.12911/22998993/155082

Abstract

Article (PDF)

■ Stats





© 2006-2023 Journal hosting platform by Bentus

Journal of Ecological Engineering 2022, 23(12), 61–67 https://doi.org/10.12911/22998993/154847 ISSN 2299–8993, License CC-BY 4.0 Received: 2022.08.30 Accepted: 2022.10.13 Published: 2022.11.01

Environmental Potential Impact on Biofuel Production from Thermal Cracking of Palm Shell Using Life Cycle Assessment

Rusdianasari¹, Leila Utarina^{1*}, Leila Kalsum¹, Daya Wulandari¹, Yohandri Bow²

- ¹ Department of Renewable Energy Engineering, Politeknik Negeri Sriwijaya, Jl. Srijaya Negara Bukit Besar Palembang, 30139, Indonesia
- ² Department of Energy Engineering, Politeknik Negeri Sriwijaya, Jl. Srijaya Negara Bukit Besar Palembang, 30139, Indonesia
- * Corresponding author's email: leilautarina99@gmail.com

ABSTRACT

The aim of the study was to determine the environmental potential impact of the palm shell biofuel production process using life cycle assessment (LCA) through gate to gate approach. The environmental impact of each scenario was assessed using ISO 14040 (2006), which includes goal and scope definition, life cycle inventory (LCI), life cycle impact assessment (LCIA) and interpretation. The simapro v.9 software with ecoinvent 3.5 database was utilized to assess the environmental effect. The impact analysis method used is Impact 2002+. Functional units were used to show environmental references in damage assessment and characterization, such as energy use and global warming potential. The results show that the environmental impact evaluation obtained through LCA for the entire biofuel production process stated that the thermal cracking stage resulted in the highest global warming impact, compared to other processes, which was 118.374 kg CO₂ eq. For the categories of human health, ecosystem quality, and climate change, each has a value of 0.0001 DALY; 15.708 PDF·m²·yr; and 335.233 kg CO, eq where this value is the total damage assessment of the entire biofuel production process. From the results of the analysis by utilizing the networking graph on the simapro application, it can be seen that the environmental hotspot of the thermal cracking process of biofuel production is due to the use of electricity from the State Electricity Company (PLN) and the release of chemical substances from the process. To improve the environmental performance of biofuel production process, additional development steps are required to increase biofuel yield, purification efficiency of biofuel to obtain pure liquid fuel, and the use of renewable energy sources to generate electricity. Additionally, more particular data would be required for a more precise LCA study result.

Keywords: biofuel; life cycle assessment; palm shell.

INTRODUCTION

Currently, Indonesia's energy needs are not matched by the availability of fossil energy (Wulandari et al., 2022; Yunsari et al., 2019). In response to rising energy demand, depletion of fossil-based resources, and environmental consequences of using non-renewable energy sources, the exploration of alternative renewable energy sources is essential to attaining green and sustainable development (Chan et al., 2018). Biomass energy has the potential to be utilized as a renewable energy source. Due to its availability, lignocellulosic biomass has been adopted as a

raw material for biofuel production worldwide (Rattanaporn et al., 2017). Utilizing biomass energy as fuel is referred to as biofuel. Biofuels are liquid fuels derived from vegetable oils (Bow et al., 2020). The biomass waste from forests, plantations, industries, and households can be utilized to produce vegetable oil. Palm oil waste is one of the potential biomass types that can be utilized.

Indonesia is currently the world's largest producer of palm oil. Palm oil is generated in palm oil refineries by refining crude palm oil (CPO) (Sabarman et al., 2019). The production of palm oil results in the daily generation of waste; this includes solid waste in the form of empty fruit

bunches (EFB), fibers, and palm shells, as well as liquid waste in the form of slurry oil. Shells from palm oil are one of the most significant byproducts of palm oil processing, accounting for as much as 60 percent of total oil output. To this day, palm kernel shells have only been utilized as a fuel for boilers, which provides both heat and mechanical energy, or as a landfill material (Lau et al., 2019). This utilization has not maximized the components contained in palm shells. The advanced technology that is currently available may be used to process palm oil shells, which allows for optimal use as well as the creation of biofuels.

The application of conversion technology must be suited to the properties of the biomass. Variable proportions of hemicellulose, cellulose, and lignin are present in oil palm biomass waste. Because palm oil biomass waste consists of lignocellulosic materials with a high lignin content, it is incompatible with the biochemical process (Wang et al., 2020). The thermochemical conversion technique known as thermal cracking is the type of technology that can be utilized for the process of conversion. During the thermal cracking process, the raw materials that contain cellulose components of up to 81.41% and hemicellulose of up to 44.2% can be converted into biofuels, while lignin can be converted into charcoal at a rate of 40.33% (Xu et al., 2020). The production process of the biofuel from biomass waste including palm shell may have environmental consequences that require further study.

Life Cycle Assessment, also known as LCA, is a method that can forecast and analyze the impact that a product or process has on the environment, assuming that it is sustainable (Darojat, 2019). LCA is also defined as a method for evaluating the performance of a product system or technical process based on its effects on the environment over the course of its life cycle. This evaluation can be done at any time during the product's life cycle (Zhou et al., 2017). The LCA approach makes it feasible to examine the environmental impacts that emerge from all stages in the life cycle of a product, including the impacts that are frequently missed in the analyses carried out using traditional methods. This is one of the primary benefits of the LCA process. Some examples of the impact are the removal of waste, the transportation of materials, and the disposal of waste. The LCA is able to provide a more thorough perspective of the environmental impacts of a product or process that already exists (Meex et al., 2018). An indepth LCA study that begins at the beginning of the process and continues until the product is used can serve as a foundation for decision-making on the technologies involved in biomass conversion. LCA follows a step-by-step and methodical process that is broken down into four stages which can be explained in Figure 1.

The adoption of LCA in Indonesia is still in its infancy, as seen by the comparative paucity of publications compared to other Southeast Asian nations (Wiloso, 2019). However, during the past five years, there has been a considerable growth, reflecting a growing interest in LCA, as was the case with a number of previous studies utilizing the same technique as thermal conversion when biomass is converted into biofuel (Dang et al., 2014; Guo et al., 2017), as well as LCA

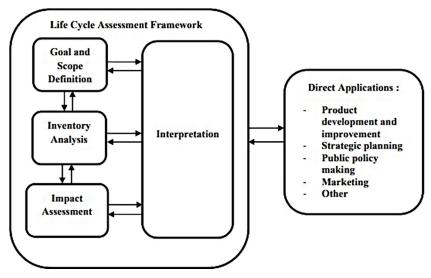


Figure 1. LCA Phases Framework (Fiksel, 2009)

perspective on biofuel production (Togarcheti et al., 2017; Chan et al., 2018). In addition, none of these publications investigated the environmental implications using a systematic LCA. The process of converting biomass waste may have the environmental effects that require further investigation. In addition, this study seeks to identify the difficulties and opportunities facing LCA research in Indonesia.

METHODOLOGY

LCA is utilized to identify, measure, analyze, and quantify the consumption of resources/raw materials, energy, chemicals, products, emissions/ waste, and other production-related elements (Finkbeiner, 2013). On the basis of ISO 14044-2006, the LCA stages consist of (1) Determining goals and boundaries (goal and scope); (2) life cycle inventory (LCI) includes the input and output data on the production process of oil palm shell biofuel; (3) life cycle impact assessment (LCIA), an assessment of the impact to the environment using the Impact 2002+ method; (4) Interpretation, The phase of deriving findings based on the correlation between LCI and LCIA and determining environmental improvement recommendations.

This research was conducted in the chemical laboratory of Politeknik Negeri Sriwijaya, and the environmental impact assessment was completed utilizing the simapro v.9 software and ecoinvent 3.5 database. This database serves as a reference for the data hypothetically. Primary data in the

program is derived directly from field study, while secondary data comes from appropriate sources.

RESULTS AND DISCUSSION

Goal and scope definition

The first step of an LCA study is establishing objectives and scopes. This study sought to determine the potential environmental effects of the biofuel generation process using oil palm shells. This LCA study approach is highly effective for enhancing process efficiency and providing accurate environmental load assignments to optimize environmental improvements, and it enables the modeling of multiple products using a single process (Wulandari et al., 2022). Meantime, the scope of the LCA analysis in this study is gate to gate, encompassing only the processing of palm shell to produce the product. The impact analysis method used is Impact 2002+ (Jolliet, 2013) with the impact analyzed in the form of (1) damage assessment; human health, ecosystem quality, climate change and resources and (2) characterization; Non-renewable energy, non-carcinogens, aquatic ecotoxicity, carcinogens, global warming, ionizing radiation, terrestrial ecotoxicity, terrestrial acid, aquatic acidification mineral extraction, respiratory inorganics, respiratory organics, aquatic eutrophication, ozone layer depletion, land occupation. System boundary defined by a dashed-line box for production from thermal cracking. Figure 2 shows the system boundary of this study.

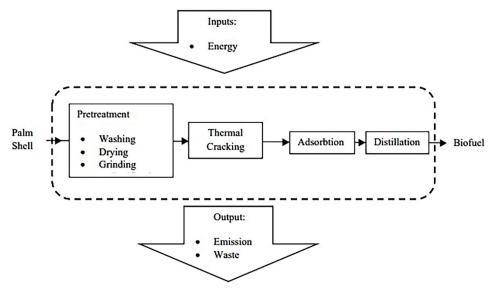


Figure 2. Boundary system of biofuel production process

Life cycle inventory

The second stage is LCI. The conceptual process and working condition of this study are founded on the authors' prior lab-scale experimental method and outcomes (Rusdianasari et al., 2022; Utarina et al., 2022). The input and output inventory stage of the palm shell biofuel production process or LCI is adjusted based on Table 1. Input data is in the form of materials / raw materials, energy, and chemicals. In turn, output data is in the form of production results, production by-products (waste) and emissions.

The biofuel production process with thermal cracking consists of pre-treatment, thermal cracking, adsorption, and distillation processes. This process produces a product, namely biofuel, and by-products in the form of gas and charcoal. The data used in this life cycle inventory is data taken under operating conditions with a temperature of 450°C because that temperature produces the most optimal biofuel product compared to other temperature conditions. Each process is interconnected with each other, because the product of each process affects the product results in the next process and forms a data flow called networking.

Life cycle impact assessment

The next stage was LCIA. At this stage, all input and output data obtained are entered and

processed using SimaPro V.9 software. The method used to estimate the magnitude of the environmental impact on the biofuel production process from oil palm shells is Impact 2002+. The Impact 2002+ method has four main impacts in damage categories; human health, ecosystem quality, climate change and resources. Meanwhile for characterization, there are the following categories: Non-renewable energy, non-carcinogens, aquatic ecotoxicity, carcinogens, global warming, ionizing radiation, terrestrial ecotoxicity, terrestrial acid, aquatic acidification mineral extraction, respiratory inorganics, respiratory organics, aquatic eutrophication, ozone layer depletion, land occupation. The impact results processed using SimaPro V.9 software are presented in Table 2, Table 3, Figure 3, and Figure 4.

Interpretation

Damage assessment

Damage assessment is an analysis that utilized to measure the impact of the ensuing damage based on its characterization impact (Volta et al., 2021). This analysis is useful as a consideration in making decisions to improve the environmental performance. Table 2 shows the categories of damage by biofuel production activities. Below is an explanation of multiple units, including MJ primary, kg CO₂ eq, PDF·m²·yr, and DALY

Table 1. LCI of biofuel production process

Category	Inventory data	Amount	Unit						
	Input								
Material	Fresh palm shell	18	kg						
	Pretreated palm shell	15	kg						
	Natural zeolite	2	kg						
	Tap water	6E-03	m³						
	Aquadest	3E-03	m³						
Energy	Drying shed	18	kWh						
	Grinder	18.5	kWh						
	Oven (120 °C)	0.75	kWh						
	Hotplate	1	kWh						
	Heater in thermal cracking reactor (300–450 °C)	1200	kWh						
	Pump	38	kWh						
Solvent	HCI 10%	1.8E-02	m³						
Output									
Product	Biofuel	29.73	%						
Emission	Gas	30.81	%						
	Char	39.46	%						

Table 2. Damage assessment of biofuel production process

Damage category	Unit	Total	Pretreatment	Thermal cracking	Adsorbtion	Distillation
Resources	MJ primary	6593.348	5.139578	2123.801	2134.29	2274.227
Climate change	kg CO₂ eq	335.233	0.51253	106.021	106.91	118.374
Ecosystem quality	PDF*m²*yr	15.708	0.007756	4.560	4.740	5.236
Human health	DALY	0.0001	1.65E-05	2.41E-05	2.46E-05	2.69E-05

Table 3. Characterization of biofuel production process

Impact category	Unit	Pretreatment	Thermal cracking	Adsorbtion	Distillation
Non-renewable energy	MJ primary	5.139	2123.358	2133.745	2273.554
Non-carcinogens	kg C ₂ H ₃ Cl eq	4.881	3.276	3.306	3.349
Aquatic ecotoxicity	kg TEG water	3.724	2021.062	2956.419	3138.572
Carcinogens	kg C ₂ H ₃ Cl eq	0.966	0.853	0.861	0.876
Global warming	kg CO ₂ eq	0.512	118.374	56.911	106.020
lonizing radiation	Bq C-14 eq	0.306	77.96239	81.381	241.522
Terrestrial ecotoxicity	kg TEG soil	0.280	479.508	494.304	543.092
Terrestrial acid/nutri	kg SO ₂ eq	0.005	0.516	0.526	0.602
Aquatic acidification	kg SO ₂ eq	0.001	0.089	0.092	0.113
Mineral extraction	MJ surplus	0.0001	0.443	0.551	0.6728701
Respiratory inorganics	kg PM _{2.5} eq	0.0001	0.017	0.0184	0.021
Respiratory organics	kg C ₂ H ₄ eq	4.73E-05	0.011	0.011	0.012
Aquatic eutrophication	kg PO₄ P-lim	7.46E-06	0.001	0.001	0.002
Ozone layer depletion	kg CFC-11 eq	1.36E-08	5.99E-06	6.09E-06	6.68E-06
Land occupation	m²org.arable	8.77E-09	0.117	0.123	0.143

that can be used to calculate the amount of damage caused by an event (Volta et al., 2021).

- 1. DALY is the amount of years a person loses due to health issues, disability, or early death. One DALY equals one year of healthy life lost. There is 0.0001 of the total DALY in human health based on damage assessment of biofuel production process. Each process only has a small difference in the range of DALY.
- 2. PDF·m²·yr is the proportion of species/ecosystem that could be lost per m² per year. This unit is used to measure an ecosystem's influence. One PDF·m²·yr is equivalent to 1 m² of damage to species or ecosystems on the Earth's surface over the course of 1 year. Pre-treatment has the smallest value compared to other processes. This is because the pre-treatment waste can still be recycled in the existing ecosystem.
- 3. MJ Primary is the amount of energy needed to extract a natural resource. The total MJ Primary of the whole production process is 6593.348.
- 4. Kg CO₂ eq is the unit of measure for the category of impact characteristics of global warming,

and the consequence is global climate change. According to the analysis in Figure 4, the thermal cracking, adsorption, and distillation procedures all have the same global warming impact distribution.

Characterization analysis

Characterization is quantity evaluation of the chemicals that contribute to the impact category in biofuel production based on the characterization characteristics of such substances as shown in Table 3. In the other words, the substances listed in characterization are described the consisting material inside damage assessment. In this characterization analysis, it is known that each activity in the biofuel production process has the same potential value for each impact in different units. There are 15 impact categories that have been successfully analyzed in the application. For a clearer comparison, a graphical image can be seen in Figure 3. The thermal cracking process is the process with the largest impact category, then followed

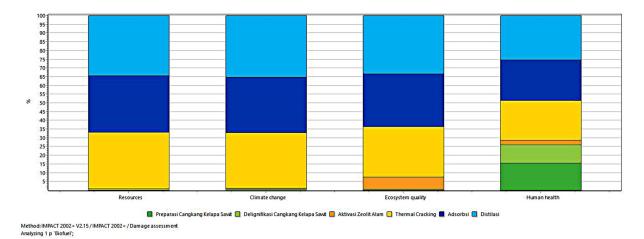


Figure 3. Damage assessment's graph

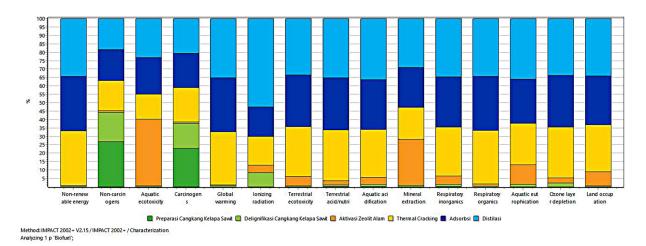


Figure 4. Characterization's graph

by the distillation process. Thermal cracking has an impact on global warming of 118.37437 kg CO₂ eq, where this value is the largest value among other processes. Meanwhile, the process that has the lowest impact on global warming is the raw material preparation process, which is 0.5125298 kg CO₂ eq.

CONCLUSIONS

In this study, the LCA of palm shell biofuel production process was presented. On a gate to gate basis, the environmental performance of this process in terms of numerous environmental consequences was calculated. The results show that the environmental impact evaluation obtained through LCA according to ISO 14044 for the entire biofuel production process stated that the thermal cracking stage resulted in the highest global warming impact compared to

other processes, which was 118.374 kg CO₂ eq. For the categories of human health, ecosystem quality, and climate change each has a value of 0.0001 DALY; 15.708 PDF·m²·yr; and 335.233 kg CO, eq where this value is the total damage assessment of the entire biofuel production process. From the results of the analysis by utilizing the networking graph on the simapro application, it can be seen that the environmental hotspot of the thermal cracking process of biofuel production is due to the use of electricity from the State Electricity Company (PLN) and the release of chemical substances from the process. To improve the environmental performance of biofuel production process, additional development steps are required to increase biofuel yield, purification efficiency of biofuel to obtain pure liquid fuel, and the use of renewable energy sources to generate electricity. Additionally, more particular data would be required for a more precise LCA study result.

Acknowledgments

This research was supported by the Renewable Energy Engineering Master's Program at Politeknik Negeri Sriwijaya.

REFERENCES

- 1. Bow, Y., Rusdianasari, R., Yunsari, S. 2020. CPO based biodiesel production using induction heating assisted. Oil Palm Research and Review, 1(1), 1–6.
- Chan, Y.H., Tan, R.R., Yusup, S., Quitain, A.T., Loh, S.K., Uemura, Y. 2018. Life cycle assessment (LCA) of production and fractionation of bio-oil derived from palm kernel shell: a gate to gate case study. Process Integration and Optimization for Sustainability, 2(4), 343–351.
- 3. Dang, Q., Yu, C., Luo, Z. 2014. Environmental life cycle assessment of bio-fuel production via fast pyrolysis of corn stover and hydroprocessing. Fuel, 131, 36–42.
- 4. Darojat, K., Hadi, W., Rahayu, D.E. 2019. Life Cycle Assessment (LCA) utilization of oil palm empty fruit bunches as bioenergy. In AIP Conference Proceedings. AIP Publishing LLC, 2194(1), 020019.
- Fiksel, J. 2009. Design for environment: a guide to sustainable product development. McGraw-Hill Education.
- 6. Finkbeiner, M. 2013. From the 40s to the 70s the future of LCA in the ISO 14000 family. The International Journal of Life Cycle Assessment, 18(1), 1–4.
- Guo, F., Wang, X., Yang, X. 2017. Potential pyrolysis pathway assessment for microalgae-based aviation fuel based on energy conversion efficiency and life cycle. Energy Conversion and Management, 132, 272–280.
- 8. Jolliet, O., Margni, M., Charles, R., Humbert, S., Payet, J., Rebitzer, G., Rosenbaum, R. 2003. IMPACT 2002+: a new life cycle impact assessment methodology. The international journal of life cycle assessment, 8(6), 324–330.
- Lau, S.Y., Phuan, S.L., Danquah, M.K., Acquah, C. 2019. Sustainable palm oil refining using pelletized and surface-modified oil palm boiler ash (OPBA) biosorbent. Journal of Cleaner Production, 230, 527–535.
- Meex, E., Hollberg, A., Knapen, E., Hildebrand, L., Verbeeck, G. 2018. Requirements for applying LCAbased environmental impact assessment tools in the early stages of building design. Building and Environment, 133, 228–236.
- Rattanaporn, K.; Roddecha, S.; Sriariyanun, M.; Cheenkachorn, K. 2017. Improving Saccharification of Oil Palm Shell by Acetic Acid Pre-treatment for Biofuel Production. Energy Procedia, 141, 146–149. DOI: 10.1016/j.egypro.2017.11.027
- Rusdianasari, R., Kalsum, L., Masnila, N., Utarina, L., Wulandari, D. 2022. Characteristics of Palm Oil

- Solid Waste and Its Potency for Bio-Oil Raw Material. In 5th FIRST T1 T2 2021 International Conference (FIRST-T1-T2 2021) Atlantis Press, 415–420.
- Sabarman, J.S., Legowo, E.H., Widiputri, D.I., Siregar, A.R. 2019. Bioavtur Synthesis from Palm Fatty Acid Distillate Through Hydrotreating and Hydrocracking Processes. Indonesian Journal of Energy, 2(2), 99–110. DOI: 10.33116/ije.v2i2.40
- 14. Suganthi, L. 2019. Examining the relationship between corporate social responsibility, performance, employees' pro-environmental behavior at work with green practices as mediator. Journal of cleaner production, 232, 739–750.
- 15. Togarcheti, S.C., Mk, M., Chauhan, V.S., Mukherji, S., Ravi, S., Mudliar, S.N. 2017. Life cycle assessment of microalgae based biodiesel production to evaluate the impact of biomass productivity and energy source. Resour Conserv Recycl, 122, 286–294.
- 16. Utarina, L., Rusdianasari, R., Kalsum, L. 2022. Characterization of Palm Shell-Derived Bio-Oil Through Pyrolysis. Journal of Applied Agricultural Science and Technology, 6(2), 139–148.
- 17. Volta, Y.A., Yusi, S. 2021. Life Cycle Assessment (LCA) in Pulp & Paper Mills: Comparison Between MFO With Biomass in Lime Kiln. In 4th Forum in Research, Science, and Technology (FIRST-T1-T2-2020) Atlantis Press, 323–327.
- Wang, Y., Wang, J., Zhang, X., Grushecky, S. 2020. Environmental and economic assessments and uncertainties of multiple lignocellulosic biomass utilization for bioenergy products: case studies. Energies, 13(23), 6277.
- Wiloso, E.I., Nazir, N., Hanafi, J., Siregar, K., Harsono, S.S., Setiawan, A.A.R., Fang, K. 2019. Life cycle assessment research and application in Indonesia. The International Journal of Life Cycle Assessment, 24(3), 386–396.
- Wulandari, D., Rusdianasari, R., Yerizam, M. 2022. Life Cycle Assessment of Production Bio-oil from Thermal Cracking Empty Fruit Bunch (EFB). AJARCDE (Asian Journal of Applied Research for Community Development and Empowerment), 6(3), 34–39.
- 21. Wulandari, D., Rusdianasari, Yerizam, M. 2022. Characterization Biofuel from Empty Fruit Bunch through Thermal Cracking. International Journal of Research in Vocational Studies (IJRVOCAS), 2(2), 15–22. DOI: 10.53893/ijrvocas.v2i2.104
- 22. Xu, L., Jiang, L., Zhang, H., Fang, Z., Smith, R.L. 2020. Introduction to pyrolysis as a thermo-chemical conversion technology. In Production of Biofuels and Chemicals with Pyrolysis. Springer, Singapore, 3–30.
- 23. Yunsari, S., Husaini, A. 2019. CPO Based Biodiesel Production using Microwaves Assisted Method. In Journal of Physics: Conference Series (Vol. 1167, No. 1, p. 012036). IOP Publishing.
- 24. Zhou H., Qian Y., Kraslawski A., Yang Q., Yang S. 2017. Life-cycle assessment of alternative liquid fuels production in China. Energy, 139, 507–522.