



HOME ABOUT LOGIN REGISTER SEARCH CURRENT ARCHIVES ANNOUNCEMENTS FOCUS & SCOPE AUTHOR GUIDELINES EDITORS REVIEWERS

CONTACT

Home > Announcements > Accreditation: SINTA-2

Accreditation: SINTA-2

Recently, Polimesin is accredited as the SINTA-2. From now, It is on the board of few prestigious journals in the Indonesian government indexing body, called SINTA (Science and Technology Index). Briefly, SINTA is a program under the education and culture ministry to encourage scientific publication in Indonesia, especially in a Journal.

Polimesin has a short journey to be on the high board. On April 13th, 2019, Polimesin got the 1st index in SINTA-4. By the Achievement, It is has been a sufficient reward for us, after the ISSN online version in 2017 was established. Then, the editor seriously acquired a better position. So, in the 2nd attempt was recredited on January 13th, 2020. But, the effort was only granted the same position, as SINTA 4. Striving for excellent, in the 3rd effort, On July 5th, 2020, after much improvement and revision in all the journal accreditation criteria and the website appearance, we did again a reaccrreditation. Unfortunately, when the assessor accessed our website, our website server that is managed by the institution was down. So, the decision was still at the Sinta-4.

Believing in our capacity in comparison to the other journal under the SINTA index, we do the 3rd reaccrreditation effort. Fortunately, on December, 29th 2021, it has been accredited as SINTA-2 by a decree number: No: 158/E/KP/2021.

As the Editorial team always perceives that a success story has been an involvement many components in the publication process: authors, readers, reviewers, and editors. Last but not least, Lhokseumawe State Polytechnic (LSP) has provided us with an enough administration support.

Finally, Polimesin always try to be on the front to disseminate the widest mechanical engineering-related research work. At the same time, we never stop to find a way to make us recognized, indexed, and accredited by local, regional as well as the best international body. So, let acquire the highest possible benefit by publishing your work with us.

ABSTRACTING & INDEXING BY:



Ciptaan disebarluaskan di bawah Lisensi Creative Commons Atribusi-BerbagiSerupa 4.0 Internasional.

Mailing Address:

Politeknik Negeri Lhokseumawe

Jl. Banda Aceh-Medan
Km. 280,3, Buketrata, Mesjid Punteut, Blang Mangat,
Kota Lhokseumawe, 24301

Propinsi Aceh,
Indonesia

Publication Ethics

Open Access Policy

Online Submission

Peer Review Process

Author Fees

Abstracting & Indexing

COLLABORATED WITH PDRI;



MoU Jurnal Polimesin-PDRI

Supported by :



ARTICLE TEMPLATE



ISSN

P-ISSN: 1693-5462 ; E-ISSN: 2549-1199



USER

Username

Password

Remember me

Login

JOURNAL CONTENT

Search

Search Scope

All

Search

Browse

- » By Issue
- » By Author
- » By Title
- » Other Journals

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

KEYWORDS

: Oil Treatment, Motor bensin, Viskositas, Aditif. Bacteria, Microcontroller, Ultraviolet Lamp, Robot CAD/CAE DOE Direct solar dryer, Indirect solar dryer FDM Mixed-mode solar dryer Solar drying Solar module, Rooftop solar power plants, On-grid, AMR kWh meter, kWh export-import Thermosiphon. Tobacco Leaves, refrigeration system, PLC, SCADA coffee beans coffee roasting machines cooling tower, filling material, relative humidity, temperature heating stoves mechanical design roasting time steam turbine, evaluation, maintenance, performance, optimization tensile test uncertainty analysis, thermocouple, loop heat pipe, passive cooling system, nuclear reactor welding repair, ASTM A36, tensile strength, hardness, macro test

Web Traffic Analysis



Web Traffic Analysis

WRITING TOOLS



JOURNAL HELP



Jurnal Polimesin

Disseminating information on the research of mechanical engineering
 Index: ICI, SINTA 2, Google Scholar ISSN Online: 2549-1199, ISSN Print: 1693-5462
 Department of Mechanical Engineering, Lhokseumawe State Polytechnic, Lhokseumawe 24301, Indonesia

HOME ABOUT LOGIN REGISTER SEARCH CURRENT ARCHIVES ANNOUNCEMENTS FOCUS & SCOPE AUTHOR GUIDELINES EDITORS REVIEWERS

CONTACT

Home > Archives > Vol 21, No 1 (2023)

Vol 21, No 1 (2023)

February

DOI: <http://dx.doi.org/10.30811/jpl.v2111>

Table of Contents

Study of Mechanical Strength of Composite Materials Made from Marble and Sago Fiber Waste for Rencong Marble Souvenirs Storage

Ihsan Anwar, Asbahrul Amri, Lindawati Lindawati, Sandika Putri Rahayu, Edi Saputra

PDF
1-3

Natural Dyes as a Photosensitizer from Dragon Fruit (*Hylocereus polyrhizus*) for Dye-Sensitized Solar Cells

Kartika Sari, Sunardi sunardi, Dita Asa Panunggul, Agung Bambang Setio Utomo, Parmin Lumban Toruan, Ampala Khoryanton

PDF
4-8

Effect of Volume Fraction and Alkalization Treatment on Mechanical Properties of Abaca Fiber Reinforced Composites as a Composite Board Substitute for Wood Products

Abubakar Dabet, Zulmiardi Zulmiardi, Ferry Safriwardi

PDF
9-16

Optimization of S-EDM Process Parameters on Material Removal Rate using Copper Electrodes

Khoirudin Khoirudin, Sukarman Sukarman, Nana Rahdiana, Ade Suhara, Ahmad Fauzi

PDF
17-20

The Effect of Rotational Speed on Friction Stir Welding (FSW) Quality of Dissimilar Aluminum Alloy Series AA 1100 and AA 5052

Tarkono Tarkono, Frengki Tenando, Nafrizal Nafrizal, Irza Sukmana

PDF
21-24

The Influence of Annealing Temperature and Holding Time Near Glass Transition Temperature on the Tensile Strength of Fused Deposition Modeling Printed Polylactic Acid

Michael Evan, The Jaya Suteja, Sunardi Tjandra

PDF
25-28

The Effect of Modular Portable Clamp on Electrical Heat Traces for Wellhead Icing Prevention

Arya Dwi Candra, Pradini Rahalintar, Akba Gushari, Muhammad Aulia Fikri, Novlian Adonia Borolla, Zulfan Zulfan, Zainal Abidin

PDF
29-32

Automatic Tobacco Dryer Refrigeration System Optimization Using PLC and SCADA

Syahid Syahid, Mochamad Muqorrobin, Yusnan Badruzzaman, Aggie Brenda Vernandez, Akhmad Jamaah

PDF
33-41

Optimization of the performance of the steam turbine SCSF-31.2" with 6 stages of axial exhaust in "X" geothermal power plant (PLTP "X")

Herawan Novianto, Zakiy Kamikho Harfy, Shultoni Mahardika, Sujono Sujono, Ayende Ayende

PDF
42-45

Optimization of Nickel Electroplating on Low Carbon Steel for Corrosion Resistance using Immersion Corrosiontest with 3.5% NaCl

Parulian Siagian, Richard A.M. Napitupulu, Eko Yohanes Setyawan, Muhammad Fakhri Amadika

PDF
46-49

The Effect of Varying Torrefaction Temperature on the Physical and Mechanical Properties of Briquettes Made from King Grass

Rifanida Rifanida, Adi Setiawan, Shafira Riskina, Abubakar Dabet, Alchalil Alchalil

PDF
50-54

Investigation of the Mechanical Behavior of Laminated Composites Gypsum-Based Plastic Sack Waste Fiber

Indra Mawardi, Samsul Bahri, Hamdani Nurdin, Irwin Syahri Cebro, Luthfi Luthfi, Zuhaimi Zuhaimi, Zuhaimi Zuhaimi, Ismi Amalia, Ismi Amalia

PDF
55-59

The Mixture of Molybdate and Ethoxylated Fatty Amines as Corrosion Protection in SAW Weld Joints of API 5L X-52 Pipeline Steel 3.5% NaCl Solution: Electrochemical Study

Hery Tristijanto, Mochammad Noer Ilman, Priyo Tri Iswanto

PDF
60-64

Publication Ethics

Open Access Policy

Online Submission

Peer Review Process

Author Fees

Abstracting & Indexing

COLLABORATED WITH PDRI;



MoU Jurnal Polimesin-PDRI

Supported by :



ARTICLE TEMPLATE



ISSN

P-ISSN: 1693-5462 ; E-ISSN: 2549-1199



USER

Username

Password

Remember me

Login

JOURNAL CONTENT

Search

Search Scope

All

Search

Browse

- » By Issue
- » By Author
- » By Title
- » Other Journals

Dove Tail Interlocking Tensile Stress Analysis Comparison of ABS and PLA Material in Solid Works SimulationPDF
65-72*Bertha Bintari Wahyujati, Felix Krisna Aji***Comparison Between a Thermosiphon and a Wick Heat Pipe Performance with Temperature Difference**PDF
73-76*Fazri Amir, Samsul Rizal, Razali Thaib, Hamdani Umar, Nasruddin A Abdullah***Evaluation of Tubing Diameter and Bean Size for Optimization of Well Production Rate**PDF
77-82*Arya Dwi Candra, Muhammad Firmansyah Hafidzullah, Rakha Reswara, Paradongan Siahaan, Dies Elita Budiyanti, Zainal Abidin***The Effect of SiC and Cu Weight Fraction on the Characteristics of Al 6061 Composite**PDF
83-87*Sumarji Sumarji, Danny Febriansyah, Mahros Darsin, Wazirotus Sakinah, R. Puranggo Ganjar Widitoyo***Archimedes Screw Turbine Application on Portable Mini Hydropower Plant**PDF
88-92*RD Kusumanto, M. Noviansyah Nugraha, Indrayani Indrayani***Design of Feed Rate Control System on Loss in Weight Feeder using Programmable Logic Controller**PDF
93-100*Asepta Surya Wardhana, Chalidia Nurin Hamdani, Astrie Kusuma Dewi, Javier Umar Ravy, Ferro Aji, Dwiana Hendrawati***Implementation of PID Controller on Hohenheim Tunnel Dryer Using Ziegler-Nichols Approach Method**PDF
101-107*Melinda Melinda, Rita Khatir, Ari Rahmat Putra Ibina, Alfatirta Mufti, Rizal Syahyadi, Iskandar Hasanuddin***Design Analysis of Hydraulic Lifter Spreader Assy LRT Using Finite Element Method**PDF
108-111*Ampala Khoryanton, Gutomo Gutomo, Sugeng Irianto, Farikah Tono Putri, Ahmad Hamim S***Optimization of Savonius Turbine Towards Different Inner Blade Positions to Improve Turbine Performance**PDF
112-117*Yusuf Dewantoro Herlambang, Supriyo Supriyo, Budhi Prasetyo, Abdul Syukur Alfauzi, Marliyati Marliyati, Wawan Purwanto, Fatahul Arifin, Zakki Fuadi Emzain***Static Continuous Passive Motion (CPM) Machine Simulation Tackle Therapy with SolidWorks**PDF
118-121*Felix Krisna Aji Nugraha, Antonius Hendro Noviyanto, Baskoro Latu Anurogo***Design and Manufacture of Portable Coffee Roaster with LPG Heater System**PDF
122-126*Dedi Suryadi, Satriyo Ramadhani, Agus Suandi, Nurul Iman Suparrdi, Novalio Daratha***The Effect of Adding Aluminum Scrap to Motor Vehicle Mufflers to Reduce the Danger of Exhaust Emissions**PDF
127-130*Ahmad Marabdi Siregar, Chandra Amirsyahputra Siregar, Khairul Umurani, Mulyadi Mulyadi, Tony Siagian, ML Teguh Samudra, Aufa Afika***Experimental Review of Cold Storage for Fishery Products in Aceh Island using Solar Energy**PDF
131-133*Khairunnas Nas Khairunnas, Ahmad Syuhada, Sarwo Edhy Sofyan***Gas Turbine Maintenance Optimizing using the Reliability-Centered Maintenance Method**PDF
134-139*Darmeim Darmeim, Marzuki Marzuki, Zuhaimi Zuhaimi, Fauzi Fauzi, Nurlaili Nurlaili, Luthfi Luthfi***Mechanical Properties Analysis of ASME SA-106 Grade B Pipe Material Welded Joints in Combination of SMAW and GTAW Welding**PDF
140-145*Marzuki Marzuki, Turmizi Turmizi, Bukhari Bukhari, Nawawi Juhan, Akhyar Ibrahim, Aris Khatami***The Effect of Current Density on Mechanical Properties of Electroplated Thin Copper Foil**PDF
146-151*Luthfi Luthfi, Yuniati Yuniati, Darmeim Darmeim, Sumardi Sumardi***Performance Analysis Cooling Tower Type Induced Draft with PVC Plate Filling Material**PDF
152-157*Mochamad Rizky Pradana, Astrie Kusuma Dewi, Natasya Aisah Septiani, Asepta Surya Wardhana, Muhammad Ramdhan, Wendy Triadji Nugroho*

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

KEYWORDS

: Oil Treatment, Motor bensin, Viskositas, Aditif, Bacteria, Microcontroller, Ultraviolet Lamp, Robot CAD/CAE DOE Direct solar dryer, Indirect solar dryer, FDM Mixed-mode solar dryer, Solar drying, Solar module, Rooftop solar power plants, On-grid, AMR kWh meter, kWh export-import Thermosiphon, Tobacco Leaves, refrigeration system, PLC, SCADA coffee beans coffee roasting machines cooling tower, filling material, relative humidity, temperature heating stoves mechanical design, roasting time, steam turbine, evaluation, maintenance, performance, optimization, tensile test, uncertainty analysis, thermocouple, loop heat pipe, passive cooling system, nuclear reactor welding repair, ASTM A36, tensile strength, hardness, macro test

Web Traffic Analysis



00377583

Web Traffic Analysis

WRITING TOOLS



JOURNAL HELP

ABSTRACTING & INDEXING BY:



SERTIFIKAT

Direktorat Jenderal Pendidikan Tinggi, Riset dan Teknologi
Kementerian Pendidikan, Kebudayaan, Riset dan Teknologi Republik Indonesia



Kutipan dari Keputusan Direktorat Jenderal Pendidikan Tinggi, Riset dan Teknologi
Kementerian Pendidikan, Kebudayaan, Riset, dan Teknologi Republik Indonesia

Nomor 158/E/KPT/2021

Peringkat Akreditasi Jurnal Ilmiah Periode 1 Tahun 2021

Nama Jurnal Ilmiah

Jurnal POLIMESIN

E-ISSN: 25491199

Penerbit: Politeknik Negeri Lhokseumawe

Ditetapkan Sebagai Jurnal Ilmiah

TERAKREDITASI PERINGKAT 2

Akreditasi Berlaku selama 5 (lima) Tahun, yaitu
Volume 18 Nomor 1 Tahun 2020 Sampai Volume 22 Nomor 2 Tahun 2024

Jakarta, 09 December 2021

Plt. Direktur Jenderal Pendidikan Tinggi,
Riset, dan Teknologi



Balai
Sertifikasi
Elektronik

Catatan :

1. UU ITE No 11 Tahun 2008 Pasal 5 Ayat 1 "Informasi Elektronik dan/atau hasil cetaknya merupakan alat bukti yang sah"
2. Dokumen ini telah ditandatangani secara elektronik menggunakan sertifikat elektronik yang diterbitkan oleh BSR-E

Prof. Ir. Nizam, M.Sc., DIC, Ph.D., IPU, ASEAN Eng
NIP. 196107061987101001



2022-08-24, Reviewed on 2022-10-23, Revised on 2022-12-01,
Copy edited on 2023-02-20, Layout edited on 2023-02-25 and
Available online on 2023-02-28

Archimedes Screw Turbine Application on Portable Mini Hydropower Plant

RD. Kusumanto^{1,2}, M. Noviansyah Nugraha², Indrayani^{2,3,*}

¹Study Program of Electrical Engineering, Sriwijaya State Polytechnic, Palembang 30139, Indonesia

²Magister Study Program of Renewable Energy Engineering, State Polytechnic of Sriwijaya, Palembang 30139, Indonesia

³Study Program of Civil Engineering, State Polytechnic of Sriwijaya, Palembang 30137, Indonesia

*Corresponding author: iin_indrayani@polsri.ac.id

Abstract

In this Turbine Design Analysis, we can obtain the necessary measurement results from one of the river locations where research is conducted. The original data for this objectivity was gathered by the authors through direct examination of the area or research site. This data was gained by three measurements: a direct survey of the location, quantitative measurements, and an analysis of the collected data. The authors obtain the necessary data such as differences in water level elevation (Head), Measurement of water discharge distribution (V), width of function on the river (L), and river area (A) and water discharge from the results of measurements to sites (Q). The tool's turbine efficiency has been calculated to be 55.6% based on the results of an analysis. Based on the acquired study, the developed turbine has two threads, a screw tilt angle of twenty-two degrees, and a length of eighty centimeters. In theoretical calculations, the hydropower's (PHydropower) generation power is 1114.42 Watt, the turbines (PTurbines) generation power is 664.2 Watt, and the generator's (PGenerator) generation power is 564.6 Watt. This value is used as a reference for selecting the type of generator to be utilized in the tool's design. Measurement of rotation of turbines the optimal turbine tilt angle for creating optimal turbine rotation is 30 degrees, resulting in a turbine speed of 402 revolutions per minute. The turbine tilt angle of 30 degrees (Optimal Angle) delivers the best results with an Electric Voltage (V) of 12.77 Volts and an Electric Current (I) of 2.51 Amps, according to the design tool's measurement data. Based on the results of an examination of electrical power output, a turbine tilt angle of 30° (Optimal Angle) delivers the best results with a residual power of 80 to 150 Watts when using a design tool suitable to steady and fast discharge conditions.

Keywords:

Design, Screw Turbine, Archimedes Screw Turbine, Hydropower Plant, Head Elevation Water

1. Introduction

Energy is unarguably the key factor in the current economic and social development of nations [1]. Along with population growth, this will surely lead to an increase in the demand for electrical energy, since almost all the activities carried out depend on electrical energy, while fossil energy as a source of energy is decreasing to meet the needs. in electricity from the people of Indonesia.

Research studies on the potential use of renewable energy sources, especially hydropower, need to be improved, including in the city of Palembang, which is one of the cities with many rivers.

Rivers have electricity potentials that await to be harvested. Even rivers that do not have a sufficiently large drop can still be used as hydroelectric power stations thanks to the design of turbines to optimize the energy generated by the power stations [2].

There are many types of hydroelectric turbines that have been used in a hydroelectric power station, including cross-flow turbines, Kaplan turbines, propeller turbines, turbo turbines, Francis turbines, and Pelton turbines. Each type of turbine has its own function, so the choice of the type of turbine must be adapted to the existing water flow and the height of the waterfall [3].

The Archimedean screw turbine is a type of hydraulic turbine that has only been studied in recent years, the advantages of this turbine include: (i) it can operate at low heads ($H < 10$ m), (ii) it does not require fast piping, (iii) easy to install, (iv) easy to maintain and (v) does not harm the aquatic ecology or is environmentally friendly (clean energy) [2]. The Archimedean screw/turbine is made around the central tube/shaft, which has its own diameter (internal diameter), while the central tube/shaft has an extension at both ends [4]

The Archimedes Screw turbine is a type of screw turbine that can be operated at low head, by converting the kinetic energy and potential energy of water flow into mechanical energy in the propeller blades so that the turbine shaft rotates and that can be converted into electrical energy in the generator via transmission [5][6][7]. Hydroelectricity is a renewable electricity that respects the environment because this plant uses water as a driving force [8]. There are different classifications of hydroelectric plants according to the power generated, namely Micro Hydro below 100 kW, Mini Hydro with 100 - 500 kW and Small Hydro 500 - 10,000 kW [9][10].

Based on the potential of the energy produced, it is possible to pursue the use of watercourses/ streams with a flat course or of watercourses with limited height differences to become a hydroelectric plant with a power of less than 100 kW, optimizing the turbine project for the production of electricity energy that respects the environment (Clean Energy).

Acknowledging the potential for water energy in Palembang City through rivers dispersed throughout the subdistricts, a research was done to assess the flow rate of the river and the height of the waterfall. This research is directed at the residents of South Sumatra, particularly the city of Palembang, which has the potential for water energy but is not optimally utilized as a hydroelectric power plant. Study results will then be utilized to construct a portable hydroelectric power plant to generate electricity using the Archimedes turbine. The plant is capable of driving a generator, despite the operating principle of an ASG is fundamentally distinct from the majority of other types of microhydro power turbines [11].

The AST is one type of water turbine that has the potential for environmentally benign small-scale energy generation, whereas the screw-type water turbine is ideally suited for rivers in Indonesia since its functioning requires just a low turbine head [12]. The water turbine is one of the most important and expensive components of micro-hydro power plants, depending on the site-specific requirements [13]. This portable hydroelectric power station is anticipated to provide a solution for fulfilling electricity demands in regions with low-fall river flows.

2. Research methods

The initial step of this design is to determine the amount of river flow by observing different rivers in the Palembang City region. Fig. 1 depicts the river observation points where river flow and water level were measured in a tributary of the Musi River in the Nine-Seti Ilir Village of Palembang.

The instruments and materials utilized in this study include flow meters, sticks measuring river depth, stopwatches, roll meters, LEDs, Hollow iron, bearing pads, fastening bolts, wires, casings, turbines, multimeters, tachometers, generators.



Fig. 1. Observational River Location

- The steps involved in designing the Archimedes screw turbine are:
- 1) 1) River observations, including measurement of the difference in water level elevation (Head), measurement of water flow velocity (V), and measurement of the width of the function in the river (L), and analysis of the area (A) and flow rate (Q) based on the findings of the observations [14].
 - 2) Designing Archimedes screw turbine. The turbine design plan can be seen in Fig. 2. [15]

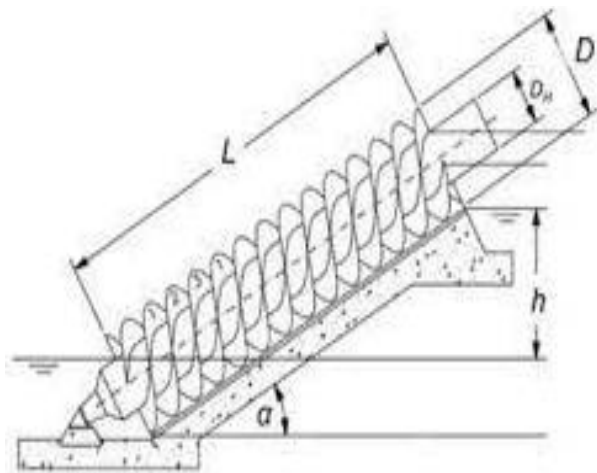


Fig. 2. Design Turbine Planning (Rorres, 2000)

- 3) Designing mini hydro power plant portable
- 4) Performance test, the performance test stage is carried out to test the finished tool design to match the planned amount of energy that has been calculated previously.

3. Results

3.1. Observational results

The height elevation flow (h_1) is at a water level elevation between the range of 60 cm and the lowest height (h_0) is at a water level elevation of about 20 cm. The results of the observations in table 1.

Using the results of the calculations in Table 1, the design of a mini portable hydroelectric turbine is continued, including the planning of the turbine angle plan, rotation speed, turbine diameter, turbine shaft diameter, screw angle, turbine length, turbine pitch

plan, turbine thread number, and turbine efficiency. Head Measurement Scene in Fig. 3.

Table 1. Observational Measurement Data [9]

Number	Data	Results
1.	Head Elevation (H)	40 cm
2.	Water Flow (V)	0.222 m/s
3.	Functional Length (L)	3.2 m
4.	River Area (A)	1.28 m ²
5.	Water Discharge (Q)	0.284 m ³ /s

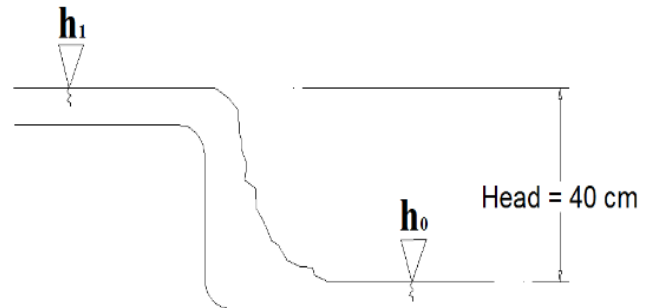


Fig. 3. Head Measurement Scene

3.2. Design of turbin dimensions

The results of the turbine design dimension analysis based on the data of Head, Discharge, speed, river width, and area to be designed are as follows: Turbine Type = Archimedes Screw; Screw Angle = 22 Degrees; Rotational Speed = 31 rpm; Outer Diameter = 30 cm or 0.3 m; Inner Diameter = 9 cm or 0.09 m; Turbine Angle = 30 Degrees; Length Turbine = 80 cm; Pitch Turbine = $1.2 D - 0.36$; Number of Screw = 2.222 pieces in 80 cm; Efficiency Turbine = 55.6%. The results of the turbine dimension design in Fig. 4. While the results of the tool design dimensions in Fig. 5.

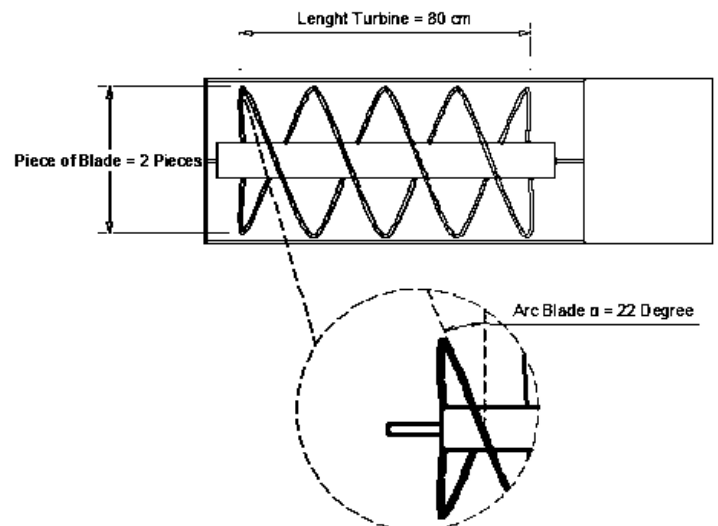
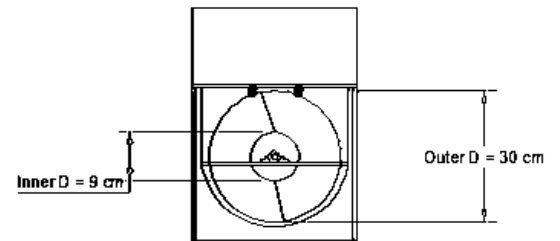


Fig. 4. The results of the turbine dimension design

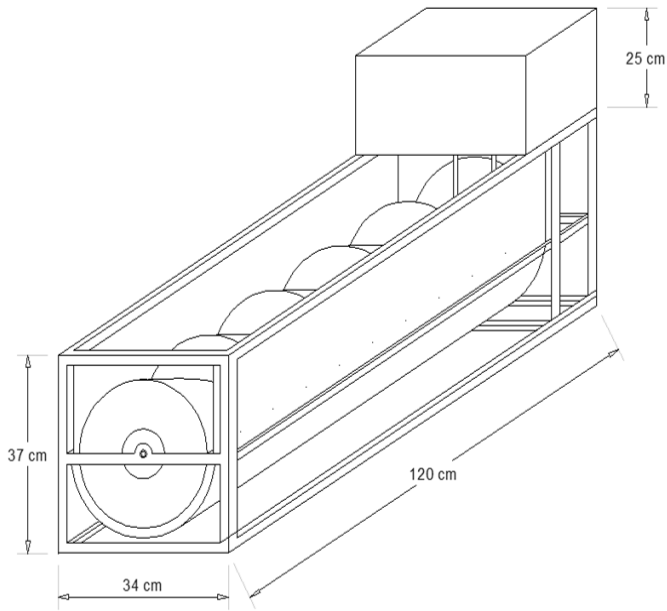


Fig. 5. Dimension Result of Mini HydroPower Plant Portable

This analysis is continued into the final stage, namely the detailed description of the turbine dimensions that have been analyzed.

3.3. Design mini hydro power plant portable

The final step is to compute the amount of energy created by the design of a portable micro hydropower system employing an Archimedes screw turbine. Fig. 6 depicts the schematic of a tiny portable hydroelectric power station.

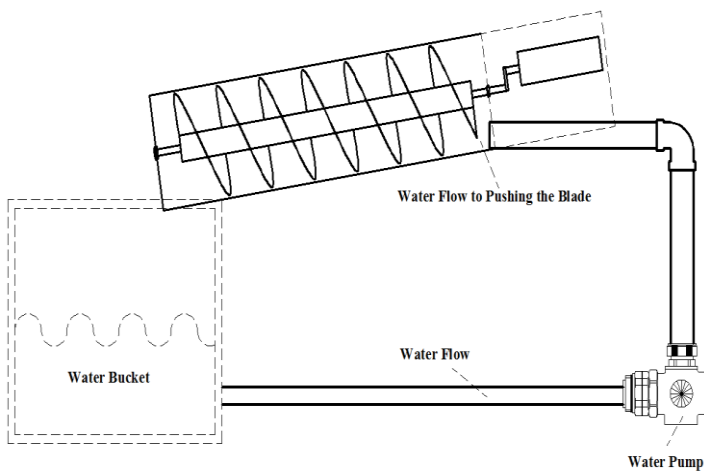


Fig. 6. Schematic Test in Mini Hydropower Plant Portable

From the results of the Calculation of Electrical Energy Power, $P_{Turbines}$ are obtained of 664.2 Watts, where the type of DC Generator used has a generation of 700-750 Watts, so that the calculation results obtained are close to the comparison variable of $P_{Turbines}$, then $P_{Turbines}$ DC Generator = 664.2Watt 700 - 750 Watts.

3.4. Performance test in rotational speed (RPM)

The Turbine Rotation Performance Test is conducted by measuring the turbine's rotational speed with a digital tachometer. In order to measure the speed of the turbine's rotation, the Tacholaser is directed 1-2 times in the direction of the turbine's rotation point, which has been marked with a Reflective Sticker. The measurement findings acquired from this Turbine Rotation Performance Test will be given in Table 2.

Table 2. Performance Test Rotational Speed

Water Discharge (m/s)	Angle Screw	Angle Turbine	Rotational Speed (rpm)
0,284 m ³ /s	22°	25°	347 rpm
		26°	350 rpm
		27°	356 rpm
		28°	358 rpm
		29°	360 rpm
		30°	402 rpm

From Table. 8 it can be seen that the right and efficient turbine tilt angle in producing optimal turbine rotation is at Angle (θ) = 30° with a turbine rotation result of 402 rpm. But the results can be optimized by changing the Diameter size of the pulley instead.

Spesification Pully:

1. Pully Turbine: Material Aluminium Diameter 3 Inch (7,62 cm)
2. Pully Generator: Material Aluminium Diameter OD100 – Diameter 10 cm

Asumstion from the Minimum rotation of generator between 600-800 rpm (Choose 600 rpm for the lowest). So, The Pully size had been changed inti 3 Inch Diameter. After changing the pully, re run the test again and Table 3 and Fig. 7 as a results of Optimized of rotational rpm eq. (1).

$$\frac{10 \text{ cm}}{7,62 \text{ cm}} = \frac{600 \text{ rpm}}{x \text{ rpm}} \quad (1)$$

$$x = 457 \text{ rpm}$$

Tabel 3. Performance Test Rotational Speed Optimized.

Water Discharge (m/s)	Angle Screw (°)	Angle Turbin (°)	Rpm	
			Turbin	Generator
0,284 m ³ /s	22°	25°	347 rpm	592 rpm
		26°	350 rpm	611 rpm
		27°	356 rpm	621 rpm
		28°	358 rpm	632 rpm
		29°	360 rpm	636 rpm
		30°	402 rpm	638 rpm

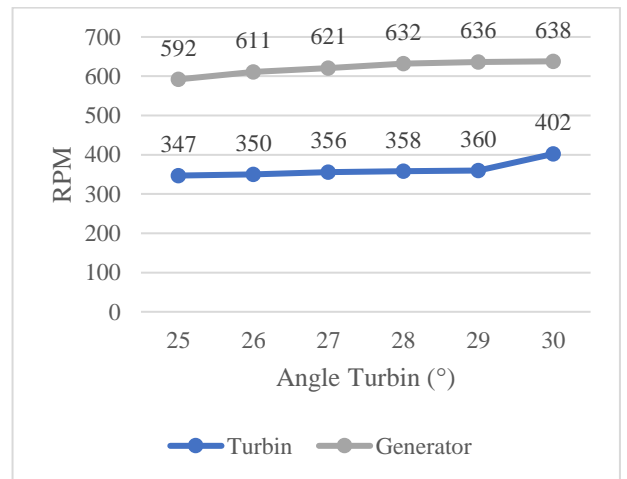


Fig. 7. Comparison Performance Test Rotational Speed

3.5. Performance test in voltage and electric current in design tool

Table 3 displays the measurement results of the Voltage (Volts) and Current (Amperes) of Electricity on the Design Tool, which were obtained using a Digital Multimeter to measure the voltage and current created by the Generator on the Design Tool.

Table 4 shows that the turbine tilt angle of 30° (Optimal Angle) produces the greatest results with an Electric Voltage of 44,3 Volts and an Electric Current of 3,39 Ampere with 150 Watt lamps loaded (6 Lamps x 25 Watt or 3 x 50 Watt Lamp – Each Lamp).

Table 4. Performance Test Voltage and Current Electrical in Hydropower Design

Water Discharge (m/s)	Angle Screw (°)	Angle Turbine (°)	Voltage (Volt)	Current (Ampere)
0,284 m ³ /s	22°	25°	42,00	2,80
		26°	43,50	2,87
		27°	43,70	3,15
		28°	43,80	3,22
		29°	43,90	3,34
		30°	44,30	3,39

3.6. Electrical Power Analysis Tool

The results of the Electrical Energy Power Analysis on the Design Tool are presented in Table 4. Table 5 that the turbine tilt angle is 30° (Optimal Angle) which still produces the greatest results with power 150,18 Watts.

Table 5. The results of the Electrical Energy Power Analysis on the Design Hydropower Plant.

Water Discharge (m/s)	Angle Screw	Angle Turbine	P Formula (Watt)	P (Watt)
Valve opening 100% 0,284 m ³ /s	22°	25°	P = V x I	117,60
		26°		124,85
		27°		137,66
		28°		141,04
		29°		146,63
		30°		150,18

3.7. Load test electrical

The results of the electrical power loading test using 3x50Watt (150Watt) LED lamps at a turbine angle of 30° still leaves a power generation of 150,18Watt. The results of the loading test in Table 6. Documentation of the load test results on the design tool is shown in Fig. 8.

Table 6. Results of Load Test Electrical

Angle Turbine (°)	P (Watt)	Lamp 150 Watt
30°	150,18 Watts	Light On

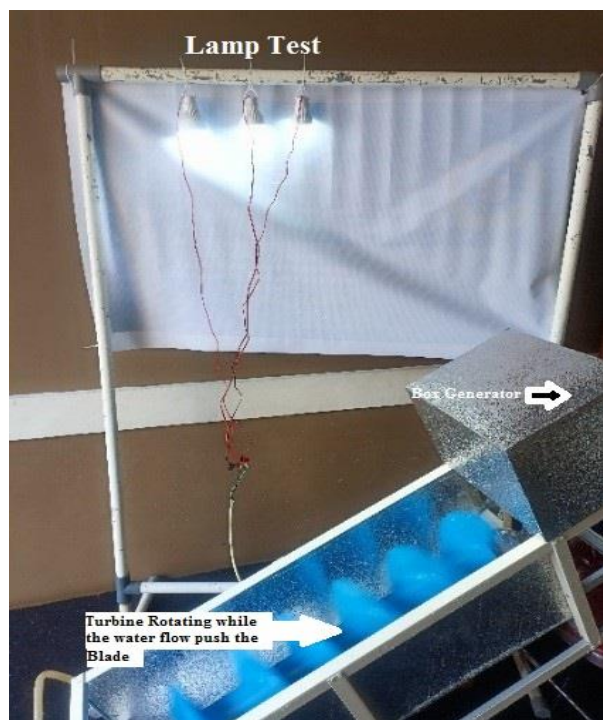


Fig. 8. Documentation of the load test resultson the design

The Load Test, while the water pumped by the water pump, the water flow and push the blade. When the water pushes the blade, it's make a blade rotating significant and continuously. While rotating, the blade pully makes a hub or connected with generator pully. So, the blade and generator rotating immediately compact, and make the electric processing. And then the test result, the Mini Hydropower Plant can give 150.18 Watts as a electric result.

4. Conclusions

The turbine efficiency has been calculated to be 55.6% based on the results of an analysis. Based on the acquired study, the developed turbine has two threads, a screw tilt angle of twenty-two degrees, and a length of eighty centimeters.

In theoretical calculations, the hydropower's (PHydropower) generation power is 1114.42 Watt, the turbines' (PTurbines) generation power is 664.2 Watt, and the generator's (PGenerator) generation power is 564.6 Watt. This value is used as a reference for selecting the type of generator to be utilized in the tool's design.

Measurement of Rotation of Turbines The optimal turbine tilt angle (°) for optimal turbine rotation is 30 degrees, with a turbine rotation result of 402 rpm in the Turbine and 632 RPM in the Generator.

The turbine tilt angle of 30 degrees (Optimal Angle) delivers the best results with an Electric Voltage (V) of 44,3 Volts and an Electric Current (I) of 3,39 Amperes, according to the design tool's measurement data.

Based on the results of an examination of electrical power output, a turbine tilt angle of 30 degrees (Optimal Angle) delivers the best results with a residual power of 100 to 150 Watts when using a design tool fitted to stable and fast discharge conditions.

References

- [1] Binama, M., Su, W. T., Li, X. Bin, Li, F. C., Wei, X. Z., & An, S. (2017). Investigation on pump as turbine (PAT) technical aspects for micro hydropower schemes: A state-of-the-art review. In *Renewable and Sustainable Energy Reviews*. <https://doi.org/10.1016/j.rser.2017.04.071>
- [2] Okot, D. K. (2013). Review of small hydropower technology. In *Renewable and Sustainable Energy Reviews*. <https://doi.org/10.1016/j.rser.2013.05.006>
- [3] Ramos, H. (1999). Guidelines for design of small hydropower plants. In *Guidelines for design of small hydropower plants*.
- [4] Dedić-Jandreč, H., & Nižetić, S. (2019). Small scale archimedes hydro power plant test station: Design and experimental investigation. *Journal of Cleaner Production*. <https://doi.org/10.1016/j.jclepro.2019.05.234>
- [5] Shahverdi, K., Loni, R., Maestre, J. M., & Najafi, G. (2021). CFD numerical simulation of Archimedes screw turbine with power output analysis. *Ocean Engineering*. <https://doi.org/10.1016/j.oceaneng.2021.108718>
- [6] Müller, G., & Senior, J. (2009). Simplified theory of Archimedean screws. *Journal of Hydraulic Research*. <https://doi.org/10.3826/jhr.2009.3475>
- [7] Lee, M. D., & Lee, P. S. (2021). Modelling the energy extraction from low-velocity stream water by small scale Archimedes screw turbine. *Journal of King Saud University - Engineering Sciences*. <https://doi.org/10.1016/j.jksues.2021.04.006>
- [8] Firmansyah, Syarif, A., Muchtar, Z., & Rusdianasari. (2021). Study of the Supply Water Discharge at the Micro Hydro Power Installation. *IOP Conference Series: Earth and Environmental Science*. <https://doi.org/10.1088/1755-1315/709/1/012002>
- [9] Indrayani, Ramadhani, R. C., & Yerizam, M. (2020). Preliminary Design of Micro Hydro Power Plant in Kelekar River , Ogan Ilir District. *Technology Reports of Kansai University*.

- [10] Indrayani, & Renny Citra, R. (2021). Design of Microhydro Power Plant Prototype Based on Kelekar River Flow Discharge. *IOP Conference Series: Earth and Environmental Science*. <https://doi.org/10.1088/1755-1315/832/1/012065>
- [11] Dellinger, G., Simmons, S., Lubitz, W. D., Garambois, P. A., & Dellinger, N. (2019). Effect of slope and number of blades on Archimedes screw generator power output. *Renewable Energy*. <https://doi.org/10.1016/j.renene.2019.01.060>
- [12] Saefudin, E., Kristyadi, T., Rifki, M., & Arifin, S. (2018). Turbin Screw Untuk Pembangkit Listrik Skala Mikrohidro Ramah Lingkungan. *Jurnal Rekayasa Hijau*. <https://doi.org/10.26760/jrh.v1i3.1775>
- [13] Kusakana, K. (2014). A survey of innovative technologies increasing the viability of micro-hydropower as a cost effective rural electrification option in South Africa. In *Renewable and Sustainable Energy Reviews*. <https://doi.org/10.1016/j.rser.2014.05.026>
- [14] Nugraha, M.N., Kusumanto, R.D., Indrayani. Preliminary Analysis of Mini Portable Hydro Power Plant Using Archimedes Screw Turbine. 2nd International Conference on Computer Science and Engineering (2nd IC2SE) at Universitas Putra Indonesia YPTK Padang. Indonesia. 2022. DOI: 10.1109/IC2SE52832. 2021.9791966.
- [15] Rorres, C. (2000). The Turn of the Screw: Optimal Design of an Archimedes Screw. *Journal of Hydraulic Engineering*. [https://doi.org/10.1061/\(asce\)0733-9429\(2000\)126:1\(72\)](https://doi.org/10.1061/(asce)0733-9429(2000)126:1(72))