


LAMPIRAN



Bimbingan Laporan Dengan Dosen Pembimbing.

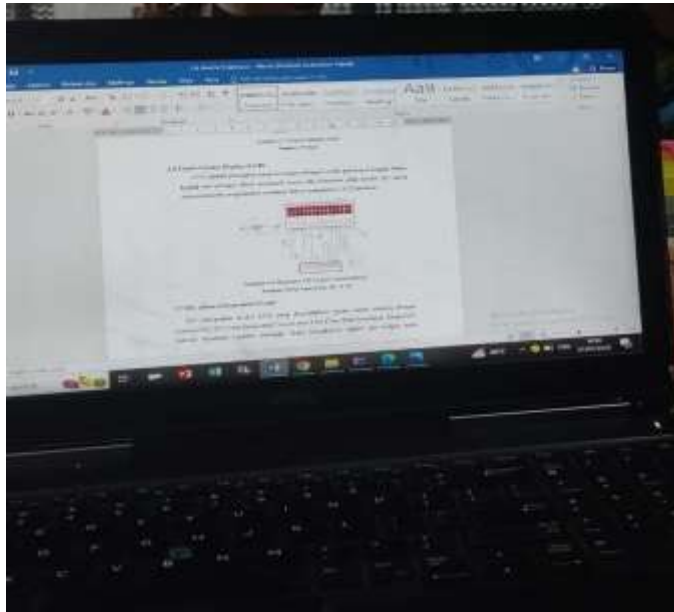

Mengerjakan Revisi Laporan.

Spesifikasi Modul HCSR04:


- Tegangan kerja: 5V DC.
- Arus kerja: 15mA.
- Jangkauan Maksimum: 4 m.
- Jangkauan Minimum: 2 cm.
- Sudut pengukuran: 15 derajat.
- Sinyal masukan pemacu: pulsa TTL 10 us.
- Resolusi: 1 cm.
- Frekuensi Ultrasonik: 40 kHz.



Spesifikasi Sensor Ultrasonik HC-SR04.

Ordering Information

Part No.	Temperature Code	Package Code	- Option Code	Standard part	Packing form
MLX90614	E (-40°C...85°C) K (-40°C...125°C)	SF (TO-39)	- X X X (1) (2) (3)	-000	-TU



(1) Supply Voltage/ Accuracy
A - 5V
B - 3V
C - Reserved
D - 3V medical accuracy

(2) Number of thermopiles:
A - single zone
B - dual zone
C - gradient compensated*

(3) Package options:
A - Standard package
B - Reserved
C - 35° FOV
D/E - Reserved
F - 10° FOV
G - Reserved
H - 12° FOV (refractive lens)
I - 5° FOV
K - 13° FOV

Spesifikasi Sensor MLX90614.

Loadcell 350kg Load cell 350 kg Sensor Timba...

[Detail Produk](#) [Ulasan](#) [Diskusi](#) [Rekom](#)



Specification:
 Rated Capacity: 350kg
 Cable length: 1m
 Accuracy Class: C3
 Rated Output: 2.00.3mV/V
 Non-linearity: 0.02% F.S
 Creep(30min): 0.0016% F.S
 Input Impedance: 406 +/- 10 Ohm
 Output Impedance: 350 +/- 3 Ohm
 Operation Temperature: -10~+40C
 Safe overload: 150%F.S
 Destructive Load: 200%F.S
 Excitation Recommended: 4-12VDC, Max:15vDC
 Cable Length: 2m
 4-wire with shield
 IP67 Rating
 Construction: aluminum alloy
 Dimensions: 145 x 40 x 24 mm
 Application for bench/counting scales,check weighing etc

Wiring:
 Black : Supply + (Exc +)
 White : Supply - (Exc -)
 Red : Out + (Signal +)
 Green : Out - (Signal -)

Spesifikasi Sensor Load Cell.

Automatic Wrist Watch Blood Pressure Monitor

[Detail Produk](#) [Ulasan](#) [Diskusi](#) [Rekomendasi](#)




Kondisi: Baru
 Min. Pemakaian: 1 Buah
 Etalase: [Semua Etalase](#)


*Mohon Tanyakan Stok Ketersediaan Terlebih Dahulu

Alat pengukur tekanan darah_x000D_
 Cara penggunaan : Pasang / Pakai di pergelangan tangan, tekan "On", hasil akan otomatis keluar_x000D_
 Fitur : Otomatis "off" dalam 3 menit apabila tidak digunakan. Dapat menyimpan sebanyak 60 pengukuran_x000D_
 Specification_x000D_
 Display: Digital LCD. Systolic & Diastolic Pressure. Large, Easy to Read Display. Power Supply: DC 3V AAA battery x 2 (NOT included)_x000D_
 Humidity and Temperature for Use: Humidity 30% - 80%RH
 Temperature 5C - 40C. Service Life: 10000 Times_x000D_
 Berat : 250gr_x000D_
 Ukuran : 70mm x 72mm x 23mm (package) : 90mm x 85mm x 50mm
 Lihat Lebih Seditit

Spesikasi tensimeter digital.

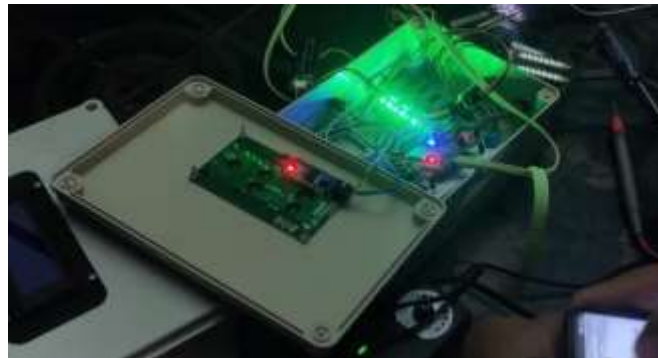

Perancangan Pada Alat.

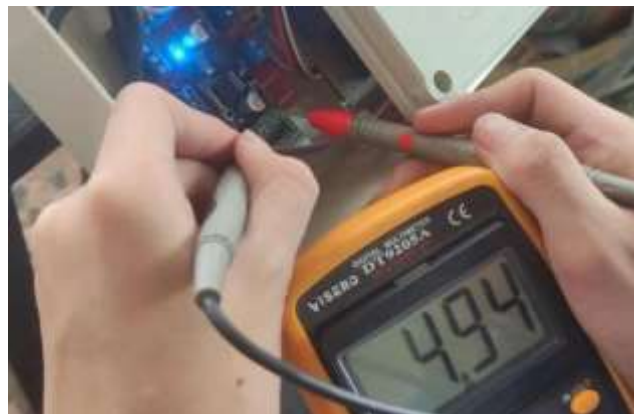

Pengukuran Tegangan Pada Sensor.



Pengujian Pada Alat.

