



LONG-RANGE 900 MHZ
OEM RF MODULE



XBEE-PRO® 900HP

Best-in-class range RF module features software-complete mesh or multipoint topologies with advanced sleep modes

XBee-PRO 900HP embedded modules provide best-in-class range wireless connectivity to devices. They take advantage of the DigiMesh® networking protocol, featuring dense network operation and support for sleeping routers, and are also available in a point-to-multipoint configuration. Supporting RF line-of-sight ranges up to 28 miles (with high-gain antennas), and data rates of up to 200 Kbps, these modules are ideal for extended-range applications requiring increased data throughput.

The XBee-PRO 900HP requires no programming and can be configured easily using Digi's free XCTU software or via a

simplified AT command set. XBee® modules are pre-certified for use in multiple countries, further reducing development costs and time to market.

The programmable version of the XBee-PRO 900HP module makes customizing long-range wireless applications easy. Programming directly on the module eliminates the need for a separate host processor. Because the wireless software is isolated, applications can be developed with no risk to RF performance, security or additional certifications.


BENEFITS

- Superior outdoor LOS range of up to 28 miles with high-gain antenna
- Over-the-air firmware updates via other XBee-PRO 900HP modules or Digi Device CloudSM
- Software-selectable channel mask for interference immunity
- Programmable versions of the XBee-PRO 900HP enable custom application development
 - 8-bit Freescale™ S08 microprocessor brings custom intelligence to the module
 - XBee-specific CodeWarrior® development tools for easy programming
- RF data rate up to 200 Kbps
- Patented channel selectivity algorithm allows for more dense networks

RELATED PRODUCTS



APPLICATION EXAMPLE

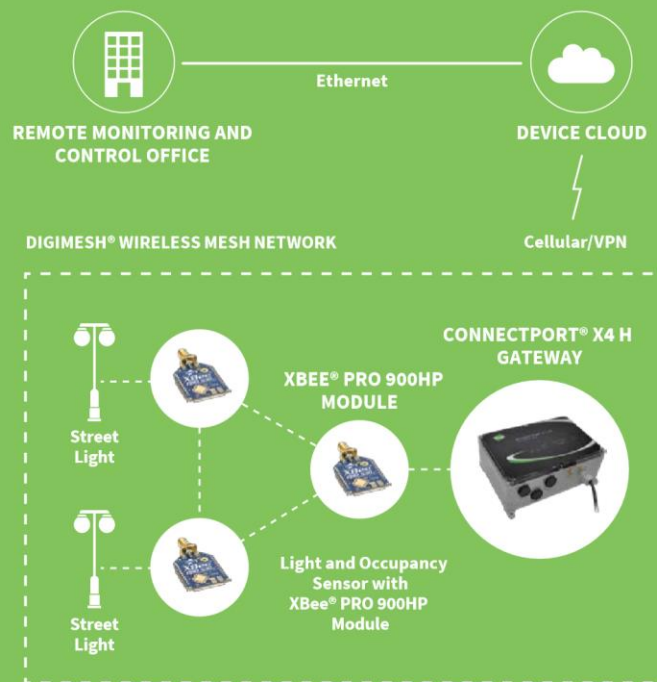

SPECIFICATIONS

XBee-PRO® 900HP

Programmable XBee-PRO® 900HP

HARDWARE		
PROCESSOR	ADF7023 transceiver, Cortex-M3 EFM32G230 @ 28 MHz; Programmable includes: Freescale MC9S08QE32	
FREQUENCY BAND	902 to 928 MHz, software selectable channel mask for interference immunity	
ANTENNA OPTIONS	Wire, U.FL and RPSMSA	
PERFORMANCE		
RF DATA RATE	10 Kbps or 200 Kbps	
INDOOR/URBAN RANGE	10 Kbps: up to 2000 ft (610 m); 200 Kbps: up to 1000 ft (305 m)	
OUTDOOR/ LINE-OF-SIGHT RANGE	10 Kbps: up to 9 miles (15.5 km); 200 Kbps: up to 4 miles (6.5 km) (with 2.1dB dipole antennas)	
TRANSMIT POWER	Up to 24 dBm (250 mW) software selectable	
RECEIVER SENSITIVITY	-101 dBm @ 200 Kbps, -110 dBm @ 10 Kbps	
FEATURES		
DATA INTERFACE	UART (3V), SPI	
GPIO	Up to 15 Digital I/O, 4 10-bit ADC inputs, 2 PWM outputs	
NETWORKING TOPOLOGIES	DigiMesh, Repeater, Point-to-Point, Point-to-Multipoint, Peer-to-Peer	
SPREAD SPECTRUM	FHSS (Software Selectable Channels)	
PROGRAMMABILITY		
MEMORY	N/A	32 KB Flash / 2 KB RAM
CPU/CLOCK SPEED	N/A	HCS08 / Up to 50.33 MHz
POWER		
SUPPLY VOLTAGE	2.1 to 3.6 VDC	2.4 to 3.6 VDC
TRANSMIT CURRENT	215 mA	229 mA
RECEIVE CURRENT	29 mA	44 mA
SLEEP CURRENT	2.5 uA	3 uA
REGULATORY APPROVALS		
FCC (USA)	MCQ-XB900HP	


IC (CANADA)	1846A-XB900HP
C-TICK (AUSTRALIA)	Yes
ANATEL (BRAZIL)	Yes
IDA (SINGAPORE)	Yes

(top view) (side views)

PART NUMBERS	DESCRIPTION
XBP9B-DMWT-002	XBee-PRO 900HP (S3B) DigiMesh, 900 MHz, 250 mW, Wire Antenna, 200 Kbps
XBP9B-DMST-002	XBee-PRO 900HP (S3B) DigiMesh, 900 MHz, 250 mW, RPSMA, 200 Kbps
XBP9B-DMUT-002	XBee-PRO 900HP (S3B) DigiMesh, 900 MHz, 250 mW, U.FL, 200 Kbps
XBP9B-DPWT-001	XBee-PRO 900HP (S3B) Point2Multipoint, 900 MHz, 250 mW, Wire Antenna, 10 Kbps
XBP9B-DPST-001	XBee-PRO 900HP (S3B) Point2Multipoint, 900 MHz, 250 mW, RPSMA, 10 Kbps
XBP9B-DPUT-001	XBee-PRO 900HP (S3B) Point2Multipoint, 900 MHz, 250 mW, U.FL, 10 Kbps
XBP9B-DMWTB002	XBee-PRO 900HP (S3B) DigiMesh, 900 MHz, 250 mW, Wire Antenna, 200 Kbps, 32 K Programmable
XBP9B-DMSTB002	XBee-PRO 900HP (S3B) DigiMesh, 900 MHz, 250 mW, RPSMA, 200 Kbps, 32 K Programmable
XBP9B-DMUTB002	XBee-PRO 900HP (S3B) DigiMesh, 900 MHz, 250 mW, U.FL, 200 Kbps, 32 K Programmable
XBP9B-DMWT-022	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Australia), 250 mW, Wire Antenna, 200 Kbps
XBP9B-DMST-022	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Australia), 250 mW, RPSMA, 200 Kbps
XBP9B-DMUT-022	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Australia), 250 mW, U.FL, 200 Kbps
XBP9B-DPWT-021	XBee-PRO 900HP (S3B) Point2Multipoint, 920 MHz (Australia), 250 mW, Wire Antenna, 10 Kbps
XBP9B-DPST-021	XBee-PRO 900HP (S3B) Point2Multipoint, 920 MHz (Australia), 250 mW, RPSMA, 10 Kbps
XBP9B-DPUT-021	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Australia), 250 mW, Wire Antenna, 200 Kbps, 32K Programmable
XBP9B-DMSTB022	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Australia), 250 mW, RPSMA, 200 Kbps, 32K Programmable
XBP9B-DMUTB022	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Australia), 250 mW, U.FL, 200 Kbps, 32K Programmable
XBP9B-DMWT-012	XBee-PRO 900HP (S3B) DigiMesh, 905/920 MHz, 250 mW, Wire Antenna, 200 Kbps (Brazil)
XBP9B-DMST-012	XBee-PRO 900HP (S3B) DigiMesh, 905/920 MHz, 250 mW, RPSMA Antenna, 200 Kbps (Brazil)
XBP9B-DMUT-012	XBee-PRO 900HP (S3B) DigiMesh, 905/920 MHz, 250 mW, U.FL Antenna, 200 Kbps (Brazil)
XBP9B-DPWT-011	XBee-PRO 900HP (S3B) Point2Multipoint, 905/920 MHz, 250 mW, Wire Antenna, 10 Kbps (Brazil)
XBP9B-DPST-011	XBee-PRO 900HP (S3B) Point2Multipoint, 905/920 MHz, 250 mW, RPSMA Antenna, 10 Kbps (Brazil)
XBP9B-DPUT-011	XBee-PRO 900HP (S3B) Point2Multipoint, 905/920 MHz, 250 mW, U.FL Antenna, 10 Kbps (Brazil)
XBP9B-DMSTB012	XBee-PRO 900HP (S3B) DigiMesh, 905/920 MHz, 250 mW, RPSMA, 200 Kbps, 32K Programmable (Brazil)
XBP9B-DMUTB012	XBee-PRO 900HP (S3B) DigiMesh, 905/920 MHz, 250 mW, Wire Antenna, 200 Kbps, 32K Programmable (Brazil)
XBP9B-DMWT-042	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Singapore), 250 mW, Wire Antenna, 200 Kbps
XBP9B-DMST-042	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Singapore), 250 mW, RPSMA, 200 Kbps
XBP9B-DMUT-042	XBee-PRO 900HP (S3B) DigiMesh, 920 MHz (Singapore), 250 mW, U.FL, 200 Kbps

FOR MORE INFORMATION

XBP9B-DPWT-041 XBee-PRO 900HP (S3B) Point2Multipoint, 920 MHz (Singapore), 250 mW, Wire Antenna, 10 Kbps

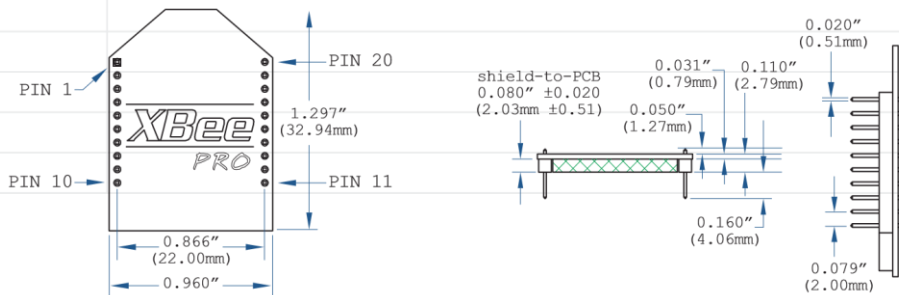

XBP9B-DPST-041 PLEASE VISIT XBee-PRO 900HP (S3B) Point2Multipoint, 920 MHz (Singapore), 250 mW, RPSMA, 10

Kbps **WWW.DIGI.COM**

XBP9B-DPUT-041 XBee-PRO 900HP (S3B) Point2Multipoint, 920 MHz (Singapore), 250 mW, U.FL, 10 Kbps

XKP9-DM-0 XBee-PRO 900HP S3B Dev Kit (Domestic)

XKP9-DMB0 XBee-Pro 900HP (S3B) Development Kit 32K Programmable

XKP9-DM-2 XBee-PRO 900HP S3B 920 MHz Dev Kit (Australia)

XKP9-DM-1 XBee-PRO 900HP S3B 920 MHz Dev Kit (Brazil)

XKP9-DM-4 XBee-PRO 900HP S3B 920 MHz Dev Kit (Singapore)

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.

All trademarks are the property of their respective owners.

91002310

B1/915

DIGI INTERNATIONAL WORLDWIDE HQ **DIGI INTERNATIONAL SINGAPORE**

877-912-3444 / 952-912-3444 / www.digi.com +65-6213-5380

DIGI INTERNATIONAL FRANCE **DIGI INTERNATIONAL CHINA**

+33-1-55-61-98-98 / www.digi.fr +86-21-50492199 / www.digi.com.cn **DIGI**

INTERNATIONAL JAPAN

+81-3-5428-0261 / www.digi-intl.co.jp

WWW.DIGI.COM

